


Advanced Java T.T. Real World Design



Simon Roberts



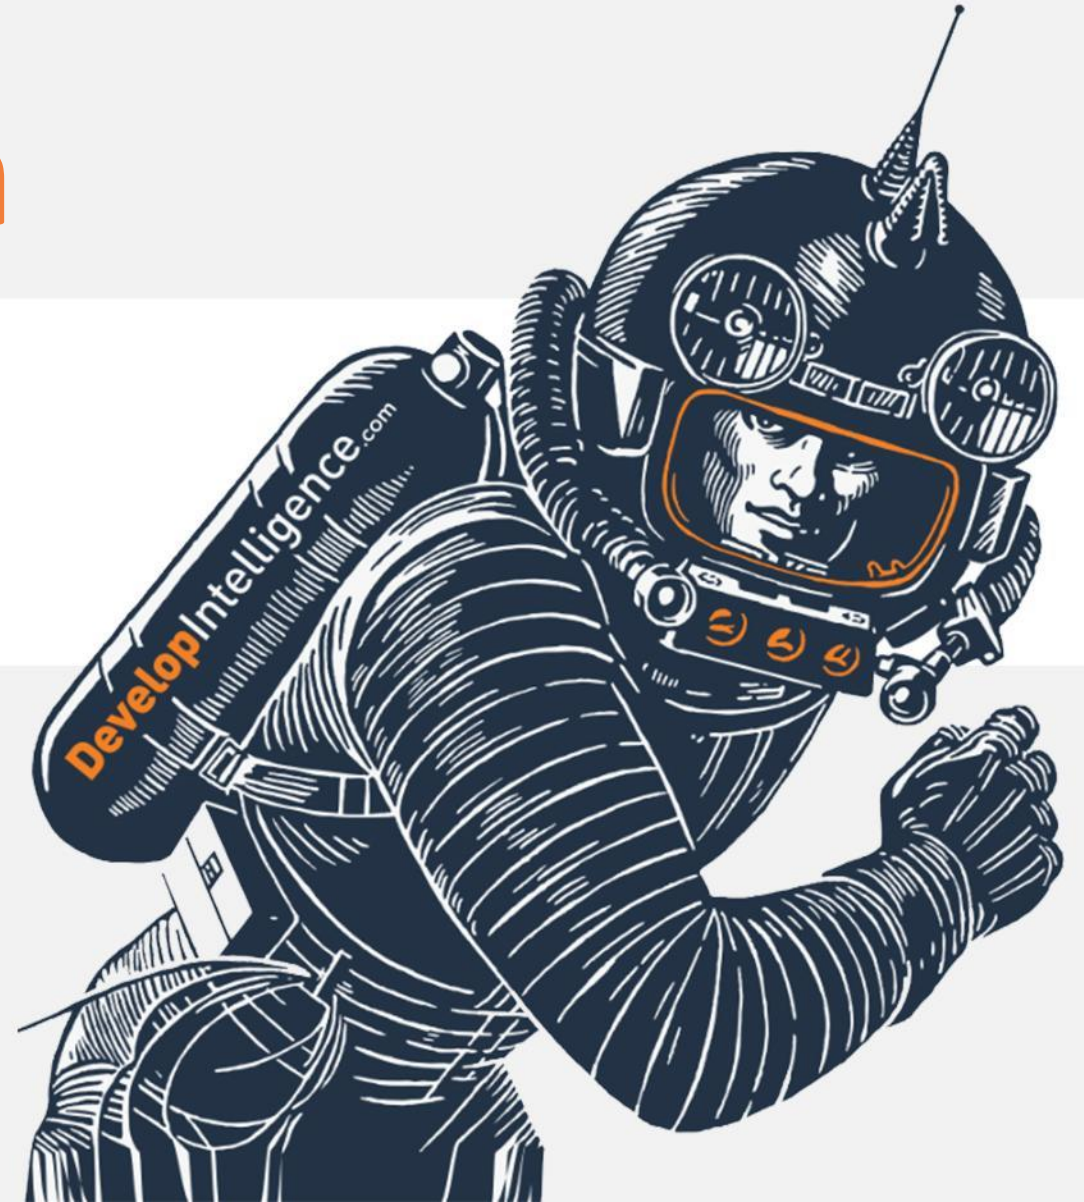

WELCOME



Mark Your Attendance:

- Go to the Course Calendar Invite
- Click on the Course Event Link
- Press Check-In



Join Us in Making Learning Technology Easier



Our mission...

Over 16 years ago, we embarked on a journey to improve the world by making learning technology easy and accessible to everyone.



...impacts everyone daily.

And it's working. Today, we're known for delivering customized tech learning programs that drive innovation and transform organizations.

In fact, when you talk on the phone, watch a movie, connect with friends on social media, drive a car, fly on a plane, shop online, and order a latte with your mobile app, you are experiencing the impact of our solutions.

Over The Past Few Decades, We've Provided

Over **62,300,000**
expert-led learning hours

In 2019 Alone, We Provided





Upskilling and Reskilling Offerings



Intimately customized learning experiences just for your teams.



Workshop

2-3 day upskilling experiences



Fast Track

5-day reskilling experiences



Learning Spike

1-day technology overviews



Target Topics

90-minute instructor-led micro-learnings



Hack-a-thon

Learn and build an MVP in 2-3 days

BACK END DEVELOPMENT

BIG DATA

CLOUD COMPUTING

DEVOPS

FRONT END DEVELOPMENT

MACHINE LEARNING

MOBILE APP DEVELOPMENT

SOFTWARE ENGINEERING


SYSTEM ADMINISTRATION



AND MANY OTHER TRENDING TECHNOLOGIES



World Class Practitioners

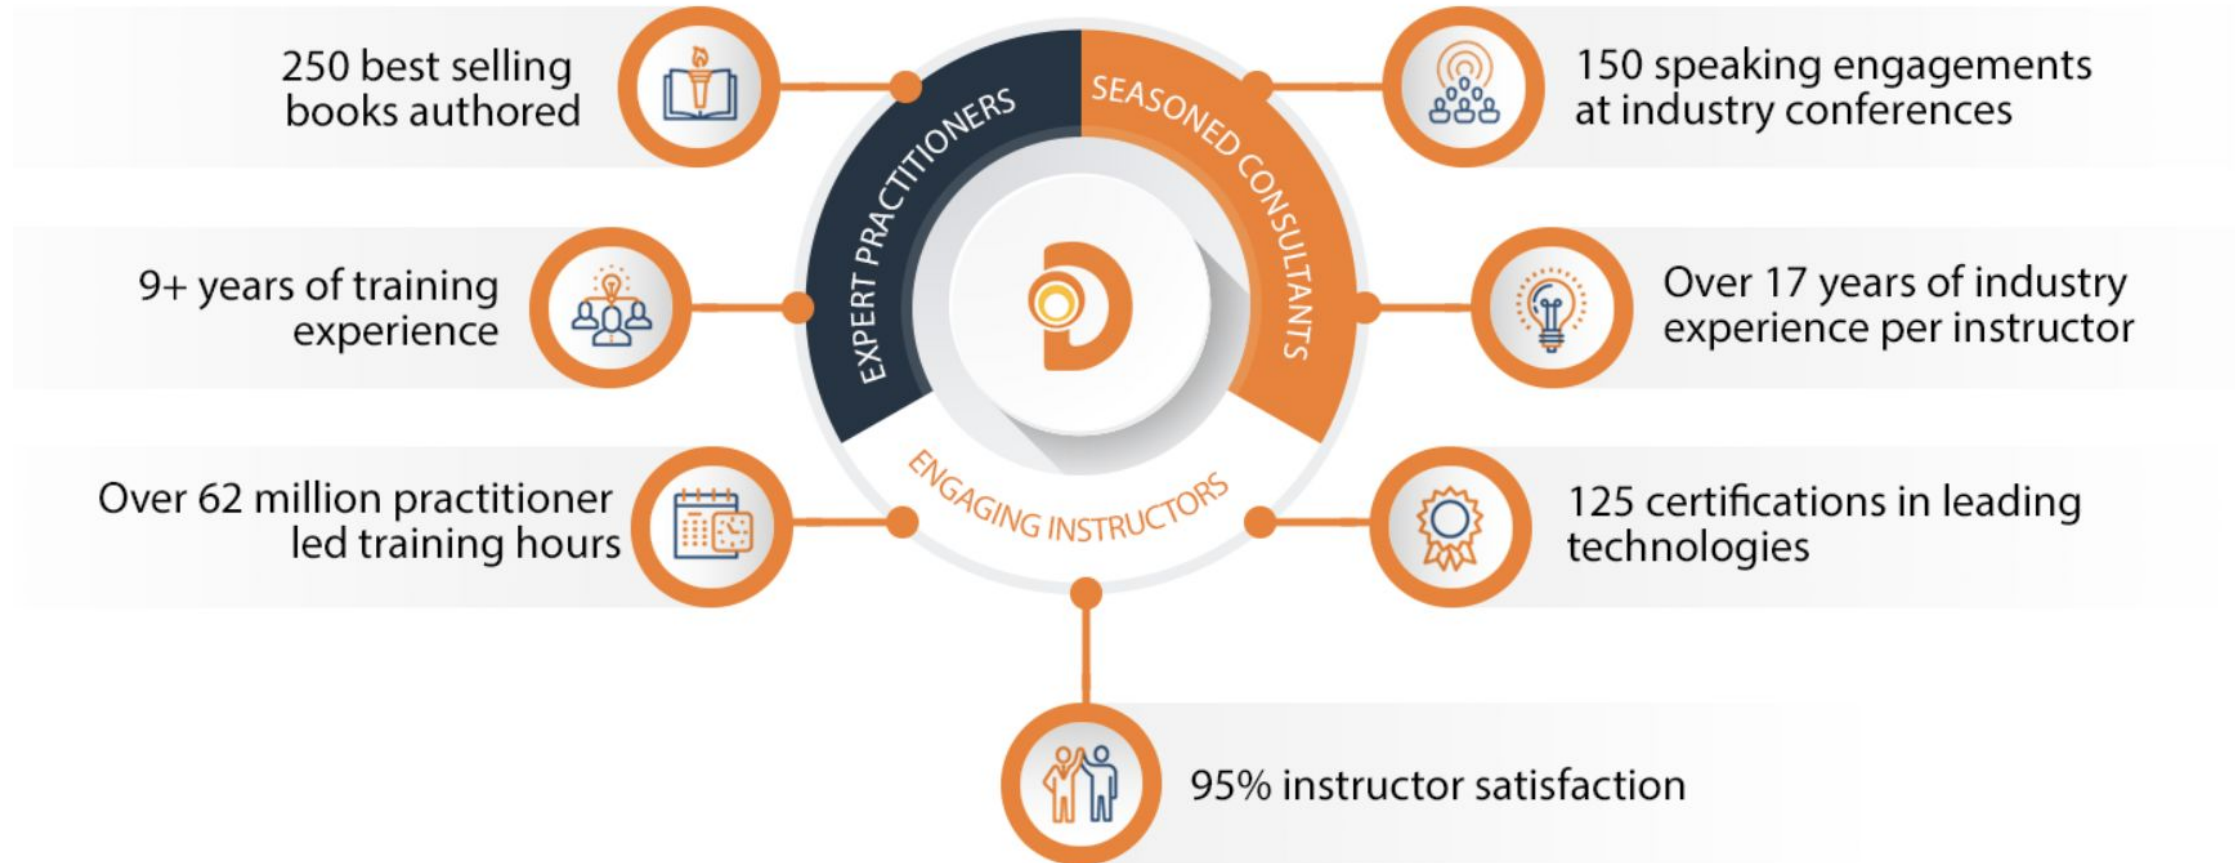



Recording Policy



Recordings are provided to participants who have attended the training, in its entirety. Recordings are provided as a value-add to your training, and should not be utilized as a replacement to the classroom experience.

Participants can expect the following:

- Recordings will be provided the Monday after class is completed
- Recordings will be provided for 14 days
- Recordings will be accessible as “View Only” status and cannot be copied
- Sharing recordings is strictly prohibited

To request recordings, please fill out the form linked in Learn++.

Thank you for your understanding and adhering to the policy.



Note About Virtual Trainings



What we want



...what we've got




Virtual Training Expectations for You



Arrive on time / return on time



Mute unless speaking

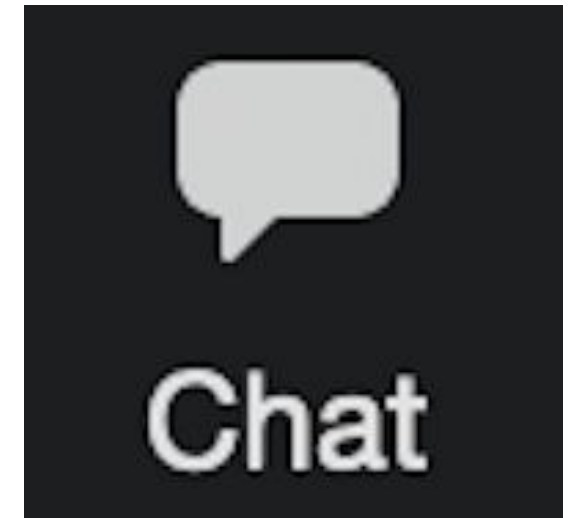

Use chat or ask
questions verbally



Virtual Training Expectations for Me



I pledge to:

- Make this as interesting and interactive as possible
- Ask questions in order to stimulate discussion
- Use whatever resources I have at hand to explain the material
- Try my best to manage verbal responses so that everyone who wants to speak can do so
- Use an on-screen timer for breaks so you know when to be back



Prerequisites



- Solid programming skills in an object oriented language
 - (any code examples will be presented in Java)
- Understanding of basic OO design concepts such as
 - inheritance
 - composition / association
 - argument passing in methods
- Basic awareness of business pressures and non functional requirements in software projects



At the end of this course you will be able to:

- Understand the need for a balanced response to conflicting pressures on a software project
- Describe how key aspects of software design have non-functional and business-related consequences
- Determine concerns of stakeholders that should be considered in the design process
- Describe the benefits and costs of several key design patterns




About you



In 90 seconds!

- What you hope to learn
- What your background level is

THANK YOU

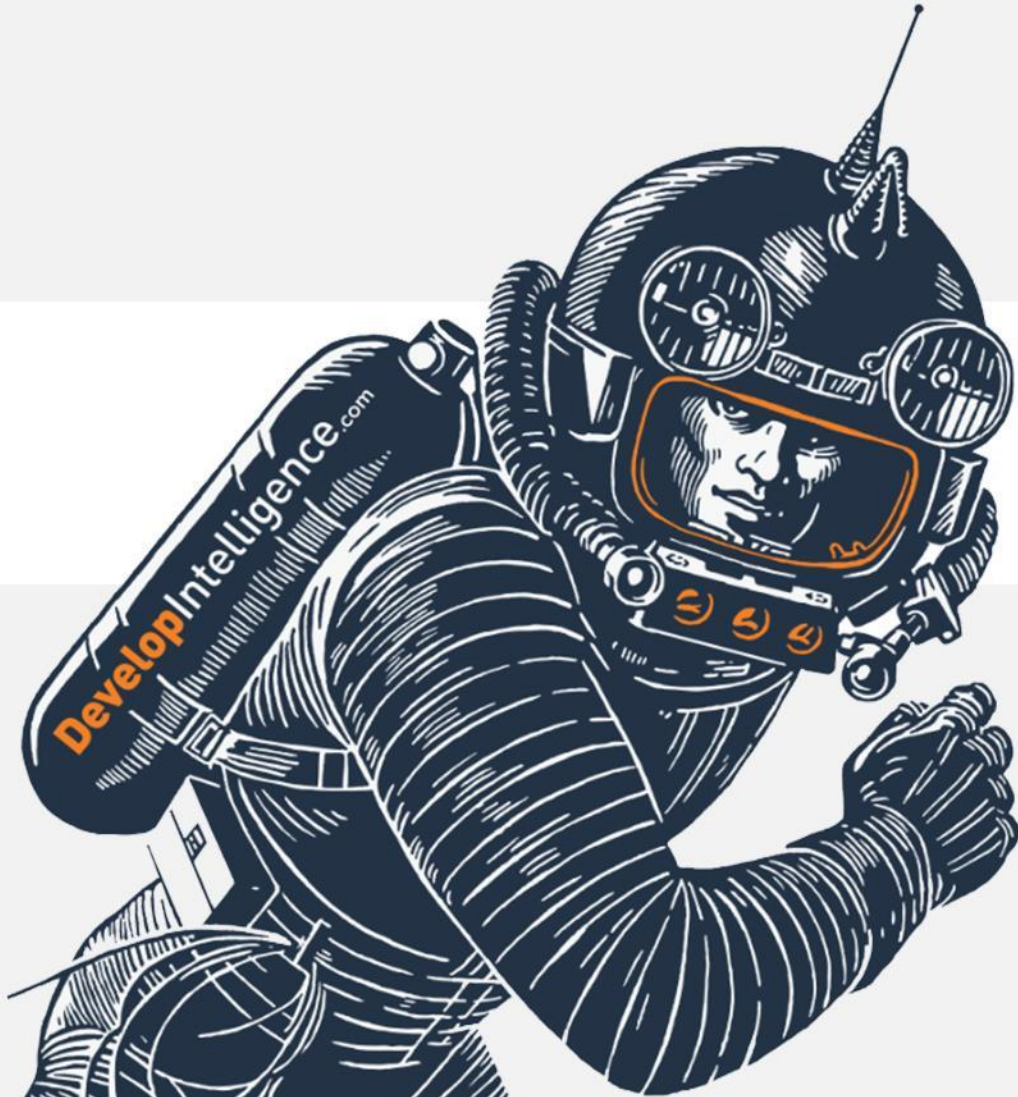



If a change from design A to design B is easy, and both satisfy the functional requirement, but a change from B to A is relatively hard, prefer design A unless there are other reasons to choose between them

- Make classes final until there is a determined need for inheritance, and the consequences are understood
- Prefer factories or builders over constructors
 - Constructors can only produce a new object of the exact type, or an exception
 - Any method can do this, but can do much more too
 - Removing constructors breaks clients, changing the implementation details of a method does not.



Consider preferring immutable data and structures

- This can avoid "that can't happen" moments where other users of data altered them unexpectedly
- Immutable data can be shared, perhaps reducing the need for copying and compensating for the need to make new data to describe variations on old data
- Sometimes an immutable proxy (such as `Collections.unmodifiableXxx`) serves well to prevent clients changing something while allowing the "owner" to change it.



Ensure that a business domain object is always "valid"

- Avoids unexpected states breaking client code
- Ensure any/all mutable fields are private
- Ensure that validity is verified prior to completing construction and before all changes
- Represent adjunct concepts (such as wire transfer and database storage) in secondary classes (e.g. a Data Transfer Object). Ensure the secondary class is dependent on the primary but not the other way round.



Keep in mind that a Set is intended to reject duplicates, and might be preferable to a List in some situations. However:

- Sets reject duplicates simply by returning false from their add methods. This is easy to overlook.
- Sets require objects that implement equals/hashcode or ordering, and it's not always clear which is required if you simply have a `java.util.Set`.
- Most (but not all) core Java objects do not implement equals/hashcode unless they're immutable (String, primitive wrappers, `java.time` classes, for example)



Key concerns of professional software projects

Profit - costs now / costs later

Time to market - lost market share is hard to regain

Change - requirements, team members, deployment environments, supporting components, and much more

Limit the consequences of change



What's up with implementation inheritance?

Benefit: (internal) code reuse - write the behavior for the general case, it's then automatically provided to the special cases

Benefit: generalization (external code reuse) - code written on the generalization, automatically works on specializations (maintain Liskov substitutability!)

Problem: *in class-based languages* behavior is fixed at instant of construction

Problem: *in single-inheritance languages* variations in behaviors are limited to a single dimension of change

Using inheritance can impede handling change



Generalization and code reuse without inheritance



Dynamically typed languages often avoid these issues. JavaScript's prototypal inheritance in particular bypasses all these issues, while losing the large-project advantages of static strong type checking

Interfaces provide generalization with no strings attached

Variables referring to behavior (methods/functions) provide for *variability* of behavior. This is often called delegation and is key to several core "Gang of Four" design patterns

Generalize using interfaces, vary behavior with variables



Simple principles limiting consequences of change



Keep together what belongs together

so you know where to look

Keep apart what belongs apart

don't put something into a class simply for lack of a better place

Keep together what changes together

packages, libraries, services; keep all the changes in one "unit"

Keep apart what changes independently

avoid confusion, accidental damage, and merge conflicts



Strategy pattern



Clients see a single object type.

Behavior variations through member variables (fields) in the object, these are called **strategy objects**.

These member variables are each of an interface type, groups of strategies implement the same interface. Prefer more fine grained interfaces.

External behaviors can delegate to "strategy" objects and can change at runtime.

Based on domain requirements, the object can provide methods to change those strategies, and impose rules on what changes are permitted.



Command pattern



An argument to a function or method exists primarily for the purpose of the behavior that argument provides, rather than for data / state.

The called function delegates to the behavior embedded in that argument.

Similar to strategy in that objects are used for the behavior they contain, and behavior can vary.

Differs from strategy in that the behavior that supports an operation is provided along with the request to perform that action, rather than being stored ready for future use.



Factories and builders



Invoking a constructor results in either a *new* object of exactly the *named type*, or an exception.

Multiple constructors must generally differ by argument type-list (overloads)

Other methods that return objects can return any assignment compatible object, new or old.

Changing from constructors to methods returning objects would be a consequential change, but there's never a reason to change in the opposite direction

Changes of approach often have asymmetric consequences



Creating behaviors



Since objects can exist for the behavior they contain, functions can return behaviors.

Using closure, a function can return a new behavior based on behavior embedded in an argument to that function.

Such approaches might be called *behavior factories*, *function decorators*, or *function transformers*.



Iterator and iterable

Data structure (the iterable) varies independently of the clients of that structure, hence iteration should be "kept with" the data structure.

Iteration progress varies with the client, so progress must be a per-client feature.

The Iterator class describes iteration progress, and has privileged knowledge about data structure, but is instantiated separately from the structure class.

The Iterable instantiates the Iterator in response to clients' requests.

Requires language features (e.g. inner classes) to provide privileged access to the data structure.



A container of data (such as a List) that provides a means of applying a transformation to every item it contains, and produces a new container of the same type that contains the results

Conventional method name is called map

Takes a function (behavior, or object that defines the operation) as an argument (as per the command pattern)

Should not change the input data in any way

Can hide (and therefore hide changes in) the means of applying the operation to the data. E.g. can execute in multiple concurrent, or distributed, threads.



Monad



Similar to a Functor, but provides a flatmap operation which accepts a behavior that produces a result embodied in another Monad (usually of the same type)

Allows a 1 to N relationship between input items and output results (contrast with Functor which has a 1 to 1 relationship)