

Week 46

Table of contents

1 Python: Introduction to curve fitting	1
2 Estimation of binding affinity	6
3 Dialysis experiment	7
4 Interpretation of binding data.	9
5 Determination of type and strength of cooperativity	12
6 Competition in ligand binding	15
7 Difference between Q and K_{eq}	17
8 Determination of ΔH° for a reaction from the van't Hoff plot.	18
9 ATP hydrolysis	21

```
try:
    import fysisk_biokemi
    print("Already installed")
except ImportError:
    %pip install -q "fysisk_biokemi[colab] @ git+https://github.com/au-mbg/fysisk-biokemi.git#subdirectory=course-utils"
```

1 Python: Introduction to curve fitting

```
import numpy as np
import matplotlib.pyplot as plt
from scipy.optimize import curve_fit
```

Curve fitting is a fundamental skill in biochemistry and biophysics for analyzing experimental data. We use curve fitting to determine parameters in mathematical models that describe biological processes like enzyme kinetics, binding affinity, and reaction rates.

The basic idea is to find the parameters of a mathematical function that best describes our experimental data.

(a) Understanding the problem

Real biochemical data often requires complex fitting functions. Therefore, we will start out with a simpler data that follows a linear relationship. The data below represents a theoretical experiment where we measure some output y at different input values x :

```
## This makes two arrays (columns) ##
## One with the x coordinates ##
## One with the y coordinates ##
x_data = np.array([1, 2, 3, 4, 5, 6, 7, 8, 9, 10])
y_data = np.array([2.1, 4.2, 6.0, 7.8, 10.1, 12.2, 13.9, 16.1, 18.0, 20.2])
```

The functions above simply make two arrays - i.e. columns of data - containing the number. You can view the content of these columns by with `print(x_data)` or `print(y_data)`.

```
fig, ax = plt.subplots()

## Your task: Plot the data as a scatter plot ##
## Recall that you can do this with: ax.plot(x_data, y_data, 'o')
...
```

Looking at this data, we can see it roughly follows a straight line. Let's assume our model is:

$$y = ax + b$$

where a and b are parameters we want to determine from the data.

(b) Defining a fitting function

To use `scipy.optimize.curve_fit`, we need to define a function where:

- The **first** argument is the independent variable (x)
- The remaining arguments are the parameters to be fitted

Define a linear function for fitting:

```
def linear_function(x, a, b):
    ## Your task: Calculate the linear function ##
    result = ...
    return result
```

Always a good idea to check that your function works as expected

As a test we are adding 1 in the place of x , 2 in the place of a and 0 in the place of b . In other words: $1 \cdot 2 + 0 = 2$

```
linear_function(1, 2, 0) # Should give 2
```

When in doubt it is a good idea to do sanity checks like this.

(c) Your first curve fit

Now we can use `curve_fit` to find the best parameters. The basic syntax is:

```
fitted_parameters, trash = curve_fit(function, x_data, y_data, p0=initial_guess)
```

Where:

- `function`: The function we defined above
- `x_data, y_data`: Our experimental data
- `p0`: Initial guess for parameters (optional but recommended)
- `fitted_parameters`: The optimized parameters (what we want!)
- `trash`: Don't worry about this.

Finish the cell below to perform the curve fit by adding the three missing arguments to the call to `curve_fit`.

```
# Initial guess: a=2, b=0
initial_guess = [2, 0]

## Your task: Perform the fit ##
## You need give the function three arguments ##
## The function: linear_function ##
## The x-data: x_data
## The y-data: y_data
fitted_parameters, trash = curve_fit(..., ..., ..., p0=initial_guess)

## Extract parameters ##
a_fit, b_fit = popt

print(fitted_parameters)
print(a_fit)
print(b_fit)
```

(d) Visualizing the fit

It's crucial to always plot your fit to see how well it describes the data. To do this we evaluate the function with the fitted parameters and a densely sampled independent variable.

```
## This makes an array with 100 equally spaced points between 0 and 11. ##
x_smooth = np.linspace(0, 11, 100)

## Your task: Calculate linear_function using x_smooth, a_fit and b_fit ##
y_fit = ...
```

Then we can plot it

```
fig, ax = plt.subplots()

## Your task: Plot the fitted function using x_smooth and y_fit ##
ax.plot(..., ...)

## Plots the experimental data ##
ax.plot(x_data, y_data, 'o')
```

(e) Nonlinear fitting: Exponential decay

Many biological processes follow nonlinear relationships. Let's work with exponential decay, which is common in biochemistry (e.g., radioactive decay or unimolecular chemical reactions).

You can load the dataset from the `exp_decay_data.xlsx`-file with the widget below

```
from fysisk_biokemi.widgets import DataUploader
from IPython.display import display
uploader = DataUploader()
uploader.display()
```

Run the next cell **after** uploading the file

```
df = uploader.get_dataframe()
display(df)
```

Now make a plot of the data

```
# Generate exponential decay data
fig, ax = plt.subplots()

## Your task: Plot the data from the dataframe 'df'. ##
## Recall that you get the time-column as df['time'] ##
## Similarly you get the signal-column as df['signal'] ##
ax.plot(..., ...)
```

The model we want to fit is:

$$\text{signal} = Ae^{-kt}$$

Define the exponential decay function:

```
def exponential_decay(t, A, k):
    ## Your task: Calculate the exponential function ##
    ## Remember that np.exp calculates the exponential function ##
    result = ...
    return result

## This calculates the function for t=1, A=1, k=1 ##
## If you did it correctly you should see 0.3678...
test_result = exponential_decay(1, 1, 1)
print(test_result)
```

Now fit the exponential function to the data:

```
## We set the initial guess as A=8 and k=1 ##
initial_guess = [8, 1]

## Your task: Make the fit using the exponenital_decay function, and the time and signal
data.
##
fitted_parameters, trash = curve_fit(..., ..., ..., p0=initial_guess)

# Extract parameters
A_fit, k_fit = fitted_parameters

print(A_fit)
print(k_fit)
```

Again we should plot to check that it looks as expected

```
## This makes 100 linearly spaced points between 0 and 5.  
t_smooth = np.linspace(0, 5, 100)  
  
## Your task: Calculate the function using the fitted parameters and t_smooth. ##  
signal_fit = ... # Evaluate using the exponential_decay function
```

Now we can plot the fit along with the data.

```
fig, ax = plt.subplots()  
  
## Your task: Plot the observations - you can copy this line from the ##  
## previous plot. ##  
ax.plot(..., ...)  
  
## Your task: Plot the fit using t_smooth and signal_fit  
ax.plot(..., ...)
```

💡 Key points for successful curve fitting:

1. **Always plot your data first** to understand what kind of function might fit
2. **Always plot the fit** to visually check if it makes sense
3. **Check if parameters are reasonable** based on your biochemical knowledge

! Summary of curve_fit

Fitting refers to finding the parameters that make an assumed functional form best ‘fit’ the data.

In Python we will use the curve_fit from the scipy package to do so. The function looks like this

```
curve_fit(function,  
          x_data,  
          y_data,  
          p0=[param_1, param_2, ...])
```

The arguments are

- function: A python function where the **first** argument is the independent variable (typically the x coordinate), and other arguments are the parameters of the functions.
- x_data: The observed values of the independent variable (The x coordinates).
- y_data: The observed values of the dependent variable (The y coordinates) .
- p0: Initial guesses for the parameters.

When called curve_fit starts by calculating how well the functions fits the data with the initial parameters in p0 and then iteratively improves the fit by trying new values for the parameters in an intelligent way.

The found parameters will generally depend on p0 and it is therefore necessary to provide a good (or good enough) guess for p0.

Generally, the best way to learn more about a function is to read it’s documentation and then play around with it. The documentation is in this case on the SciPy website. You don’t need to read it, unless you want more details.

You now have the fundamental skills needed to fit curves to biochemical data! In the exercises, you’ll apply these techniques to analyze real experimental data and extract meaningful biological parameters.

2 Estimation of binding affinity

(a) Train estimation skills

Train your estimation skills using the widget below.

```
from fysisk_biokemi.widgets.utils.colab import enable_custom_widget_colab  
from fysisk_biokemi.widgets import estimate_kd  
  
enable_custom_widget_colab()  
estimate_kd()
```

(b) Compare to quadratic

The widget below shows the curves for θ using both the simple expression assuming that $L = L_{tot}$ and the quadratic binding expression. Vary K_D and P_{total} to work out a rule of thumb for when the two equations give a similar curve.

```

from fysisisk_biokemi.widgets.utils.colab import enable_custom_widget_colab
from fysisisk_biokemi.widgets import visualize_simple_vs_quadratic

enable_custom_widget_colab()
visualize_simple_vs_quadratic()

```

3 Dialysis experiment

```

import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
pd.set_option('display.max_rows', 6)

```

A dialysis experiment was set up where equal amounts of a protein were separately dialyzing against buffers containing different concentrations of a ligand – each measurement was done in triplicate. The average number of ligands bound per protein molecule, $\bar{n}$ were obtained from these experiments. The corresponding concentrations of free ligand and values are given in dataset dialys-exper.xlsx.

(a) Load the dataset

```

from fysisisk_biokemi.widgets import DataUploader
from IPython.display import display
uploader = DataUploader()
uploader.display()

```

Run the next cell **after** uploading the file

```

df = uploader.get_dataframe()
display(df)

```

(b) Explain calculation of $\bar{n}$

Explain how the values of $\bar{n}$ is calculated when knowing the concentrations of ligand inside and outside the dialysis bag, as well as the total concentration of the protein, $[P_{\text{tot}}]$.

(c) Molar concentrations

Convert the concentrations of free ligand to SI-units given in M, add it as a row to the DataFrame.

```

## Your task: Convert the concentration to SI units (from uM to M).
## The column containing the data in uM can be indexed with: df['Free_ligand_(uM)']
df['Free_ligand_(M)'] = ...
display(df)

```

(d) Plot the data

```

fig, ax = plt.subplots()

```

```

## Your task: Plot the raw data
## With the ligand concentration df['Free_ligand_(M)'] on the x-axis
## And with n-bar df['n_bar'] on the y-axis.
ax.plot(..., ..., 'o')

```

(e) Prepare for fitting

Now we want to fit the data to extract K_D and n , by using the equation

$$\bar{n}([L_{\text{free}}]) = N \frac{[L_{\text{free}}]}{K_D + [L_{\text{free}}]}$$

To do so we need to implement it as a Python function

```

def nbar(L, N, K_D):
    ## Your task: Calculate n-bar using the equation from above.
    result = ...
    return result

## This calculates the function and prints for two different sets of values ##
print(nbar(1, 1, 1)) # Should give 1/2
print(nbar(21, 47, 2.5)) # Should give 42

```

(f) Actually fitting

Finish the code to perform the fitting in the cell below.

```

from scipy.optimize import curve_fit

# Choose the variables from the dataframe
x = df['Free_ligand_(M)']
y = df['n_bar']

## Your task: Make initial guesses for the two parameters ##
K_D_guess = ... # Your initial guess for K_D
N_guess = ... # Your initial guess for N.
initial_guess = [K_D_guess, N_guess]

## Your task: Give the four arguments in the correct order to make calculate ##
## the fitted parameters ##
fitted_parameters, trash = curve_fit(..., ..., ..., ...)

# Print the parameters
N_fit, K_D_fit = fitted_parameters
print(fitted_parameters)
print(N_fit)
print(K_D_fit)

```

Are the parameters you find reasonable? How can you tell if they are reasonable by looking at the plot you made earlier?

(g) Plot with fit

When we have the fitted parameters we can calculate and plot the function. To do so we make an array of values for the independent variable and use our function to calculate the dependent variable

```
## This makes 50 equally spaced points ##
L_smooth = np.linspace(0, x.max()*1.2, 50)

## Your task: Calculate the fitted function using the found parameters and L_smooth
nbar_calc = ...
```

Now that we calculated the dependent variable we can plot the fit along with the data.

```
fig, ax = plt.subplots()

## Your task: Plot the fitted function ##
ax.plot(..., ...)

## Plots the data ##
ax.plot(df['Free_ligand_(M)'], df['n_bar'], 'o')
```

4 Interpretation of binding data.

```
import numpy as np
import pandas as pd
from fysisk_biokemi.widgets import DataUploader
from IPython.display import display
import matplotlib.pyplot as plt
from scipy.optimize import curve_fit
pd.set_option('display.max_rows', 6)
```

The inter-bindin-data.xlsx contains a protein binding dataset.

(a) Load the dataset

Load the dataset using the widget below

```
uploader = DataUploader()
uploader.display()
```

Run the next cell **after** uploading the file

```
df = uploader.get_dataframe()
display(df)
```

(b) SI Units

Add a new column to the DataFrame with the ligand concentration in SI units.

```
## Your task: Add a column with the concentration in M ##
## Call this column df['[L]_(M)'] ##
## Recall that you can say df['[L]_(M)'] = df["[L]_(uM)"] * XXX ##
## Where XXX is the factor to multiply by. ##
df[...] = df[...] * XXX
display(df)
```

(c) Plot the data

Make plots of the binding data directly with a linear and logarithmic x-axis.

Estimate K_D by visual inspection of these plots!

```
import matplotlib.pyplot as plt

# This makes a figure with two axes.
fig, axes = plt.subplots(1, 2)

## We index with [0] to plot in the first axis. ##
## Don't worry about remembering this ##
ax = axes[0]

## Your task: Plot the data [L]_(M) vs nbar.
ax.plot(..., ..., 'o') # Replace ... with your code.

## We index with [0] to plot in the first axis. ##
## Don't worry about remembering this ##
## We will make this a log plot ##
ax = axes[1]

## Your task: Plot the data [L]_(M) vs nbar.
## Same exact code as above
ax.plot(..., ..., 'o') # Replace ... with your code.

## This makes it a log plot ##
## You do not need to remember or understand this in detail ##
ax.set_xscale('log')
```

Note

This command `ax.set_xscale('log')` tells matplotlib that we want the x-axis to use a log-scale.

```
K_D_estimate = ...
```

(d) Make a fit

Make a fit to determine K_D , as always we start by implementing the function to fit with

```
def nbar(L, K_D):
    ## Your task: Implement the function to fit with
    ## Use your biochemical knowledge to decide which function that is.
    result = ...
    return result
```

And then we can make the fit

```
## Your task: Choose the variables from the dataframe ##
x = ... # Choose x-data from the dataframe
y = ... # Choose y-data from the dataframe

## Initial guess ##
initial_guess = [K_D_estimate] # Using your estimate as the initial value for K_D

## Your task: Finish the curve fitting
fitted_parameters, trash = ... # Call the curve_fit function.

# Print the parameters
K_D_fit = fitted_parameters[0]
print(K_D_fit)
```

(e) Compare

Compare the fitted values with your guess.

```
## These lines make equally spaced points on a normal linear axis ##
## And on a logarithmic axis. ##
L_smooth = np.linspace(0, df['[L]_(M)'].max(), 100)
L_smooth_log = np.geomspace(df['[L]_(M)'].min(), df['[L]_(M)'].max(), 100)

## Your task: Evaluate the fitted function with L_smooth and L_smooth_log ##
nbar_fit = n_bar(..., K_D_fit)
nbar_fit_log = n_bar(..., K_D_fit)
```

Now we can make a plot.

```
## This plot uses some extra commands to make it look nice, don't worry
## about it - you don't need to understand all the details.

# This makes a figure with two axes.
fig, axes = plt.subplots(1, 2, figsize=(9, 4))

# Index with [0] to plot in the first axis - Linear plot
ax = axes[0]
ax.plot(df['[L]_(M)'], df['nbar'], 'o', color='C0')
ax.plot(L_smooth, nbar_fit, color='C2')

ax.axvline(K_D_estimate, label='Estimate', color='C1')
ax.axvline(K_D_fit, label='Fit', color='C2')
```

```

ax.set_xlabel('[L](M)', fontsize=14)
ax.set_ylabel(r'$\bar{n}$', fontsize=14)
ax.legend()

# Index with [1] to plot in the second axis - Log plot.
ax = axes[1]
ax.plot(df['[L](M)'], df['nbar'], 'o', color='C0')
ax.plot(L_smooth_log, nbar_fit_log, color='C2')

ax.set_xlabel('[L](M)', fontsize=14)
ax.set_ylabel(r'$\bar{n}$', fontsize=14)
ax.axvline(K_D_estimate, label='Estimate', color='C1')
ax.axvline(K_D_fit, label='Fit', color='C2')
ax.legend()
ax.set_xscale('log')

```

(f) Saturation

Based on the value of K_D found from the fit,

- At which concentration do you expect 10% saturation?
- At which concentration do you expect 90% saturation?

5 Determination of type and strength of cooperativity

```

import matplotlib.pyplot as plt
import numpy as np
from fysisk_biokemi.widgets import DataUploader
from IPython.display import display
from scipy.optimize import curve_fit

```

The binding of NAD⁺ to the protein yeast glyceraldehyde 3-phosphate dehydrogenase (GAPDH) was studied using equilibrium dialysis. The enzyme concentration was 71 μM. The concentration of [NAD_{free}⁺] and the corresponding values of $\bar{n}$ were determined with the resulting data found in the dataset `deter-type-streng-coope.xlsx`.

The dataset consists of three independent repetitions of the same experiment.

(a) Load the dataset

Load the dataset using the widget below

```

uploader = DataUploader()
uploader.display()

```

Run the next cell **after** uploading the file

```

df = uploader.get_dataframe()
display(df)

```

(b) Averaging and units.

Start by adding a new column to the DataFrame with the average value of $\bar{n}$ across the three series



Tip

Remember that you can set a new column based on a computation using one or more other columns, e.g.

```
df['new_col'] = df['col1'] + df['col2']
```

```
## Your task: Calculate the of the values in the three columns ##  
## nbar1, nbar2, nbar3 ##  
df['nbar_avg'] = ...
```

Now also add a column with the ligand concentration in SI units with the column-name [NAD+free]_(M).

```
## Task: Calculate the ligand concentration in M and ##  
## set it as a new column with the name '[NAD+free]_(M)'  
... # Your code here.  
display(df)
```

Finally, set the concentration of the GADPH in SI units

```
## Task: Convert the GADPH concentration to M ##  
## Set it to the variable c_gadph ##  
## Add a comment about the unit ##  
c_gadph = ...
```

(c) Plot

Make a plot of the average $\bar{n}$ as a function of $[\text{NAD}_{\text{free}}^+]$.

```
fig, ax = plt.subplots()  
  
## Your task: Add plot of nbar vs [NAD+_free]_(M)  
...
```

(d) Scatchard plot

Make a Scatchard plot based on the average $\bar{n}$.

```
# Your task: Calculate nbar / L  
nbar_over_L = ...  
  
fig, ax = plt.subplots()  
  
# Your task: Choose the right things to make a Scatchard plot.  
ax.plot(..., ... 'o')
```

(e) Binding sites

Estimate by eye how many bindings sites GAPDH contains for NAD⁺?

(f) Cooperativity

Based on a visual inspection of the plot above, are there in signs of cooperativity? If so, which kind?

(g) Fit

Make a fit using the functional form

$$\bar{n} = N \frac{[L]^h}{K + [L]^h}$$

As usual, start by defining the function in Python

```
def n_bar(L, N, K, h):  
    ## Your task: Implement the function  
    # Be careful with parentheses!  
    result = ...  
    return result
```

Now we can fit

```
## We want to use all the data for the fit, but it was given in three different columns.  
## We stitch it together to make a column containing all x-coordinates  
## And another column containing all y-coordinates  
x = np.concatenate([df['[NAD+free]_(M)'], df['[NAD+free]_(M)'], df['[NAD+free]_(M)'])  
y = np.concatenate([df['nbar1'], df['nbar2'], df['nbar3']])  
  
## Your task: Make initial guesses for the three parameters  
## The order is that of the function  
## So N, K and h.  
initial_guess = [..., ..., ...]  
  
## Your task: Make the fit  
## Note: The bounds argument has been added to have the function  
## only explore positive sets of parameters.  
fitted_parameters, trash = curve_fit(..., ..., ..., ..., bounds=(0, np.inf))  
  
# Print the parameters  
N_fit, K_fit, h_fit = fitted_parameters  
print('N_fit', N_fit)  
print('K_fit', K_fit)  
print('h_fit', h_fit)
```

Do the fitted parameters support your intuitive reading of the type of cooperativity?

i Note

In the data sets used, repeated experiments were given as a three separate columns, which is a quite natural way of recording data during an experiment. However, it is not an appropriate format for regression, where we want all the data-points in a single column. In this exercise we did a bit of *data wrangling* to make the data appropriate for what we want to do with it - in this case by creating a new joint column containing all the data by using the `np.concatenate` function.

6 Competition in ligand binding

Below is given the general expression for saturation of a binding site by one of the ligands, L , when two ligands L and C are competing for binding to the same site on a protein. Assume that $[P_T] = 10^{-9}$ M.

$$\theta_L = \frac{[PL]}{[P_T]} = \frac{1}{\frac{K_D}{[L]} \left(1 + \frac{[C]}{K_C}\right) + 1}$$

Consider these four situations

#	$[L_T]$	$[C_T]$	K_D	K_C
1	$1 \cdot 10^{-3}$ M	0	$1 \cdot 10^{-5}$ M	$1 \cdot 10^{-6}$ M
2	$1 \cdot 10^{-3}$ M	$1 \cdot 10^{-2}$ M	$1 \cdot 10^{-5}$ M	$1 \cdot 10^{-6}$ M
3	$1 \cdot 10^{-3}$ M	$1 \cdot 10^{-3}$ M	$1 \cdot 10^{-5}$ M	$1 \cdot 10^{-5}$ M
4	$1 \cdot 10^{-5}$ M	$1 \cdot 10^{-6}$ M	$1 \cdot 10^{-5}$ M	$1 \cdot 10^{-6}$ M

(a) Explain simplification

Explain how the fact that $[P_T]$ is much smaller than $[L_T]$ and $[C_T]$ simplifies the calculations using the above equation.

(b) Ligand degree of saturation

Calculate the degree of saturation of the protein with ligand L in the four situations.

Start by writing a Python function that calculates the degree of saturation θ .

```
def bound_fraction(L, C, Kd, Kc):  
    ## Your task: Write the equation for binding saturation.  
    ## Be careful with parentheses!  
    theta = ...  
    return theta
```

Then use that function to calculate θ_L for each situation.

```
## Your task: Calculate the degree of saturation for each set of parameters ##  
theta_L_1 = bound_fraction(..., ..., ..., ...)  
theta_L_2 = ...
```

```

theta_L_3 = ...
theta_L_4 = ...
print('Situation 1', theta_L_1)
print('Situation 2', theta_L_2)
print('Situation 3', theta_L_3)
print('Situation 4', theta_L_4)

```

(c) Competitor degree of saturation

What is the degree of saturation with respect to the competitor C in #1, #2, #3 and #4?

```

## Your task: Calculate the degree of saturation for each set of parameters ##
## Note: Now you are calculating it for the competitor!
theta_C_1 = ...
theta_C_2 = ...
theta_C_3 = ...
theta_C_4 = ...

## Prints the results so we can analyze them.
print('Situation 1', theta_C_1)
print('Situation 2', theta_C_2)
print('Situation 3', theta_C_3)
print('Situation 4', theta_C_4)

```

(d) Fraction of $[P_{\text{free}}]$

What is the fraction of $[P_{\text{free}}]$ in #1, #2, #3 and #4?



Tip

Consider how to express the fraction of $[P_{\text{free}}]$ in terms of θ_{L_X} and θ_{C_X} .

```

## Your task: Calculate the P_free.
## Hint: Do not use the function from before - figure out another way.
theta_free_1 = ...
theta_free_2 = ...
theta_free_3 = ...
theta_free_4 = ...

## Prints the results so we can analyze them.
print('Situation 1', theta_free_1)
print('Situation 2', theta_free_2)
print('Situation 3', theta_free_3)
print('Situation 4', theta_free_4)

```


(e) Qualitative analysis

Describe in your own words why these four competitive situations end up with their respective binding patterns. Consider the relative concentrations and affinities of ligands L and C .

7 Difference between Q and K_{eq}

```
import matplotlib.pyplot as plt
import pandas as pd
from fysisk_biokemi.widgets import DataUploader
from IPython.display import display
pd.set_option('display.max_rows', 6)
```

Consider the reaction:



The time course of the reaction was followed monitoring formation of the product B . The starting concentration of A was 50 μM , and as you will learn later in the course, the reversible reaction going from A to B follows first order kinetics.

(a) Load & convert

The data is contained in the `diff_q_keq_data.xlsx` file.

```
uploader = DataUploader()
uploader.display()
```

Run the next cell **after** uploading the file

```
df = uploader.get_dataframe()
display(df)
```

Convert the measured concentrations of B , $[B]$, to concentrations in the SI-unit M (mol/L). Repeat for the starting concentration of A , $[A_0]$.

```
## Your task: Convert the concentration of B to M and set in new column ##
df['[B]_(M)'] = ...

## Your task: Set the initial concentration of A, in the variable A0.
## Remember to convert to M.
A0 = ...
```

(b) Law of mass balance

Use the laws of mass balance to calculate $[A]$ as a function of time in the unit M, add it as a column to the DataFrame

```
# Your task: Calculate the concentration of A for each time-point
## Add it as a column to the dataframe called '[A]_(M)'.
... # Your code here.
```

Make a plot of the time vs. the concentration of A and of time versus the concentration of B .

```
fig, ax = plt.subplots()
## Your task: Plot time vs. concentrations. ##
ax.plot(..., ..., label='[A]') # Time vs. concentration of A
ax.plot(..., ..., label='[B]') # Time vs. concentration of B

## This shows the labels. ##
ax.legend()
```

(c) Mass action ratio

Calculate and plot the mass action ratio Q as a function of time.

```
## Your task: Calculate the mass action ratio
Q = ... # calculate Q
```

Now plot the mass action ratio versus time.

```
fig, ax = plt.subplots()

## Your task: Make a plot of the axis from the dataframe df['Time_(min)'] vs Q
...
```

(d) Q vs K_{eq}

What is the difference between Q and K_{eq} ?

(e) Favoured compound

Which of the two compounds A and B is favored at equilibrium? (Favored: highest concentration)

(f) Equilibrium constant

What is the equilibrium constant of this reaction?

8 Determination of ΔH° for a reaction from the van't Hoff plot.

```
import matplotlib.pyplot as plt
from scipy.optimize import curve_fit
import numpy as np
from fysisk_biokemi.widgets import DataUploader
from IPython.display import display
```

The equilibrium constant for a reversible reaction going from A to B was measured as a function of temperature.

The data obtained is given in the Excel document `deter_delta_h_data.xlsx` - load the data with the widget

```
uploader = DataUploader()
uploader.display()
```

Run the next cell **after** uploading the file

```
df = uploader.get_dataframe()
display(df)
```

(a) Transform & plot the data

💡 Tip

In NumPy the `np.log` function calculates the natural logarithm that we often write as $\ln$ and `np.log10` calculates the base 10 logarithm.

Add new columns to the DataFrame containing $\ln(K_{eq})$ and $1/T$ and make a plot with $1/T$ on the x-axis and $\ln(K_{eq})$ on the y-axis.

```
## Your task: Add a column containing 1/T and one containing ln(Keq) ##
df['1/T'] = ...
df['ln_Keq'] = ...
```

Now you can make the plot in the cell below

```
fig, ax = plt.subplots()

## Your task: Make a plot of 1/T vs ln(Keq)
...

## EXTRA: Customization you don't need to edit or understand this
## It adds axis labels to the plot you made.
ax.set_xlabel(r'1/T [K]')
ax.set_ylabel(r'$\ln(K_{eq})$');
```

(b) Fit trendline

Make a linear trendline by fitting a linear function to the data.

Start by defining a linear function

```
def vant_hoff(T, a, b):
    ## Your task: Implement a linear function
    result = ...
    return result
```

Now we can use regression to find the parameters

```
## Your task: Make a fit with curve_fit to find the parameters ##
fitted_parameters, trash = ...
a_fit, b_fit = fitted_parameters

# Print
```

```
print(a_fit)
print(b_fit)
```

Then make a plot with the trendline added

```
fig, ax = plt.subplots()

## Your task: Choose points to evaluate the fit
## Look at the x-axis above and estimate a value for the minimum and maximum.
## Then calculate the fit at those points
max_x = ...
min_x = ...
T_trend = np.array([min_x, max_x]) # Select or make some appropriate points for the
plotting evaluating the trendline.
y_fit = vant_hoff(T_trend, ..., ...)

## Your task: Plot the fit
...

## Plots the data
ax.plot(df['1/T'], df['ln(Keq)'], 'o')

## EXTRA: You do not need to edit or understand this.
## It adds axis labels to the plot you made.
ax.set_xlabel('1/T [K]')
ax.set_ylabel(r'$\ln(K_{eq})$');
```

(c) Reaction type

Calculate the reaction enthalpy and entropy, at $T = 298$ K, assuming that $R = 8.314472 \times 10^{-3} \frac{\text{kJ}}{\text{mol}\cdot\text{K}}$. Is the reaction endo- or exothermic?

```
## Your task: Set known values and add units as comments e.g. # kJ/(mol K) ##
R = ...
T = ...

## Your task: Calculate  $\Delta H$  and  $\Delta S$  ##
## Consider the units!
dH = ...
dS = ...

print(dH)
print(dS)
```

Tip

The units of a slope is the units of the y-axis divided by the units of the x-axis.

In the van't Hoff plot the y-axis is unitless and the x-axis is in 1/K.

(d) Free energy change

Calculate the free energy change, ΔG° , at $T = 298 \text{ K}$, assuming that $R = 8.314472 \times 10^{-3} \frac{\text{kJ}}{\text{mol}\cdot\text{K}}$

```
## Your task: Calculate  $\Delta G$ 
dG = ...


print(dG)
```

9 ATP hydrolysis

```
import numpy as np
```

Below is shown the structure of ATP.

ΔG° for the hydrolysis of ATP to ADP and P_i is -30.5 kJ/mol .

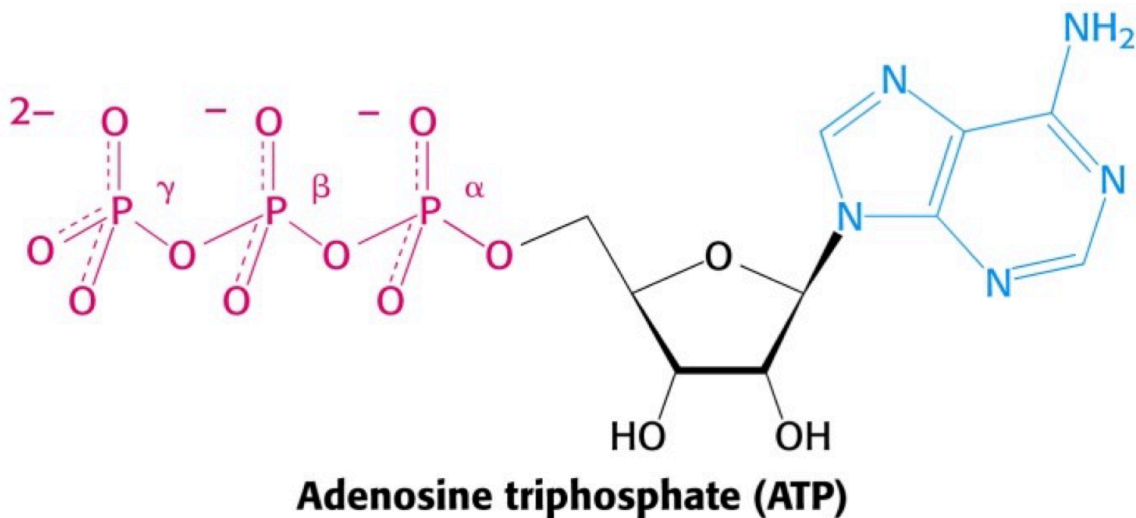

(a) ΔG

In cells at 298 K the steady state concentrations of ATP, ADP og P_i resulted in a value for the reaction quotient $Q = \frac{[\text{ADP}][\text{P}_i]}{[\text{ATP}]} = 0.002$. Calculate $\Delta G'$ under these conditions.

```
## Your task: Define known values
## Add units as comments! E.g. # kJ / mol
dG_std = ... # kJ / mol
Q = ...
T = ...
... # One more might be useful.

## Your task: Calculate dG
```

```
dG = dG_std + R*T*np.log(Q)
print(dG)
```

(b) Equilibrium or not?

Assuming that the temperature within these cells is 298 K, are these cells in equilibrium with respect to the hydrolysis of ATP?

```
## Your task: Calculate K_eq.
...
```

(c) ATP synthesized

Calculate the number of moles of ATP synthesized by a resting person in a period of 24 hours, assuming that the energy consumption by this person is 8368 kJ per 24 hours and that 40% of this energy is converted directly into ATP without loss of energy. Use the $\Delta G'$ value calculated in question a, and assume that 298 K.

```
# Your task: Set the known value of the energy spent for ATP.
energy_atp = ...

# Your task: Calculate the number of moles of ATP synthesized
synth_atp = ...
print(synth_atp)
```



Tip

You can use `np.absolute` to calculate the absolute value of a number.

(d) Turnover

Next, calculate the average number of times each ATP molecule is turned over (synthesis followed by hydrolysis) in 24 hours when the total amount of ATP in the body equals 0.2 mol.

```
## Your task: Set the known total_atp value
## Remember unit
...

## Your task: Calculate the turnover number.
... # Your calculation here

## Your task: Print the calculated turnover number.
```