Visualization of Guam Coconut Rhinoceros Beetle Trap Data

Aubrey Moore

May 4, 2016

Notes

- Best viewed in with a PDF reader in presentation mode.
- This document was generated by an IPython Notebook.
- Data required:
    - a CSV table containing 3 fields: trap identifier and lat/long coordinates in decimal degrees
    - a CSV table containing 4 fields: trap identifier, dates for start and end of trapping period, and number of beetles trapped during the trapping period
    - a CSV table containing 2 fields: lat/long coordinates in decimal degrees defining a mask for the region of interest
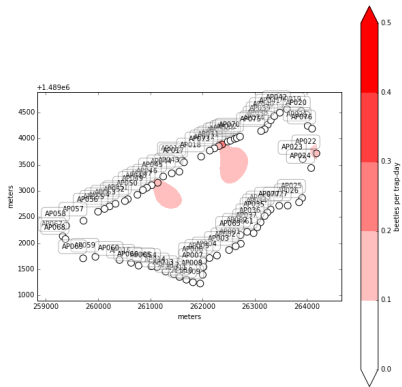
Mean beetles per trap-day for 90 day period ending
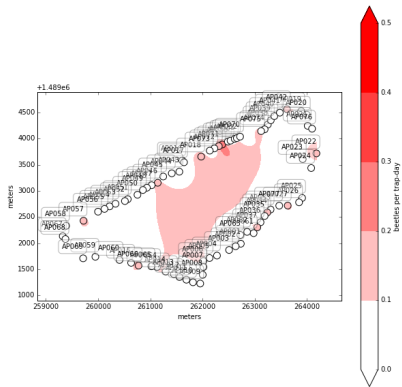## 01 Jul 2015
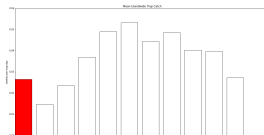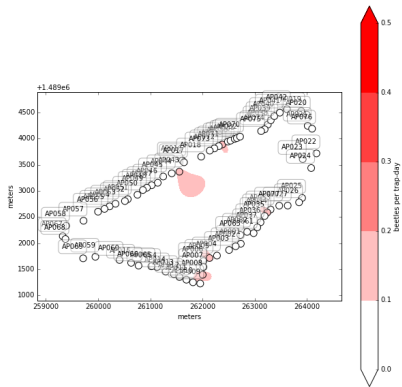
# Mean beetles per trap-day for 90 day period ending
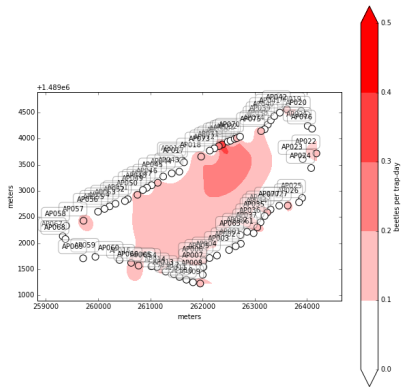## 01 Aug 2015
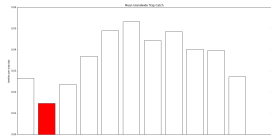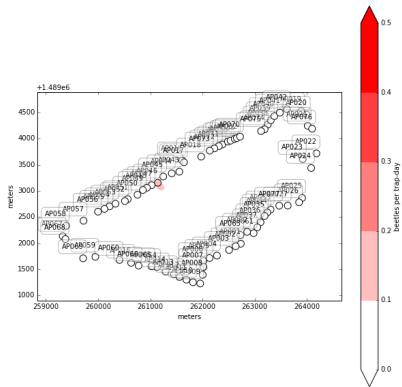
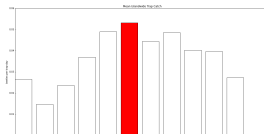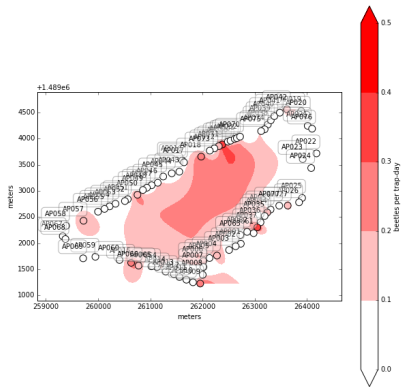# Mean beetles per trap-day for 90 day period ending
01 Sep 2015

Mean beetles per trap-day for 90 day period ending
01 Oct 2015

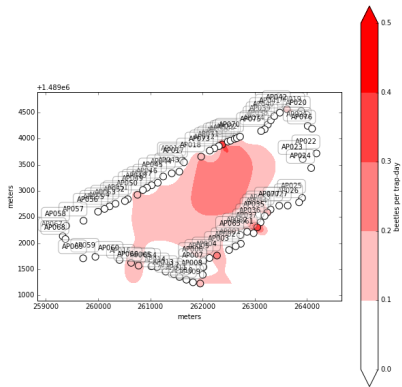# Mean beetles per trap-day for 90 day period ending
01 Nov 2015

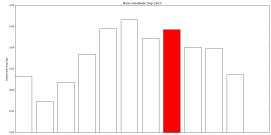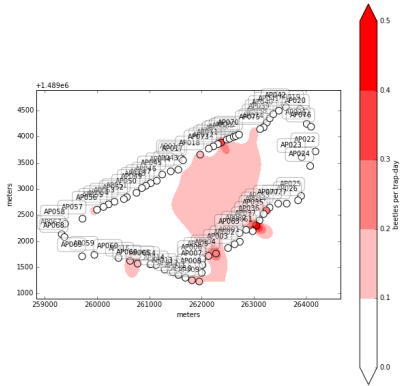# Mean beetles per trap-day for 90 day period ending
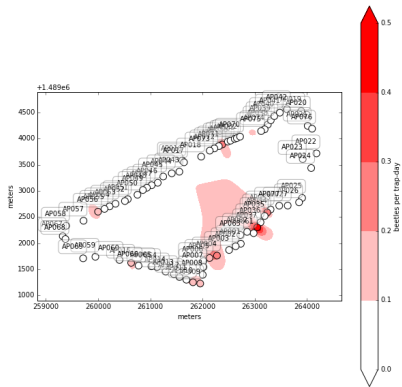**01 Dec 2015**

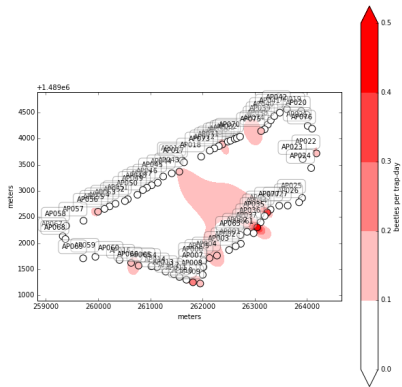# Mean beetles per trap-day for 90 day period ending 01 Jan 2016

Mean beetles per trap-day for 90 day period ending
01 Feb 2016

Mean beetles per trap-day for 90 day period ending
01 Mar 2016

Mean beetles per trap-day for 90 day period ending
01 Apr 2016

Mean beetles per trap-day for 90 day period ending
01 May 2016