


vbg_defense_orchestrator — pipeline map

How a raw feed becomes a triaged incident, and the one gate no automated path is allowed to skip on its way to remediation.

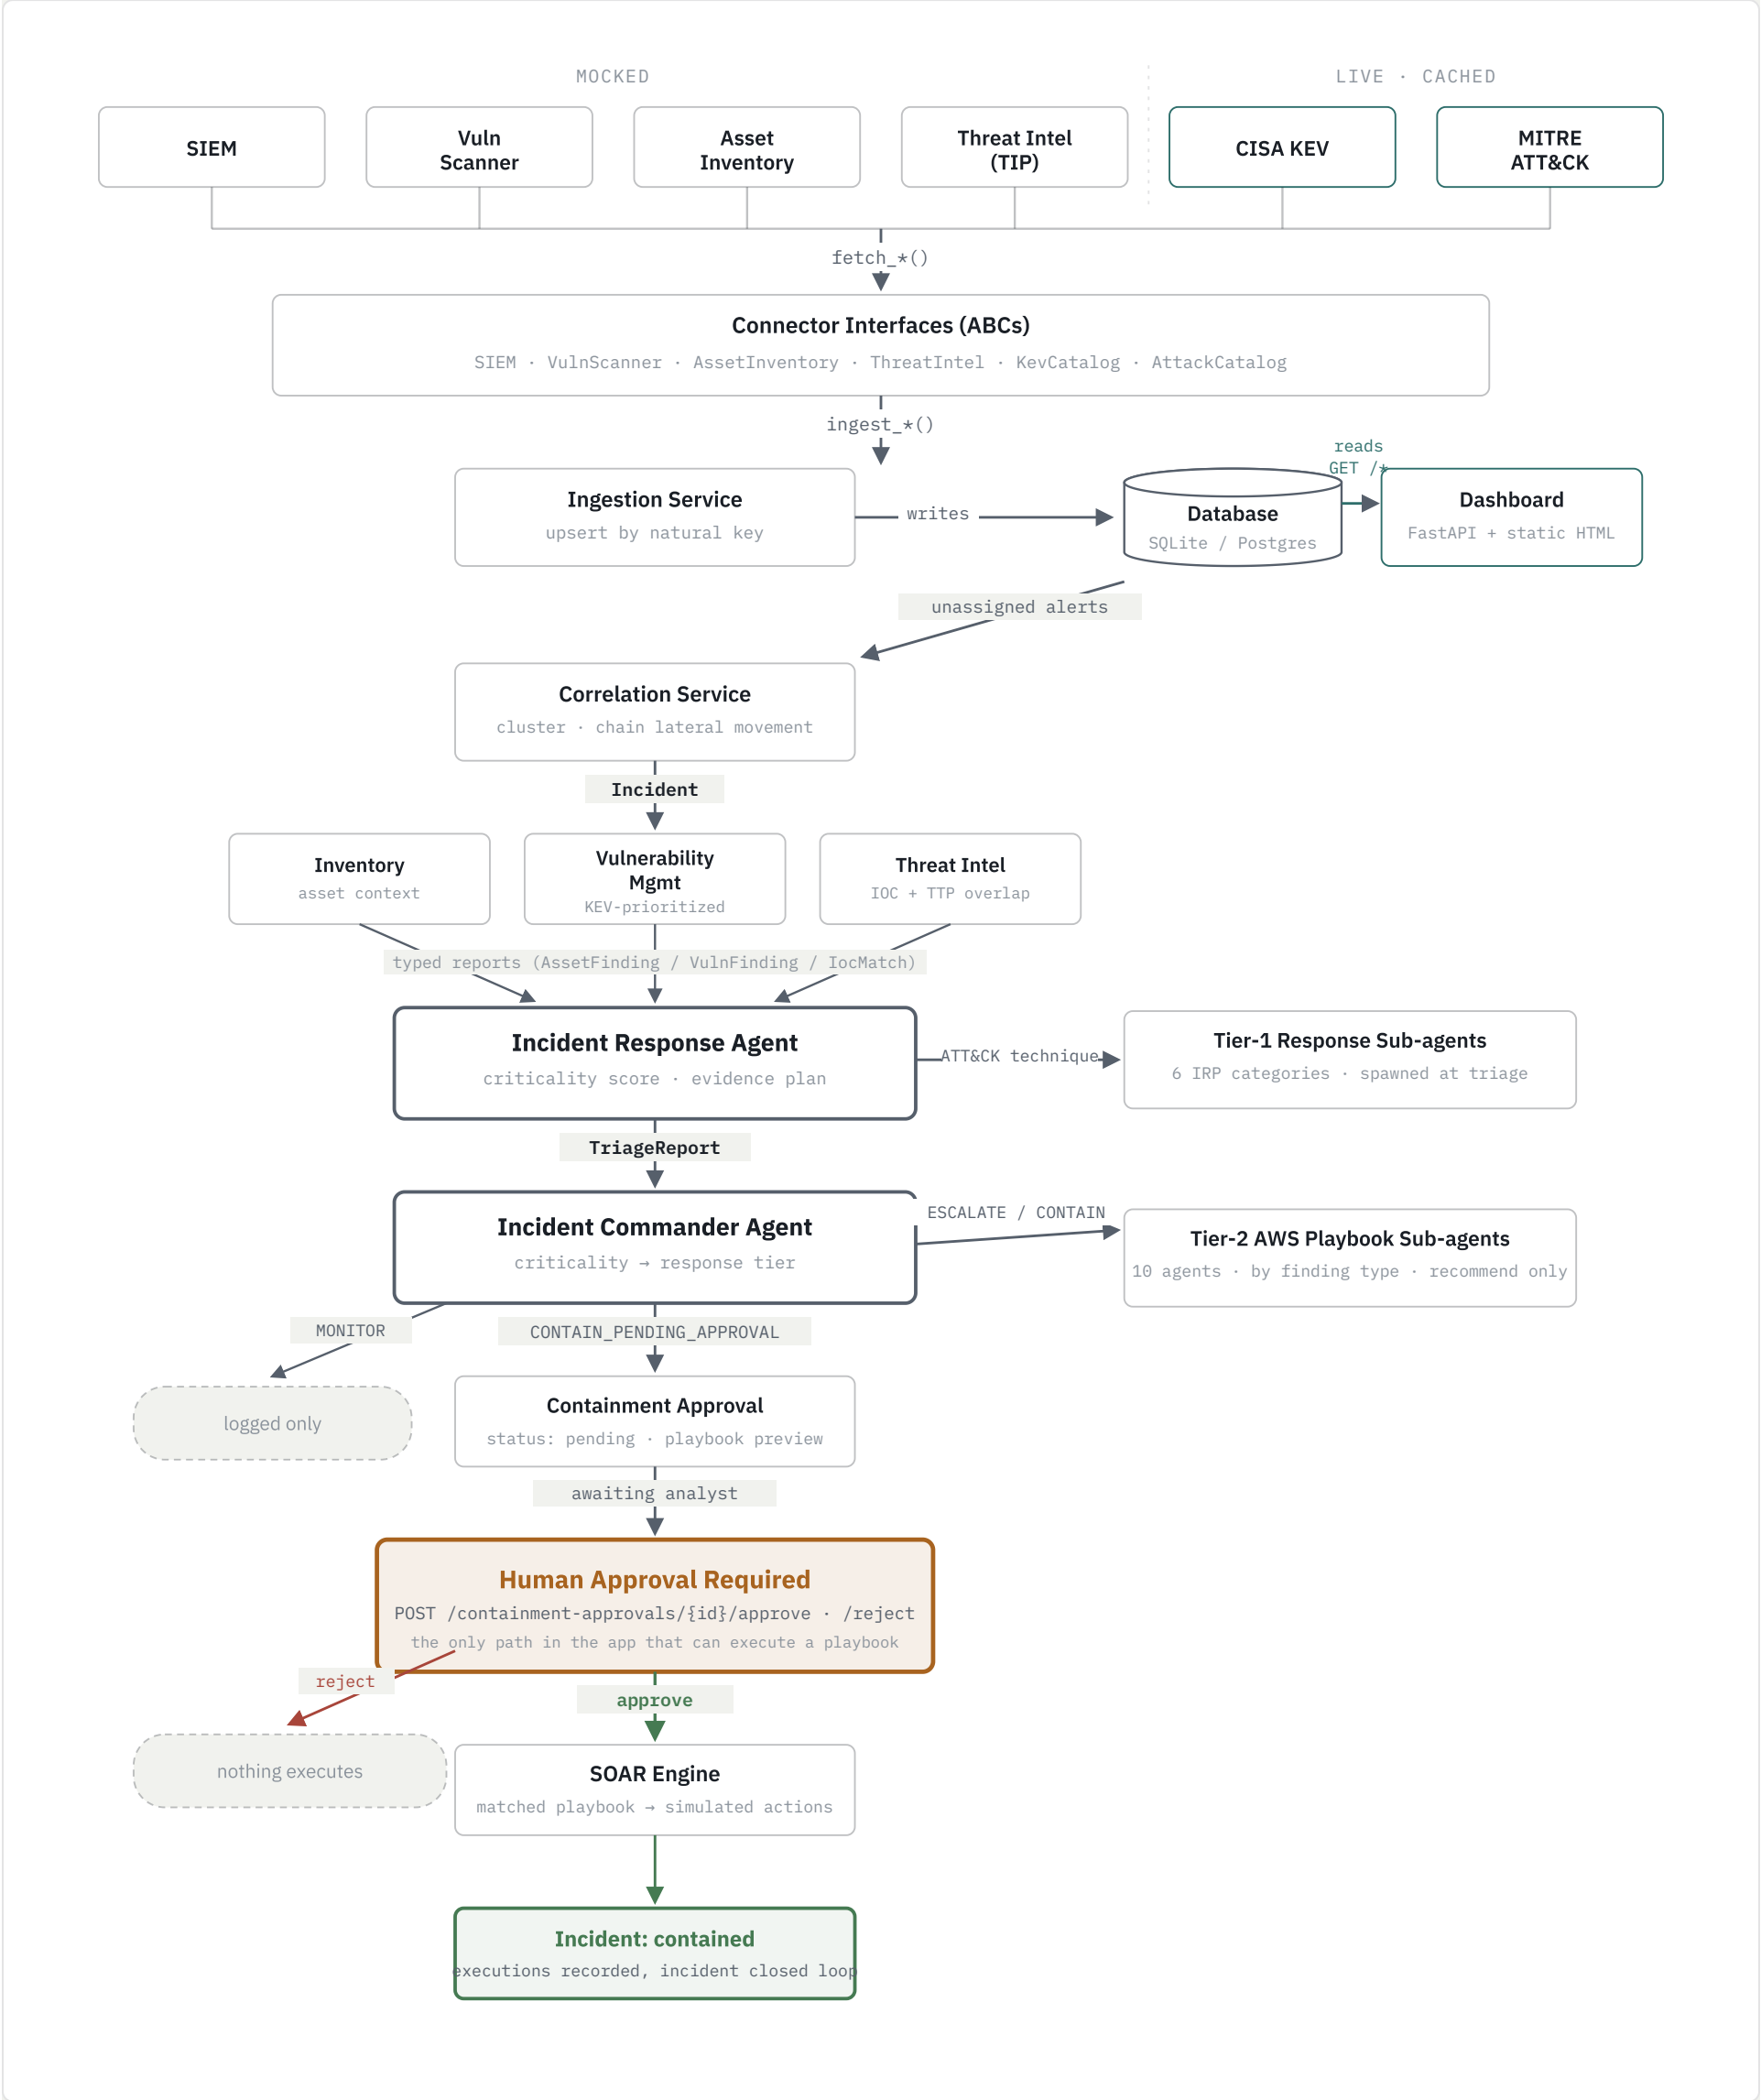

Every arrow above **Human Approval Required** is a recommendation — evidence plans, triage scores, spawned runbooks. Only two things happen after it: reject records the decision and stops, or approve hands the incident to the SOAR Engine. That gate is the only code path in the app that can execute a SOAR playbook.

☐ hub agent (thick border) ☒ human decision point ☐ terminal — nothing executes ☒ terminal — remediation applied

TWO CONNECTORS ARE LIVE

CISA KEY and MITRE ATT&CK fetch from public sources with a cached, stale-on-failure fallback (`_http_cache.py`). Everything else in the source row is mocked but implements the same interface — swapping one for a real product changes one file.

TWO DISPATCH TIERS, TWO TRIGGERS

Tier-1 spawns off the **IR Agent** at triage, keyed by ATT&CK technique ID. Tier-2 spawns off the **Commander's decision**, keyed by GuardDuty/CloudTrail finding type. Both only ever recommend.

THE GATE IS ABSOLUTE

`approval_service.approve_containment()` is the sole caller of `soar_engine.evaluate_and_execute()`. There is no criticality score, however high, that skips it.