PRAKTIKUM SISTEM OPERASI

MODUL 10

SHELL

Oleh:

Aulia Jasifa Br Ginting 2311104060

PROGRAM STUDI S1 REKAYASA PERANGKAT LUNAK

DIREKTORAT KAMPUS PURWOKERTO

UNIVERSITAS TELKOM

2026

JURNAL

1. Akan dimodifikasi shell dengan modifikasi syscall bernama chname yang berfungsi untuk mengubah nama suatu proses. Lihat kembali modul sebelumnya cara membuat syscall.
   Perhatikan sekarang syscall chname mempunyai 3 parameter yaitu pid, character dan panjang character. Character untuk menyimpan nama dan panjang character untuk panjang nama.
   a. Pada prototypes.h chname diubah menjadi:

```
extern  status  ascdate(uint32, char *);

/* in file bufinit.c */
extern  status  bufinit(void);

/* in file chprio.c */
extern  syscall chprio(pid32, pri16);

/* in file chname.c */
extern  pri16   chname(pid32, char *, uint32);

/* in file clkupdate.S */
extern  uint32  clkcount(void);
```

   b. Pada chname.c fungsi diubah dari:

```
// Nama: Aulia Jasifa Br Ginting
// NIM: 2311104060

#include <xinu.h>

/*------------------------------------------------------------------------
 *  chname  -  Dummy syscall
 *------------------------------------------------------------------------
 */
syscall chname(
        pid32           pid,
        char *          newname
)
```

menjadi

```
/* chname.c - chname */

// Nama: Aulia Jasifa Br Ginting
// NIM: 2311104060

#include <xinu.h>

/*------------------------------------------------------------------------
 *  chname  -  Dummy syscall
 *------------------------------------------------------------------------
 */
pri16 chname(
        pid32           pid,
        char            *newname,
        uint32          namelen
)
```

Modifikasi kode pada chname.c sehingga nama proses bisa diubah bila syscall tersebut dipanggil

```
 *------------------------------------------------------------------------
 */
pri16 chname(
        pid32           pid,
        char            *newname,
        uint32          namelen
)
{
        intmask mask;
        struct procent *prptr;
        uint32 i;

        mask = disable();

        /* Validasi PID*/
        if (isbadpid(pid)) {
                restore(mask);
                return SYSERR;
        }

        prptr = &proctab[pid];

        /* Nama baru*/
        for (i = 0; i < namelen && i < PNMLEN-1; i++) {
                prptr->prname[i] = newname[i];
        }

        /* Null terminator */
        prptr->prname[i] = '\0';

        restore(mask);
        return OK;
}
```

2. Buatlah perintah baru bernama namecmd sesuai dengan langkah-langkah pada no.5 pada modul shell!
   a. Edit shell.c

```
#include <xinu.h>
#include <stdio.h>
#include "shprototypes.h"

/************************************************************************/
/* Table of Xinu shell commands and the function associated with each   */
/************************************************************************/
const   struct  cmdent  cmdtab[] = {
        {"argecho",     xsh_argecho},
        {"arp",         xsh_arp},
        {"cat",         xsh_cat},
        {"clear",       xsh_clear},
        {"date",        xsh_date},
        {"devdump",     xsh_devdump},
        {"echo",        xsh_echo},
        {"help",        xsh_help},
        {"ls"   ,       xsh_ls},
        {"kill",        xsh_kill},
        {"memdump",     xsh_memdump},
        {"memstat",     xsh_memstat},
        {"ns",          xsh_ns},
        {"netinfo",     xsh_netinfo},
        {"ping",        xsh_ping},
        {"ps",          xsh_ps},
        {"sleep",       xsh_sleep},
        {"tee",         xsh_tee},
        {"udp",         xsh_udpdump},
        {"udpecho",     xsh_udpecho},
        {"udpeserver",  xsh_udpeserver},
        {"uptime",      xsh_uptime},
        {"namecmd",     xsh_namecmd},
        {"mycmd",       xsh_mycmd},
        {"?",           xsh_help}
```

   b. Edit shprototypes.h

```
/* in file xsh_namecmd.c */
extern  shellcmd  xsh_namecmd   (int32, char *[]);
```

c. Buat file baru:

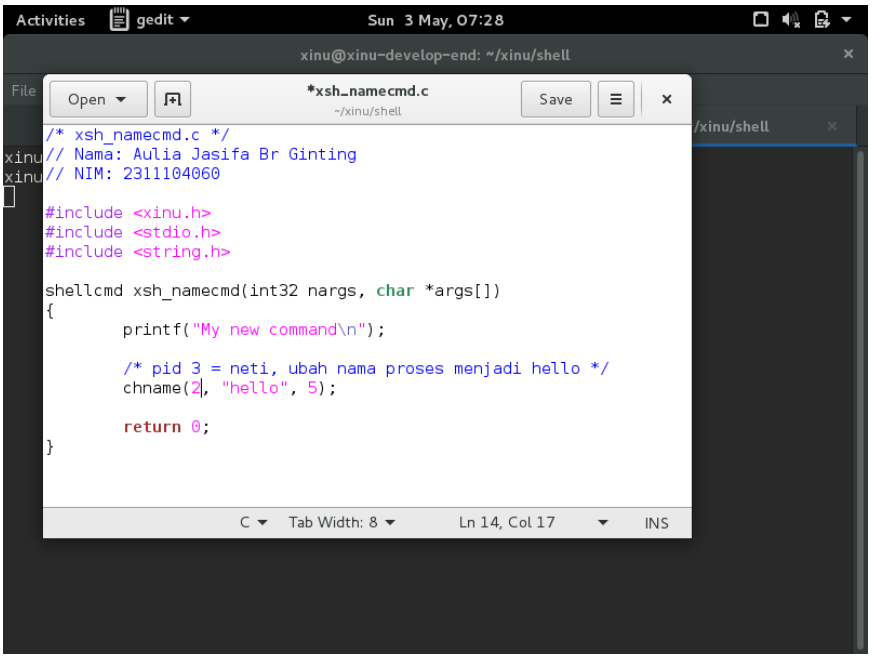

3. Test hasilnya:
   a. Masuk ke terminal xinu
   b. Jalankan perintah ps

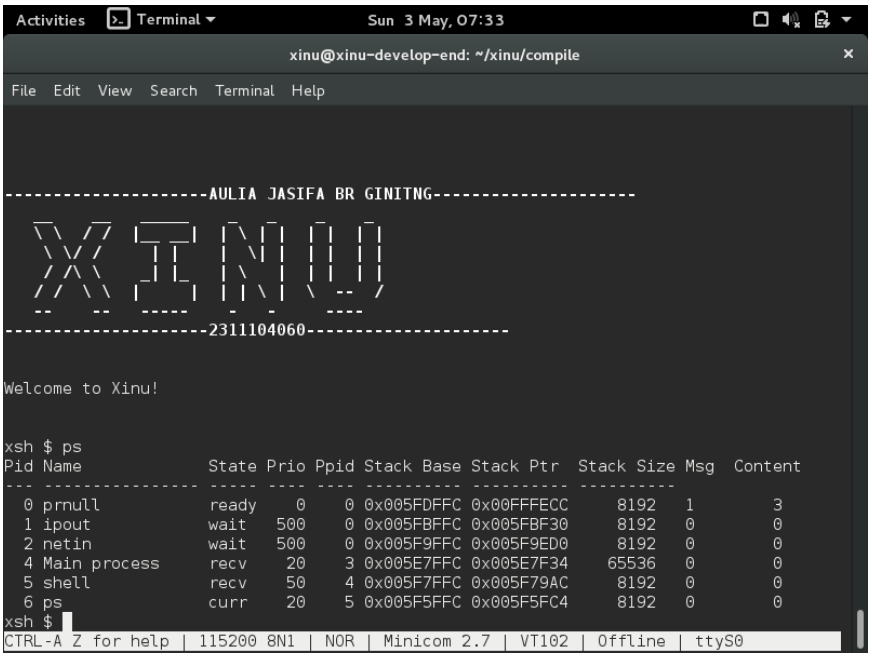

c. Jalankan perintah namecmd

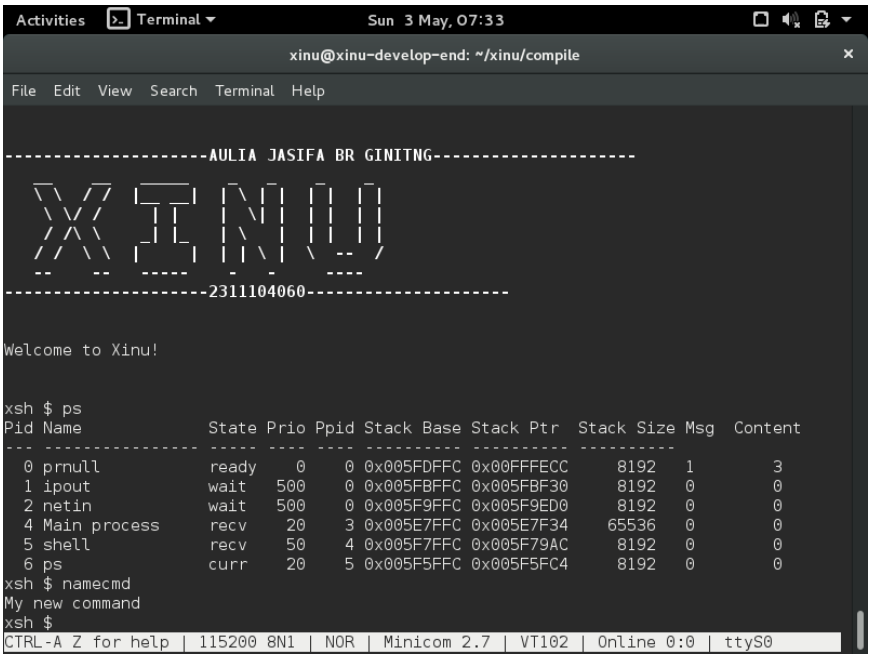

d. Jalankan perintah ps

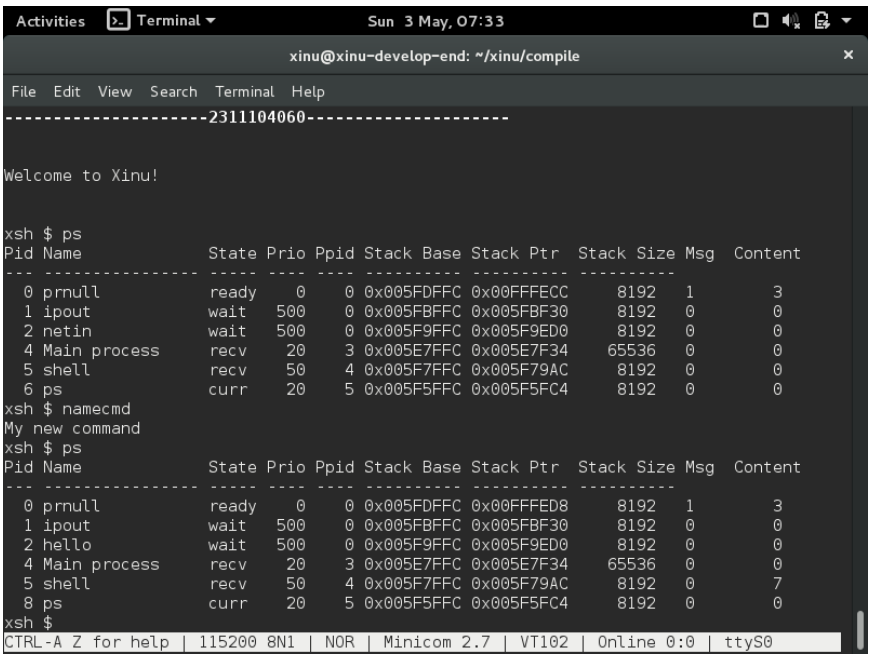

e. Lihat nama proses telah berubah

Nama proses berubah dari *netin* menjadi *hello* karena syscall chname() berhasil dijalankan melalui command namecmd.