

AuthentiScan Pro

Verification Widget

Embeddable Credibility Badge — Integration Guide

Version 1.0 | July 2026 | Confidential

www.authentiscanapp.com

Document Information

Project	AuthentiScan Pro — Verification Widget
Live Endpoint	app.authentiscanapp.com/api/widget
Widget Script	app.authentiscanapp.com/widget.js
Document Type	Widget Integration & Technical Documentation
Version	1.0
Date	July 2026
Prepared by	AuthentiScan Pro Development Team
Purpose	Technical and integration documentation for the embeddable AuthentiScan Pro verification widget used by partner websites.

1. Overview

The AuthentiScan Pro Verification Widget is an embeddable credibility badge that any partner website can add to its pages with two lines of code. It displays an AuthentiScan credibility assessment — a risk score, a verdict, and a breakdown of key signals — for a given piece of content, directly inside the partner's page.

The widget is designed for trust and integrity. In its recommended configuration, the partner site supplies only the URL to be verified; the credibility score is fetched directly from the AuthentiScan API at render time. The partner never supplies, computes, or can alter the score, ensuring the badge remains an authoritative, tamper-proof indicator of credibility.

The widget is fully self-contained and renders inside a Shadow DOM, so it is completely isolated from the host page's styling and cannot be affected by — or interfere with — the partner site's own CSS or JavaScript.

i The widget reuses the same analysis pipeline as the main AuthentiScan Pro application (Claude AI with real-time web search). The score shown in the badge is identical to the score a user would obtain by submitting the same URL in the app.


The Daily Ledger

World Health Politics Tech

HEALTH · FACT CHECK

Health officials respond to viral claim that a new vaccine contains tracking microchips


By Jane Coteau · Updated July 7, 2026 · 4 min read

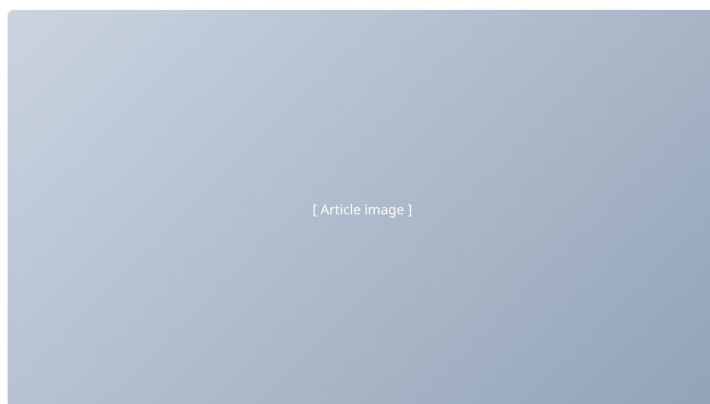

A widely shared social post prompted responses from public health agencies this week.

A claim circulating on social media this week alleged that a newly approved vaccine contains microchips capable of tracking recipients. The post, shared tens of thousands of times, offered

CREDIBILITY CHECK

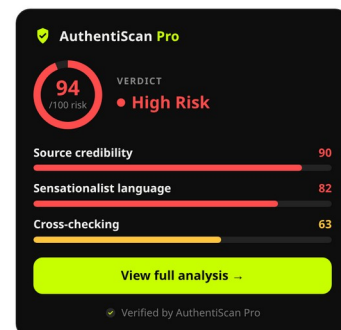

MORE IN HEALTH

What regulators actually review before approval

How to spot a manipulated screenshot

A short guide to reading primary sources

Figure 1: The AuthentiScan Pro widget embedded in a partner news article, showing a credibility assessment alongside the content.

2. How It Works

When a page containing the widget loads, the widget script locates each widget container, reads the URL to verify, and requests an assessment from the AuthentiScan widget endpoint. The endpoint reuses the core analysis pipeline and returns a compact, badge-ready result, which the widget renders in place.

Request Flow

```
[ Partner website page ]
    |
    v
[ widget.js (Shadow DOM badge) ]
    |   GET /api/widget?url=<content-url>
    v
[ AuthentiScan Widget API (/api/widget) ]
    |   (cache check -> Supabase widget_cache)
    v
[ Core Analysis API (/api/analyze) ]
    |
    v
[ Claude AI (web search enabled) ]
    |
    v
[ Credibility result: score + verdict + signals ]
    |
    v
[ Badge rendered inside the partner page ]
```

On the first request for a given URL, the endpoint performs a full analysis (typically 10–20 seconds due to live web search) and stores the result in a 24-hour cache. Subsequent views of the same URL are served instantly from cache, so a widget on a popular page does not re-analyze on every visit.

3. Integration

3.1 Dynamic Mode (Recommended)

The partner passes only the URL to be verified. The widget fetches the authoritative score from AuthentiScan on load. This is the configuration that should be used in production.

```
<div class="authentiscan-widget"
  data-url="https://example.com/article"></div>
```

```
<script src="https://app.authentiscanapp.com/widget.js" async></script>
```

i Because the score is fetched from AuthentiScan and not supplied by the host page, it cannot be faked by the partner. This is what makes the badge trustworthy.

3.2 Static Mode (Preview / Offline Only)

If a result is already known and only a visual render is required (for example, a design preview), values may be passed directly. This mode is not intended for production trust badges, since the displayed score is controlled by the host page.

```
<div class="authentiscan-widget"
  data-score="92"
  data-signals='[{"label":"Source","value":90},
                {"label":"Language","value":74},
                {"label":"Images","value":58}]'
  data-url="https://example.com/article"></div>
```

```
<script src="https://app.authentiscanapp.com/widget.js" async></script>
```

3.3 Programmatic Rendering

The widget also exposes a JavaScript API for rendering into a specific element after the script has loaded.

```
<div id="my-badge"></div>
<script src="https://app.authentiscanapp.com/widget.js"></script>
<script>
  AuthentiScan.render("#my-badge", {
    url: "https://example.com/article"
  });
</script>
```

4. Widget Anatomy

The rendered badge is compact (maximum width 320px) and uses a dark theme. It presents the following elements:

- Brand identity — the AuthentiScan Pro shield and wordmark.
- Risk score — a circular gauge showing a value from 0 to 100 (higher = higher risk).
- Verdict — a labelled classification, colour-coded to the score.
- Signal bars — up to three key credibility signals, each with a labelled bar.
- Full analysis link — 'View full analysis', linking to app.authentiscanapp.com.
- Verification footer — 'Verified by AuthentiScan Pro'.

Verdict Classification

Risk Score	Verdict	Colour
------------	---------	--------

66 – 100	High Risk	Red
33 – 65	Verify	Yellow
0 – 32	Trustworthy	Green

The badge renders in one of three colour states according to the risk score:

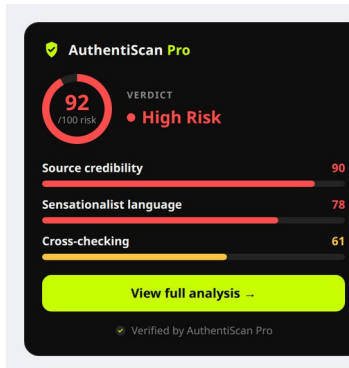


Figure 2: High Risk

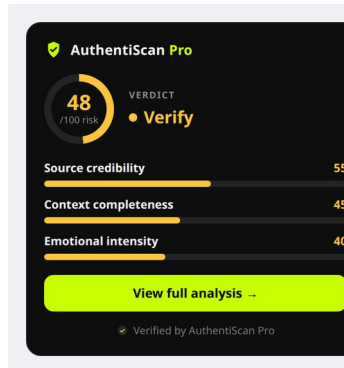


Figure 3: Verify

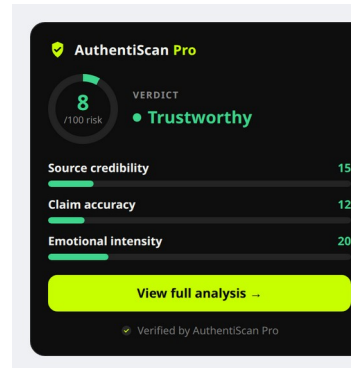


Figure 4: Trustworthy

i While it is fetching, the badge shows an 'Analyzing credibility...' state; if the analysis cannot be completed, it shows a neutral error state rather than a misleading score.

5. Widget API Endpoint

The widget endpoint is a public, CORS-enabled route that accepts a URL and returns a compact credibility assessment.

Request

```
GET /api/widget?url=https://example.com/article
POST /api/widget { "url": "https://example.com/article" }
```

Response

```
{
  "score": 5,
  "verdict": "Highly Credible News Source",
  "signals": [
    { "label": "Claim Accuracy", "value": 22, "level": "safe" },
    { "label": "Source Credibility", "value": 22, "level": "safe" },
    { "label": "Emotional Intensity", "value": 22, "level": "safe" }
  ],
  "explanation": "Reuters.com is a highly trusted ...",
  "url": "https://www.reuters.com",
  "cached": false
}
```

Response Fields

Field	Type	Description
score	number	Risk score from 0 (trustworthy) to 100 (high risk).
verdict	string	Human-readable classification from the analysis.
signals	array	Up to three key signals, each with label, value and level.
explanation	string	Short natural-language summary of the finding.
url	string	The URL that was analysed.
cached	boolean	Whether the result was served from the 24h cache.

6. Configuration Reference

Container Attributes

Attribute	Required	Description
data-url	Dynamic mode	URL to verify. The widget fetches its score from the API.
data-score	Static mode	Pre-computed risk score (0–100). Preview use only.
data-signals	Optional	JSON array of signals for static mode.
class="authentiscan-widget"	Yes	Marks the element for automatic rendering.

Environment Variables (Server)

Variable	Description
SUPABASE_URL	Supabase project URL (enables result caching).
SUPABASE_SERVICE_KEY	Supabase service key (server-side, bypasses RLS).
AUTHENTISCAN_BASE_URL	Optional override for the internal analysis base URL.

7. Deployment & Caching

The widget endpoint caches each URL's result for 24 hours to control cost and latency. Caching is optional — the endpoint operates without it, re-analysing on each request — but it is strongly recommended for production. The cache is stored in a Supabase table:

```
create table if not exists public.widget_cache (  
  url          text primary key,  
  payload      jsonb not null,  
  created_at   timestampz default now()  
);  
alter table public.widget_cache enable row level security;
```

i No row-level security policy is required: the endpoint uses the Supabase service key, which bypasses RLS. With RLS enabled and no policy, the cache is inaccessible to anonymous keys.

8. Full-Analysis Deep-Link

The badge's 'View full analysis' action links to the AuthentiScan application with the verified URL as a query parameter:

```
https://app.authentiscanapp.com/?url=<content-url>
```

The application reads this parameter on load, opens directly on the analysis screen, pre-fills the URL, and runs the analysis automatically — providing a seamless transition from the in-page badge to the full AuthentiScan report.

9. Source Code Repository

The widget, its API endpoint, and the demonstration pages are maintained in the main AuthentiScan Pro repository.

Repository	https://github.com/authentiscanapp/app_v1
Widget script	public/widget.js
Widget endpoint	api/widget.js
Documentation demo	public/widget-demo.html
Example integration	public/widget-example-article.html

10. Conclusion

The AuthentiScan Pro Verification Widget extends the platform's credibility analysis beyond the main application and into partner websites, presenting an authoritative, tamper-proof credibility badge that can be integrated with two lines of code. By fetching scores directly from the AuthentiScan API, isolating itself with Shadow DOM, and caching results for efficiency, the widget provides a lightweight yet trustworthy distribution channel for AuthentiScan credibility assessments.