WhatsApp API Setup Documentation

TABLE OF CONTENTS

1 INTRODUCTION 3

1.1 Overview of WhatsApp API

1.2 Webhook Setup (/api/v1/meta/webhook)

2 API REFERENCES 3

2.1 API Key 3

2.2 Send message 3

2.2.1 *API endpoint 3*

2.3 Inbound Messages

Handled via Webhook 5

2.4 Template API Endpoints 7

- GET /{version}/{wabaId}/message_templates – Get Template
- POST /{version}/{wabaId}/message_templates – Create Template
- DELETE /{version}/{wabaId}/message_templates – Delete Template
- GET /{version}/{wabaId}/message_templates/{templateId} – Get Template by ID
- POST /{version}/{templateId} – Edit Template

2.5 Additional API

1 INTRODUCTION

The **WhatsApp API** enables businesses to manage and automate customer communication through a set of secure, scalable endpoints. It supports essential capabilities such as configuring API authentication, setting up webhooks for inbound message handling, sending conversation messages, and managing message templates used across campaigns.

Additionally, the API provides endpoints to create, edit, retrieve, and delete message templates, allowing full lifecycle management of communication assets. Throughout this document, sample requests, responses, and references to official Meta documentation are provided to guide developers in implementing and maintaining their WhatsApp integrations.

2 API REFERENCES

2.1 API Key

To use the APIs, an API Key is required. Follow these steps to get the API Key:

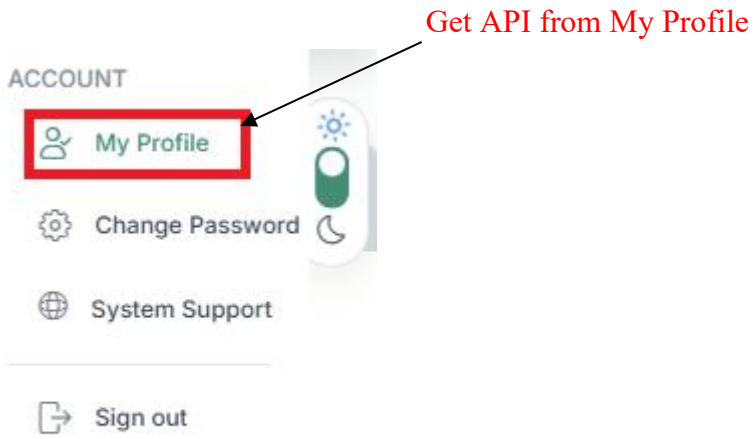

2.2 Send message

All message templates—regardless of type—are sent using the same endpoint, and the response format is consistent across all payloads. Only the payload structure varies depending on the template design and components (text, media, buttons, carousel cards, etc.).

Every Send Message API request must include:

- {version} — WhatsApp API version (v23.0)
- {phoneNumberId} — Registered WhatsApp phone number ID
- Recipient number
- Template name and language
- Template parameters (text, media IDs, button parameters, etc.)

- Media ID for templates containing images, videos, or documents

The endpoint URL for all the send message APIs is the same, and the response structure is also consistent. However, the payload structure can vary based on the types of templates.

Request URL: https://{{yourdomain.com}}/{{Version}}/{{phoneNumber_id}}messages
HTTP Method: POST

HTTP Headers

Sample

Key	**Value**
Versions	v23.**0**
Phone No. Id	XXXXXXXXXXXXX
X-API-KEY	db75b974-e403-XXXX-XXXX-XXXX

Request Body

The request payload will vary depending on the type of message template you're sending. Different templates require different data. You must follow the official Meta documentation for each template type:

Please refer the below meta document link for all Send message API:

https://developers.facebook.com/docs/whatsapp/cloud-api/guides/send-message-templates

Success Response:

Response body structure is the same for all types of templates. Gives the message ID if the request is accepted others gives the error details.

```
{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "91XXXXXXXXXX",
    "type": "template",
    "template": {
        "name": "test1234",
        "language": {
            "code": "en"
        },
        "components": [
            {
                "type": "body",
                "parameters": []
            }
        ]
    },
    "biz_opaque_callback_data": "{{BizOpaqueCallbackData}}"
}
```

Failure response:

A failure response will contain details about what went wrong with the request. For instance, if required parameters are missing, you will see an error like:


```
{
"isValid": false,
"response": [
{
"status": "Invalid phone number in template message.",
"message": "An unexpected error occurred.",
"statusCode": 500
}
```


2.3 Webhook Send Conversation messages

Inbound messages are delivered to the business through the Webhook URL configured in the WhatsApp API.

For the "Webhook" API, the user needs to include the below information in the request:

Request URL: https://yourdomain.com/api/v1/meta/webhook
HTTP Method: POST

HTTP Headers

Sample

Key	Value
Version	v23.0
X-API-KEY	db75b974-e403-XXXX-XXXX-XXXX

Request Body

Please refer the below meta document link for Webhook Request:

https://developers.facebook.com/docs/whatsapp/cloud-api/reference/media

Success Response:

Gives the Media ID if the request is accepted otherwise gives the error details.

```
POST /api/v1/meta/webhook
```

2.4 Send Conversation messages:

Reference: https://developers.facebook.com/docs/whatsapp/cloud-api/messages/text-messages

The webhook event includes essential information such as:

- Sender's WhatsApp number
- Message type (text, image, interactive, etc.)
- Timestamp
- Message ID
- Business phone number ID
- Metadata for template responses and button interactions

Businesses can process these inbound events to:

- Trigger automated responses
- Forward messages to agents or CRM systems
- Start conversation-based workflows

2.5 Template API Endpoints

Webhook - POST

curl -X POST
https://yourdomain.com/api/v1/meta/webhook

Create Template - POST
curl -X POST
https://yourdomain.com /{version}/{wabaId}/message_templates

Get Template – GET
curl -X GET
https://yourdomain.com /{version}/{wabaId}/message_templates

Delete Template - DELETE
curl -X DELETE
https://yourdomain.com/{version}/{wabaId}/message_templates

Get Template by Id - GET
curl -X GET
https://yourdomain.com/{version}/{templateId}

Edit Template - POST
curl -X POST
https://yourdomain.com/{version}/{templateId}

Send Whatsapp Message - POST
curl -X POST
https://yourdomain.com/{version}/{phoneNumberId}/messages

Sample Curl

1. Create Template

```
curl -X POST "https://yourdomain.com/v23.0/ {wabaId} /message_templates" \
 -H 'authorization: Bearer db75b974-e403-XXXX-XXXX-XXXX \
 -H 'content-type: application/json' \
 -d
```

```
        {
          "type": "BODY",
          "text": "offer is going on hurry up!!!offer is going on hurry up!!!offer is going on hurry up!!!"
        },
        {
          "type": "FOOTER",
          "text": "thank you welcome again"
        }
      ]
    },


    {
      "name": "order_confirmation1",
      "language": "en_US",
      "category": "utility",
      "parameter_format": "positional",
      "components": [
        {
          "type": "body",
          "text": "Hi {{1}}! Your order number is {{2}}. Thank you.",
          "example": {
            "body_text": [
              [
                "Pablo",
                "860198-230332"
              ]
            ]
          }
        }
      ]
    }
```


2. Get Template

```
curl -X GET "https://yourdomain.com/v23.0/{wabaId}/message_templates" \
 -H 'authorization: Bearer db75b974-e403-XXXX-XXXX-XXXX
```


```
{
  "data": [
    {
      "name": "test1234",
      "language": "en",
      "category": "UTILITY",
      "id": "865679666122280",
      "allow_category_change": false,
      "status": "APPROVED",
      "components": [
        {
          "type": "BODY",
          "text": "Hello customer your replacement order is confirmed with us we will keep you updated."
```

```
      }
    ]
  }'
```

3. Get template by Id

```
curl -X GET " https://yourdomain.com/v23.0/ XXXXXXXXXX /message_templates" \
 --header 'authorization: Bearer db75b974-e403-XXXX-XXXX-XXXX \
--header 'content-type: application/json' \
--data

{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "91XXXXXXXXXX",
    "type": "template",
    "template": {
        "name": "test1234",
        "language": {
            "code": "en"
        },
        "components": [
            {
                "type": "body",
                "parameters": []
            }
        ]
    },
    "biz_opaque_callback_data": "{{BizOpaqueCallbackData}}"
}
```

4. Webhook

```
curl -X POST "https://yourdomain.com/v23.0/meta/webhook " \
 -H 'authorization: Bearer db75b974-e403-XXXX-XXXX-XXXX '
```

5. Delete Template

```
curl -X DELETE "https://yourdomain.com/v23.0/{wabaId}/messages?x-api-key= db75b974-e403-XXXX-XXXX-
XXXX "
 --header 'authorization: Bearer db75b974-e403-XXXX-XXXX-XXXX \
--header 'content-type: application/json' \
--data

{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "918104102960",
    "type": "template",
    "template": {
        "name": "test1234",
```

```
            "language": {
                "code": "en"
            },
            "components": [
                {
                    "type": "body",
                    "parameters": []
                }
            ]
        },
```

6. Edit Template

curl -X POST "https://yourdomain.com/v23.0/ templateId" \
 -H 'authorization: Bearer db75b974-e403-XXXX-XXXX '


```
{
   "success": false,
   "error": {
      "message": "Unsupported post request. Object with ID ‘xxxxxxx’ does not exist, cannot be loaded due to missing permissions, or does not support this operation. Please read the Graph API documentation at https://developers.facebook.com/docs/graph-api",
      "type": "GraphMethodException",
      "code": 100,
      "error_subcode": 33,
      "fbtrace_id": "Atvx4Zpn8fzass_c8ivFl-b"
   }
},
```



```
{
        "name": "test25",
        "language": "en",
        "category": "MARKETING",
        "id": "2627749914275687",
        "allow_category_change": false,
        "status": "APPROVED",
        "components": [
           {
              "type": "BODY",
              "text": "🍕Pizzahut invites you to the get 70% offer on 2 Pizza🍕\nBUY ONE GET ONE PIZZA FREE\n\"WEDNESDAY OFFER\"\nT&C apply\nALL YOU CAN EAT"
           },
           {
              "type": "FOOTER",
              "text": "thank you"
           }
        ]
     }
```


7. Send WhatsApp Message

```
curl -X POST "https://yourdomain.com/v23.0/phonenumberId/messages" \
 --header 'authorization: Bearer db75b974-e403-XXXX-XXXX-XXXX' \
--header 'content-type: application/json' \
--data

'{
    "messaging_product": "whatsapp",
    "recipient_type": "individual",
    "to": "91XXXXXXXXXX",
    "type": "template",
    "template": {
        "name": "test1234",
        "language": {
            "code": "en"
        },
        "components": [
            {
                "type": "body",
                "parameters": []
            }
        ]
    },
    "biz_opaque_callback_data": "{{BizOpaqueCallbackData}}"
}'
```

✅ Steps to Call WhatsApp API from Postman

1. Open Postman → Click "New" → Select "HTTP Request"

2. Set Request Type → POST

3. Enter the API URL → https://yourdomain.com/{version}/messages_templates

4. Go to → "Headers" tab →
   - Add these two headers:
   - Key Value
   - Authorization Bearer YOUR_ACCESS_TOKEN
   - Content-Type application/json

5. Go to → "Body" tab → raw - JSON
   - {
   - "messaging_product": "whatsapp",
   - "to": "RECIPIENT_PHONE_NUMBER",
   - "type": "text",
   - "text": {
   - "body": "Hello from Postman!"
   - }
   - }

6. Click → “Send”

2.5 Additional API

2.5.1 Get Wallet Balance

API :- Get /api/v1/user/balance

```
curl -X GET "  'https://alots.io/api/v1/user/balance' \
  --header 'authorization: Bearer 73095d93-e4f2-40f9-9566-7f61eb94166f'
```

Response Status: 200

```
{
  "walletBalance": 83.2649
}
```

2.5.2 Upload WhatsApp Media

API :- **POST** /{version}/{phoneNumberId}/media

```
curl -X POST "https://alots.io/v23.0/887202144474173/media" \
 -H 'authorization: Bearer 73095d93-e4f2-40f9-9566-7f61eb94166f' \
 -F "file=@choco-volcano-single.jpg
```

Response Status: 200

```
{
     "id": "2171225710283963",
      "error": null
}
```