
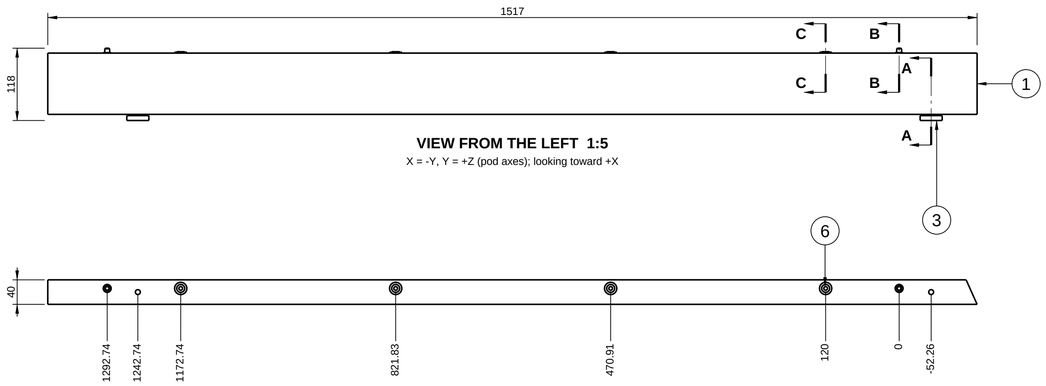


VIEW FROM THE LEFT 1:5

X = -Y, Y = +Z (pod axes); looking toward +X


VIEW FROM ABOVE 1:5

X = -Y, Y = +X (pod axes); looking down (toward -Z)

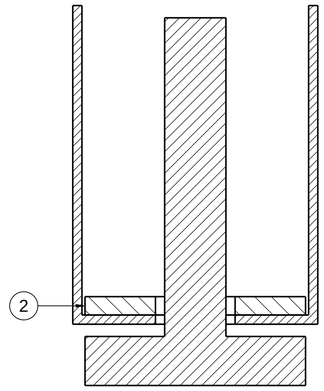


SECTION A-A 2:1

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION B-B 2:1

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION C-C 2:1

X = +X, Y = +Z (pod axes); looking toward +Y

PARTS LIST: 110101 BASE - BAND ASSY - SIDE - LH

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	111101	BASE - BAND TUBE - SIDE - LH	1	aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 (PM ruling; alloy: assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
2	111601	BASE - GLIDE DOUBLER - COMMON	2	aluminium sheet EN AW-5754 H22, 3 mm thick (assumption)	mill finish (hidden inside the band, D-79)
3	118002	BASE - LEVELLING GLIDE - M10 - HOLD	2	levelling glide, M10 stem with a 5 mm hex socket on top, about 36 mm pad; base 6.5 mm or taller, so that screwed fully home against the M10 rivnut's head it holds the band at 8.5 mm: a hard stop (product HOLD)	-
4	831001	HARDWARE - LOCATING SPIGOT - M6 X Ø8 - STAINLESS	2	stainless steel A2 round bar, turned, M6 stud (assumption)	passivated stainless, bright (assumption)
5	831002	HARDWARE - STOP WASHER - Ø10.5 X Ø20 X 1.5 - AL	4	aluminium sheet 1.5, 5000 or 6000 series (joints register H-08)	mill finish (hidden)
6	838003	HARDWARE - RIVET NUT - M6 - SHEREX CAH3-610-4.2	6	aluminium 5056 (maker)	plain aluminium, as supplied (maker)
7*	838006	HARDWARE - RIVET NUT - M10 - FOR THE LEVELLING GLIDE - HOLD	2	aluminium or steel (HOLD)	zinc plated steel or plain aluminium, with the product (HOLD)
8*	118003	BASE - TUBE END CAP - 100 X 40 - BLACK - HOLD	1	PE or PP insert cap for a 100 x 40 x 2.0 tube, black (product HOLD)	-

NOTES

1. Parts, quantities, materials and finishes as the parts list 110000_P01_BASE_BOM.csv (its rows under 110101), word for word; each part's own drawing holds its sizes and tolerances.
2. Items marked * (7 838006, 8 118003) are not in the STEP 110000_P01_BASE_STEP.step P01: they have no balloon; their places are in their rows and the joints register.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Interface sizes (ordinates, true mm from the STEP): VIEW FROM ABOVE: the spigot, rivnut and glide centres along the band, from the front spigot (datum B of 111101, joints register R-J6).
5. Fitted at the factory (D-87), in this order: the six M6 rivnuts 838003 set in the band's top face (torque HOLD-01), a stop washer 831002 under the head of each of the four J-BASE-01 bolt rivnuts (joints register H-08); the two spigots 831001 screwed into their rivnuts with threadlocker; the M10 rivnuts 838006 set through the band's bottom face and the doublers 111601 (grip 4.5); the glides 118002 preset; the end cap 118003 in the back end (BASE parts list notes).
6. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **BASE - BAND ASSY - SIDE - LH** Viền chân nhôm - cạnh trái (cụm)			
PART NUMBER: **110101**	REV: **P01**	DRAWING NUMBER (FILE): **110101_P01_BASE-BAND-ASSY-SIDE-LH_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:5	SIZE: A1	UNITS: **UNITS: mm**	MASS: 2.0405 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			