
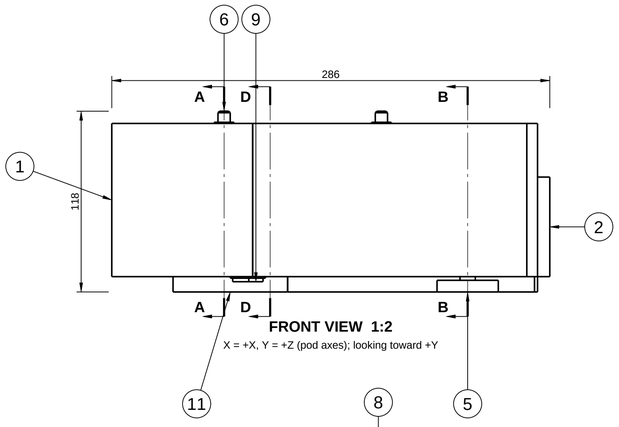



FRONT VIEW 1:2

X = +X, Y = +Z (pod axes); looking toward +Y

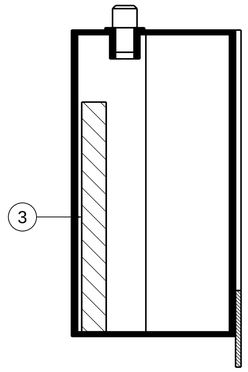


SECTION A-A 1:1

X = +Y, Y = +Z (pod axes); looking toward -X

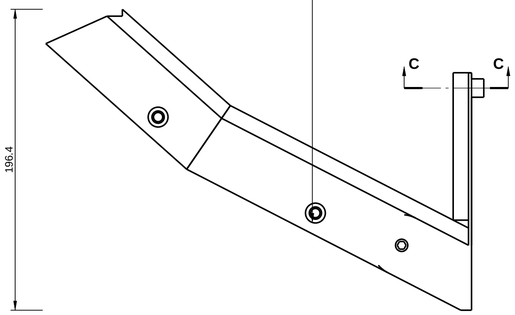


VIEW FROM ABOVE 1:2

X = +X, Y = +Y (pod axes); looking down (toward -Z)




SECTION B-B 1:1

X = +Y, Y = +Z (pod axes); looking toward -X

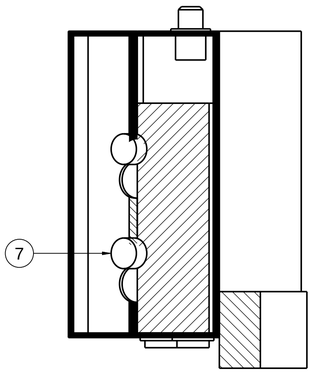

SECTION D-D 1:1

X = +Y, Y = +Z (pod axes); looking toward -X



SECTION C-C 1:1

X = +X, Y = +Z (pod axes); looking toward +Y

PARTS LIST: 110104 BASE - BAND ASSY - FRONT - LH

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	111104	BASE - BAND TUBE - FRONT - FACET 1 - LH	1	aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 with a welded 1.5 mm end plate (alloy: assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
2	111105	BASE - BAND TUBE - FRONT - FACET 2 - LH	1	aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 with a welded 1.5 mm knee end plate, a welded 7 mm door-end block and a welded 2 mm door-end plate (alloy: assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
3	111214	BASE - CORNER KEY - KNEE - LH	1	aluminium EN AW-6061 T6 block (joints register J-BASE-02)	mill finish (hidden)
4	111601	BASE - GLIDE DOUBLER - COMMON	1	aluminium plate EN AW-6082 T6, 5 mm thick (PM ruling 2026-11-01)	mill finish (hidden inside the band, D-79)
5	111602	BASE - LEVELLING GLIDE - M10 - D40	1	zinc-plated free-cutting steel without lead (11SMn30 / AISI 1215 or similar, assumption), turned in one piece: an M10 x 1.5 stem and a base 40 across, 7.6 tall	zinc plated, clear passivated (assumption)
6	831001	HARDWARE - LOCATING SPIGOT - M6 X Ø8 - STAINLESS	2	stainless steel A2 round bar, turned, M6 stud (assumption)	passivated stainless, bright (assumption)
7	838001	HARDWARE - SOCKET HEAD BOLT - M6 X 16 - ISO 4762 8.8 ZINC	2	steel, property class 8.8 (ISO 898-1)	zinc plated (ISO 4042)
8	838003	HARDWARE - RIVET NUT - M6 - STEEL ZINC - SHEREX CAH2-610-4.2	2	steel 1008/1010 (maker)	zinc plated, trivalent passivation (maker)
9	838010	HARDWARE - FLANGED BUTTON HEAD SCREW - M6 X 12 - ISO 7380-2 A2	2	stainless steel A2-70 (ISO 3506-1)	plain stainless, as supplied
10*	838006	HARDWARE - RIVET NUT - M10 - FOR THE LEVELLING GLIDE - HOLD	1	steel C1008/1010 (maker)	zinc plated with yellow trivalent chromate, SFS-01-001 SC2 (maker)
11	118001	BASE - BASE SEAL - LIP - ROOM FLOOR - HOLD	0.394 m	soft lip (sweep) seal, EPDM or TPE, black: a leg bonded to the band's inner face and a fin reaching seal_reach (21.5) below the band's bottom, so it presses on the room floor across the glides' range. Candidate: Trim-Lok X2248, dense EPDM flap 19 to 20 long on a 14.2 x 2.3 leg with 3M acrylic tape, the leg set about 4 below the band's edge so the flap reaches about 23.5; BT-06 decides, an extrusion to BASE's drawing if it fails	black

NOTES

1. Parts, quantities, materials and finishes as the parts list 110000_P01_BASE_BOM.csv (its rows under 110104), word for word; each part's own drawing holds its sizes and tolerances.
2. Items marked * (10 838006) are not in the STEP 110000_P01_BASE_STEP.step P01: they have no balloon; their places are in their rows and the joints register.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Fitted at the factory (D-87), in this order: the M6 rivnuts 838003 set in FL1's and FL2's top faces for DL's two spigots 831001, screwed in with threadlocker (joints register J-FRONT-02); the M10 rivnut 838006 set through FL2's bottom face and its 5 mm load block 111601 (grip 6.5); the glide 111602 preset; the knee key 111214 slid into FL1's knee end and fixed by its 2 screws 838010 through the bottom wall (joints register J-BASE-02); the lip 118001 bonded along both pieces' inner faces and under FL2's door-end plate (D-132; BASE feature rationale FE-07) (BASE parts list notes).
5. On site FL1 goes on along the side band's front key studs through its end plate's keyholes, then down 10; FL2 goes on along the knee key's studs the same way (joints register J-BASE-02).
6. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **BASE - BAND ASSY - FRONT - LH** Viền chân trước - trái (cụm)			
PART NUMBER: **110104**	REV: **P01**	DRAWING NUMBER (FILE): **110104_P01_BASE-BAND-ASSY-FRONT-LH_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:2	SIZE: A1	UNITS: **UNITS: mm**	MASS: 0.9450 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			