



PRINCIPAL VIEW 1:5

X = +X, Y = -Y (pod axes); looking up (toward +Z); origin O1




VIEW FROM ABOVE 1:5

X = +X, Y = +Z (pod axes); looking toward +Y; origin O2



SECTION D-D 2:1

across the bends, at the middle
X = -Z, Y = -Y (pod axes)
looking toward +X



FLAT PATTERN 1:10

from 211801_P01_WALL-CASSETTE-LEDGE-BACK-LOWER-COMMON_DXF.dxf, as its x and y draw it: the side it shows faces you
bend lines thin chain, B1 to B1
UP: the flange folds toward you

HOLES H01-H06: LEDGE - STEEL ANGLE UNDER THE CASSETTE, front face
seen in the view from above; origin O2; +X right, +Y up; drilled from this face

TAG	X (mm)	Y (mm)	SIZE	DEPTH	FEATURE (register) AND FITS
H01	40.00	12.81	Ø3.3, CSK Ø6.7 x 120°	THRU (1.5)	F51 The ledge's own rivet holes, matching F50, countersunk on the upright's room face so the heads sit flush (838012); rivet hole: blind rivet 838012, closed end, countersunk, Ø3.2 (ISO 15974)
H02	254.97	12.81	Ø3.3, CSK Ø6.7 x 120°	THRU (1.5)	F51 The ledge's own rivet holes, matching F50, countersunk on the upright's room face so the heads sit flush (838012); rivet hole: blind rivet 838012, closed end, countersunk, Ø3.2 (ISO 15974)
H03	469.95	12.81	Ø3.3, CSK Ø6.7 x 120°	THRU (1.5)	F51 The ledge's own rivet holes, matching F50, countersunk on the upright's room face so the heads sit flush (838012); rivet hole: blind rivet 838012, closed end, countersunk, Ø3.2 (ISO 15974)
H04	684.92	12.81	Ø3.3, CSK Ø6.7 x 120°	THRU (1.5)	F51 The ledge's own rivet holes, matching F50, countersunk on the upright's room face so the heads sit flush (838012); rivet hole: blind rivet 838012, closed end, countersunk, Ø3.2 (ISO 15974)
H05	899.90	12.81	Ø3.3, CSK Ø6.7 x 120°	THRU (1.5)	F51 The ledge's own rivet holes, matching F50, countersunk on the upright's room face so the heads sit flush (838012); rivet hole: blind rivet 838012, closed end, countersunk, Ø3.2 (ISO 15974)
H06	1114.87	12.81	Ø3.3, CSK Ø6.7 x 120°	THRU (1.5)	F51 The ledge's own rivet holes, matching F50, countersunk on the upright's room face so the heads sit flush (838012); rivet hole: blind rivet 838012, closed end, countersunk, Ø3.2 (ISO 15974)

BENDS B1-B1: 211801_P01_WALL-CASSETTE-LEDGE-BACK-LOWER-COMMON_DXF.dxf
UP: the flange folds toward the viewer of the flat pattern as drawn; K-factor 0.44, inside radius from the model

TAG	LINE IN THE FLAT (mm)	DIRECTION	ANGLE	INSIDE RADIUS	BEND ALLOWANCE (mm)
B1	y 26.7 from the lower edge	UP	90°	R1.5	3.393

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/2**

TITLE:
WALL - CASSETTE LEDGE - BACK LOWER - COMMON
Vách hậu - thanh đỡ cassette dưới (dùng chung)

PART NUMBER	REV	DRAWING NUMBER (FILE)
211801	**P01**	**211801_P01_WALL-CASSETTE-LEDGE-BACK-LOWER-COMMON_DWG**

MATERIAL: MATERIAL: galvanized steel sheet 1.5, DX51D+Z (EN 10346), Z100

FINISH: FINISH: pre-galvanized sheet, Z100; cut edges as cut (assumption)


SCALE	SIZE	UNITS	MASS
1:5 (sections D-D 2:1) (flat pattern 1:10)	A1	**UNITS: mm**	0.643 kg (calculation)

CREATED BY	APPROVED	TOLERANCES
Autonomous	not released	TOLERANCE: see the notes; not ISO 2768

PROJECTION: ISO first angle (ISO 5456-2)

GENERAL NOTES

1. UNITS: mm. Do not scale the drawing. ISO first-angle projection (ISO 5456-2), symbol in the title block. Dimensions to ISO 129-1. Sheet 1: views, sections and hole tables; sheet 2: these general notes.
2. Views: the principal view looks up (toward +Z) (X = +X, Y = -Y (pod axes); looking up (toward +Z)); every view's title gives its own X and Y and how they map to the pod axes (conventions section 4). On every view X runs right and Y up.
3. Origin O = the part's corner shown; O1, O2... are O seen in each view. Hole positions in the tables are from O.
4. LEDGE (D-170): galvanized steel sheet 1.5, DX51D+Z (EN 10346), Z100. Blank laser cut from its DXF with its 6 rivet holes Ø3.3; each hole countersunk Ø6.7 x 120° by machining on the upright's room face; then folded 90° on a press brake, inside radius 1 x t (the model's; K 0.44 in the DXF, an assumption until the factory's bend table).
5. Fitted after the frame is welded and touched up (J-FRAME-01): held on the bottom rail's room face as the drill jig for the rail's plain Ø3.3 holes, then riveted with 6 closed-end countersunk blind rivets 838012 (ISO 15974, Ø3.2 x 8; D-166), the heads flush, 0 to 0.3 under the face, so they stay clear of the cassette's tray.
6. The pad 848015 (PORON 4701-40, 18 wide, PSA) goes on the leg's flat past its bend; the cassette's bottom return rests on it (D-170).
7. Holes go THRU the part unless the table says otherwise; deburr both sides.
8. Bent from the flat pattern v2/03-Manufacturing/wall/211801_P01_WALL-CASSETTE-LEDGE-BACK-LOWER-COMMON_DXF.dxf (sha256 62920c9ba0b7): its CUT outline, its BEND lines the bend centre lines, its MARK lines the bend zones' edges. Inside radius R1.5 from the model; K-factor 0.44 (calculation: the DXF's bend lines and flat size against the model's flanges at that radius, every bend within 0.05). Flange lengths are outside sizes, to each fold's outside sharp; the bend table gives each bend's direction, angle and allowance.
9. TOLERANCES (PROPOSED until the shop confirms; not ISO 2768): blank ±0.5; fold 90° ±1° (assumption); rivet holes ±0.2 to each other and to the ends (assumption: the ledge is the rail's drill jig); countersinks Ø6.7 +0.2/0 at 120° ±1°, so every head (Ø5.8 to 6.7) sits flush or under, with 0.52 of the upright left under it
10. Source: v2/03-Manufacturing/wall/210201_P01_WALL-PANEL-ASSY-BACK-LOWER-B1_STEP.step (sha256 a6bfcc15a24b; declared unit cm, read in mm and checked against tools/checks/stepfile.py, worst box difference 0 mm); parts list v2/03-Manufacturing/wall/210201_P01_WALL-PANEL-ASSY-BACK-LOWER-B1_BOM.csv; feature rationale v2/02-Drawings/wall/FEATURE-RATIONALE-210201.md. From that STEP: regenerate it, never edit the PDF.

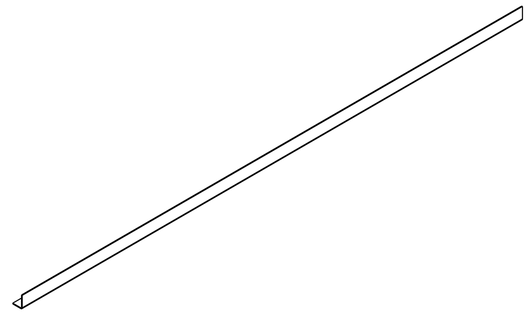

ISOMETRIC VIEW 1:5
for identification only

PROJECT **Spaceship (FocusPod v2)**	STATUS **DRAFT**	DATE 2026-11-01	SHEET **2/2**

TITLE
WALL - CASSETTE LEDGE - BACK LOWER - COMMON
Vách hậu - thanh đỡ cassette dưới (dùng chung)

PART NUMBER	REV	DRAWING NUMBER (FILE)
211801	**P01**	**211801_P01_WALL-CASSETTE-LEDGE-BACK-LOWER-COMMON_DWG**

MATERIAL
MATERIAL: galvanized steel sheet 1.5, DX51D+Z (EN 10346), Z100

FINISH
FINISH: pre-galvanized sheet, Z100; cut edges as cut (assumption)

SCALE	SIZE	UNITS	MASS
1:5 (sections D-D 2:1) (flat pattern 1:10)	A1	**UNITS: mm**	0.643 kg (calculation)

CREATED BY	APPROVED	TOLERANCES
Autonomous	not released	TOLERANCE: see the notes; not ISO 2768

PROJECTION ISO first angle (ISO 5456-2)