

Dummy Script Usage Guide

Written by: Chelsea (Project Manager)

What's this script for?

generate_dummy_data.js is a script that creates 10 organisers, 10 events, and 50 bookings using the [@faker-js/faker](https://github.com/fakerjs/faker) library. It is meant to simulate realistic test data and is useful when testing for backend routes, populating a database or mocking outputs in system development.

! Prereqs !


To run this script, you'll need:

- Node.js installed on your machine.
Download: <https://nodejs.org>
- A terminal that can run commands (Command Prompt, Terminal, etc.)

To set yourself up (I'm writing this with the assumption you're on Windows):

1. Open Terminal
 - 1.1. On Windows, press Windows + R
 - 1.2. Type cmd
 - 1.3. Press enter
2. Navigate to the folder with the script
 - 2.1. cd path\to\where\generate_dummy_data.js\is
3. Install Faker (only once)
If this is your first time using the script, run:
 - 3.1. npm install @faker-js/faker
4. This will create a node_modules/ folder and install the faker dependency locally.

E.g. My desktop looks like this:

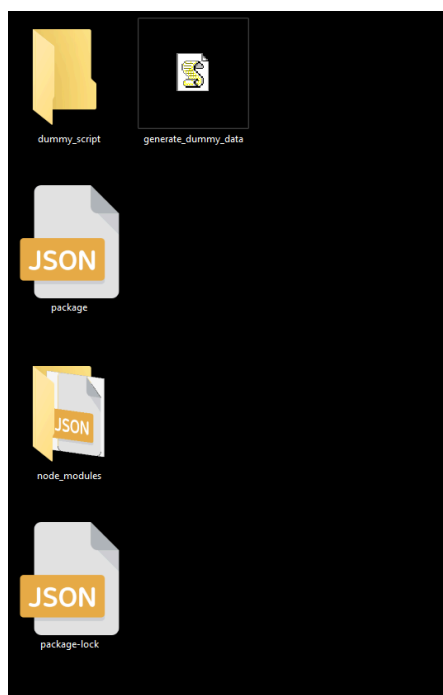

Running the Script

1. Once in the correct folder and faker is installed, run in your Command Prompt:
 - 1.1. `node generate_dummy_data.js`

You'll then see output like this:

```
C:\Users\61449\Desktop>node generate_dummy_data.js

Sample Organisers:
[
  {
    "id": "org001",
    "name": "Leonard Torphy",
    "email": "Wilton.Johnston51@yahoo.com",
    "password": "eg32Leiq4WfbtTl",
    "role": "organiser"
  },
  {
    "id": "org002",
    "name": "Carol Halvorson II",
    "email": "Melyssa_Kerluke@yahoo.com",
    "password": "OoVSoFAW8Scfab",
    "role": "organiser"
  }
]

Sample Events:
[
  {
    "id": "event001",
    "title": "Psychedelic Night at East Allyfurt",
    "description": "Join us for a night of High Classical featuring Roberta Cronin and other local legends.",
    "date": "2026-01-19T08:26:42.364Z",
    "location": "Reingerfurt",
    "organiserId": "org001",
    "capacity": 115,
    "ticketsAvailable": 192
  },
  {
    "id": "event002",
    "title": "Post Dubstep Night at Sheboygan",
    "description": "Join us for a night of Acid House featuring Jordan Kling and other local legends.",
    "date": "2025-11-21T20:02:30.896Z",
    "location": "Leuschketown",
    "organiserId": "org002",
    "capacity": 107,
    "ticketsAvailable": 267
  }
]

Sample Bookings:
[
  {
    "bookingId": "bk001",
    "userId": "Ryder.Hackett",
    "eventId": "event001",
    "status": "confirmed"
  },
  {
    "bookingId": "bk002",
    "userId": "Simeon.Hill",
    "eventId": "event003",
    "status": "cancelled"
  },
  {
    "bookingId": "bk003",
    "userId": "Edwardo.Stokes57",
    "eventId": "event001",
    "status": "confirmed"
  },
  {
    "bookingId": "bk004",
    "userId": "Spencer.Littel82",
    "eventId": "event009",
    "status": "pending"
  },
  {
    "bookingId": "bk005",
    "userId": "Luz20",
    "eventId": "event002",
    "status": "cancelled"
  }
]

Dummy data successfully generated. Add to CI/CD pipeline for seeding and auto-testing. Love you, bye :D
```

Expected output format should look like:

- Organisers - Array of organiser objects with IDs, names, emails and roles
- Events - Each linked to an organiser, with titles, capacity, location, and date
- Bookings - 50 random bookings, linked to users and events

Only a preview is logged, but you can modify the script to log/export all of the data if needed. Do note that: You can edit the numbers in the for loops if you want more/less test data