
[2/5]

```
; preds = %for.inc, %entry
                                                                                                    for.cond:
                                                                                                     %m.0 = phi i32 [ 0, %entry ], [ %inc, %for.inc ], !dbg !1311
                                                                                 call void @llvm.dbg.value(metadata i32 %m.0, metadata !1307, metadata !DIExpression()), !dbg !1309
                                                                                                               %cmp = icmp slt i32 %m.0, 5, !dbg !1313
                                                                                                        br i1 %cmp, label %for.body, label %for.end, !dbg !1314
                                                                            ; preds = \% for.cond
                    call void @llvm.dbg.value(metadata i32 1, metadata !1315, metadata !DIExpression()), !dbg !1316
                                                %idxprom = sext i32 0 to i64, !dbg !1317
  %arrayidx = getelementptr inbounds [10 x [10 x [10 x [5 x i32]]]], [10 x [10 x [10 x [5 x i32]]]]* %a, i64 0, i64 %idxprom, !dbg !1317
                                               %idxprom1 = sext i32 1 to i64, !dbg !1317
    %arrayidx2 = getelementptr inbounds [10 x [10 x [5 x i32]]], [10 x [10 x [5 x i32]]]* %arrayidx, i64 0, i64 %idxprom1, !dbg !1317
                                               %idxprom3 = sext i32 1 to i64, !dbg !1317
          %arrayidx4 = getelementptr inbounds [10 x [5 x i32]], [10 x [5 x i32]]* %arrayidx2, i64 0, i64 %idxprom3, !dbg !1317
                                             %idxprom5 = sext i32 %m.0 to i64, !dbg !1317
                %arrayidx6 = getelementptr inbounds [5 x i32], [5 x i32]* %arrayidx4, i64 0, i64 %idxprom5, !dbg !1317
                                          %0 = load i32, i32* %arrayidx6, align 4, !dbg !1317
                                                %sub = sub nsw i32 %0, 100, !dbg !1319
                                               %idxprom7 = sext i32 0 to i64, !dbg !1320
 % \text{arrayidx8} = \text{getelementptr inbounds} [10 \times [10 \times [10 \times [5 \times i32]]]], [10 \times [10 \times [5 \times i32]]] * \% a, i64 0, i64 % idxprom 7, !dbg !1320
                                               %idxprom9 = sext i32 1 to i64, !dbg !1320
  %arrayidx10 = getelementptr inbounds [10 x [10 x [5 x i32]]], [10 x [10 x [5 x i32]]]* %arrayidx8, i64 0, i64 %idxprom9, !dbg !1320
                                               %idxprom11 = sext i32 1 to i64, !dbg !1320
        %arrayidx12 = getelementptr inbounds [10 x [5 x i32]], [10 x [5 x i32]]* %arrayidx10, i64 0, i64 %idxprom11, !dbg !1320
                                            \%idxprom 13 = sext i 32 \% m.0 to i 64, !dbg ! 1 3 2 0
              %arrayidx14 = getelementptr inbounds [5 x i32], [5 x i32]* %arrayidx12, i64 0, i64 %idxprom13, !dbg !1320
                                          store i32 %sub, i32* %arrayidx14, align 4, !dbg !1321
                    call void @llvm.dbg.value(metadata i32 2, metadata !1315, metadata !DIExpression()), !dbg !1316
                                               %idxprom15 = sext i32 0 to i64, !dbg !1322
%arrayidx16 = getelementptr inbounds [10 x [10 x [10 x [5 x i32]]], [10 x [10 x [10 x [5 x i32]]] * %a, i64 0, i64 %idxprom15, !dbg !1322
                                               %idxprom17 = sext i32 1 to i64, !dbg !1322
 %arrayidx18 = getelementptr inbounds [10 x [10 x [5 x i32]]], [10 x [10 x [5 x i32]]]* %arrayidx16, i64 0, i64 %idxprom17, !dbg !1322
                                               %idxprom19 = sext i32 2 to i64, !dbg !1322
        %arrayidx20 = getelementptr inbounds [10 x [5 x i32]], [10 x [5 x i32]]* %arrayidx18, i64 0, i64 %idxprom19, !dbg !1322
                                            %idxprom21 = sext i32 %m.0 to i64, !dbg !1322
               %arrayidx22 = getelementptr inbounds [5 x i32], [5 x i32]* %arrayidx20, i64 0, i64 %idxprom21, !dbg !1322
                                          %1 = load i32, i32* %arrayidx22, align 4, !dbg !1322
                                               %sub23 = sub nsw i32 %1, 200, !dbg !1323
                                               %idxprom24 = sext i32 0 to i64, !dbg !1324
%arrayidx25 = getelementptr inbounds [10 x [10 x [10 x [5 x i32]]], [10 x [10 x [10 x [5 x i32]]] * %a, i64 0, i64 %idxprom24, !dbg !1324
                                               %idxprom26 = sext i32 1 to i64, !dbg !1324
 %arrayidx27 = getelementptr inbounds [10 x [10 x [5 x i32]]], [10 x [10 x [5 x i32]]]* %arrayidx25, i64 0, i64 %idxprom26, !dbg !1324
                                              %idxprom28 = sext i32 2 to i64, !dbg !1324
        %arrayidx29 = getelementptr inbounds [10 x [5 x i32]], [10 x [5 x i32]]* %arrayidx27, i64 0, i64 %idxprom28, !dbg !1324
                                            %idxprom30 = sext i32 %m.0 to i64, !dbg !1324
              %arrayidx31 = getelementptr inbounds [5 x i32], [5 x i32]* %arrayidx29, i64 0, i64 %idxprom30, !dbg !1324
```

store i32 %sub23, i32* %arrayidx31, align 4, !dbg !1325 br label %for.inc, !dbg !1326

for.body:

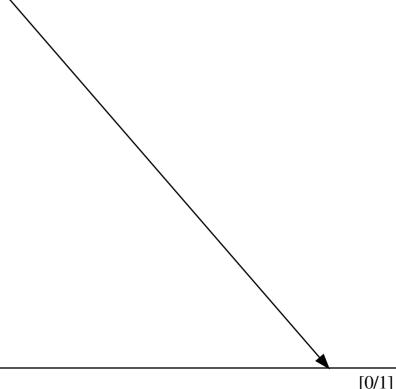

; preds = % for.body%inc = add nsw i32 %m.0, 1, !dbg !1327 call void @llvm.dbg.value(metadata i32 %inc, metadata !1307, metadata !DIExpression()), !dbg !1309 br label %for.cond, !dbg !1328, !llvm.loop !1329