

Module – 18

1. Forest Level Trust
2. DNS
3. Gobal Catalog



Forest Level Trust

Types of Trust	Kind of trust	
	Implicit	Transitive
Tree-root	Implicit	Transitive
Parent-Child	Implicit	Transitive
Forest-Root	Explicit	Transitive
External	Explicit	Non-transitive



Forest Level Trust

- » A forest is collection of domain
- » Within forest all domain have by default trust relationship among each other
- » Within a forest all DC have same schema and configuration partitions



Forest Level Trust

- » Two forest do not have trust by default
- » Users from local forest will not be able to login to the specified forest and vice versa
- » Two way to create a trust between forest
- » Forest – root trust
- » External Trust



Forest Level Trust

- » Forest – root trust
- » Allows user in any domain of the one forest to login into any domain of other forest
- » This trust is **explicit** and **transitive**
- » External Trust
- » The trust between the domain of 2 forest only
- » This trust is **explicit and non-transitive**



Forest Level Trust

- » DNS setup between forest
- » Before we create the trust, DNS of local forest must know the DNS of specified forest
- » So, we need to create DNS conditional forwarders in **both forest**
- » dnsmgmt.msc > Conditional forwarder



DNS

- » Before DNS, host file were used to backup the data:
- » C: \windows\system32\drivers\etc
- » File name: Host file (to edit, open with notepad)
- » Ipconfig/displaydns → Display DNS cache
- » Ipconfig/flushdns → Clear DNS cache
- » Nslookup is used for DNS checking - Its ignore the DNS cache



DNS

- » AD integrated DNS
- » It store DNS data in AD.
- » It is by default replicated to all domain controllers in the same domain



DNS Records:

- » A → Name to IP
- » C name → Name to Name records
- » NS → DNS server name
- » SOA → Stored admin information like email address of admin, serial number
- » SRV records → Service related records




Types of Forwarder:

- » **Conditional** Forwarder: Our DNS server will forward queries for specific domain to this DNS server
- » Forwarder/**Blind** Forwarder: Our DNS will forward all queries which it can not resolve to this DNS server



Name to IP resolution

1. PC look first in to **host file**.
2. PC will check **cache**
3. PC will send recursive query to its **own DNS server**
4. Own DNS server will check in:
 - ✓ Primary Zone
 - ✓ Secondary Zone
 - ✓ Delegation
 - ✓ Stub Zone
 - ✓ Conditional forwarders
 - ✓ Forwarders

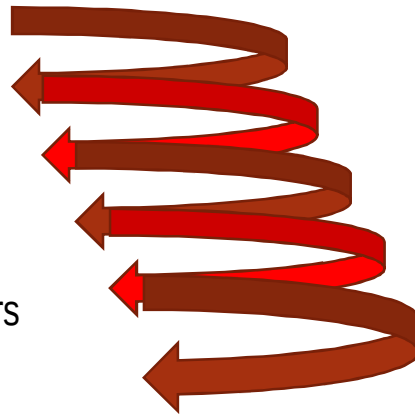




Name to IP resolution:-

5. If forwarder is configured with google DNS (8.8.8.8) our own dns server will send a recursive query for Flipkart.com to forwarder
6. Received answer will be store in cache of our root DNS sever
7. Our DNS will reply to PC
8. PC will store IP of flipkart.com in it cache
9. The cache time depends on TTL value

Global catalogue

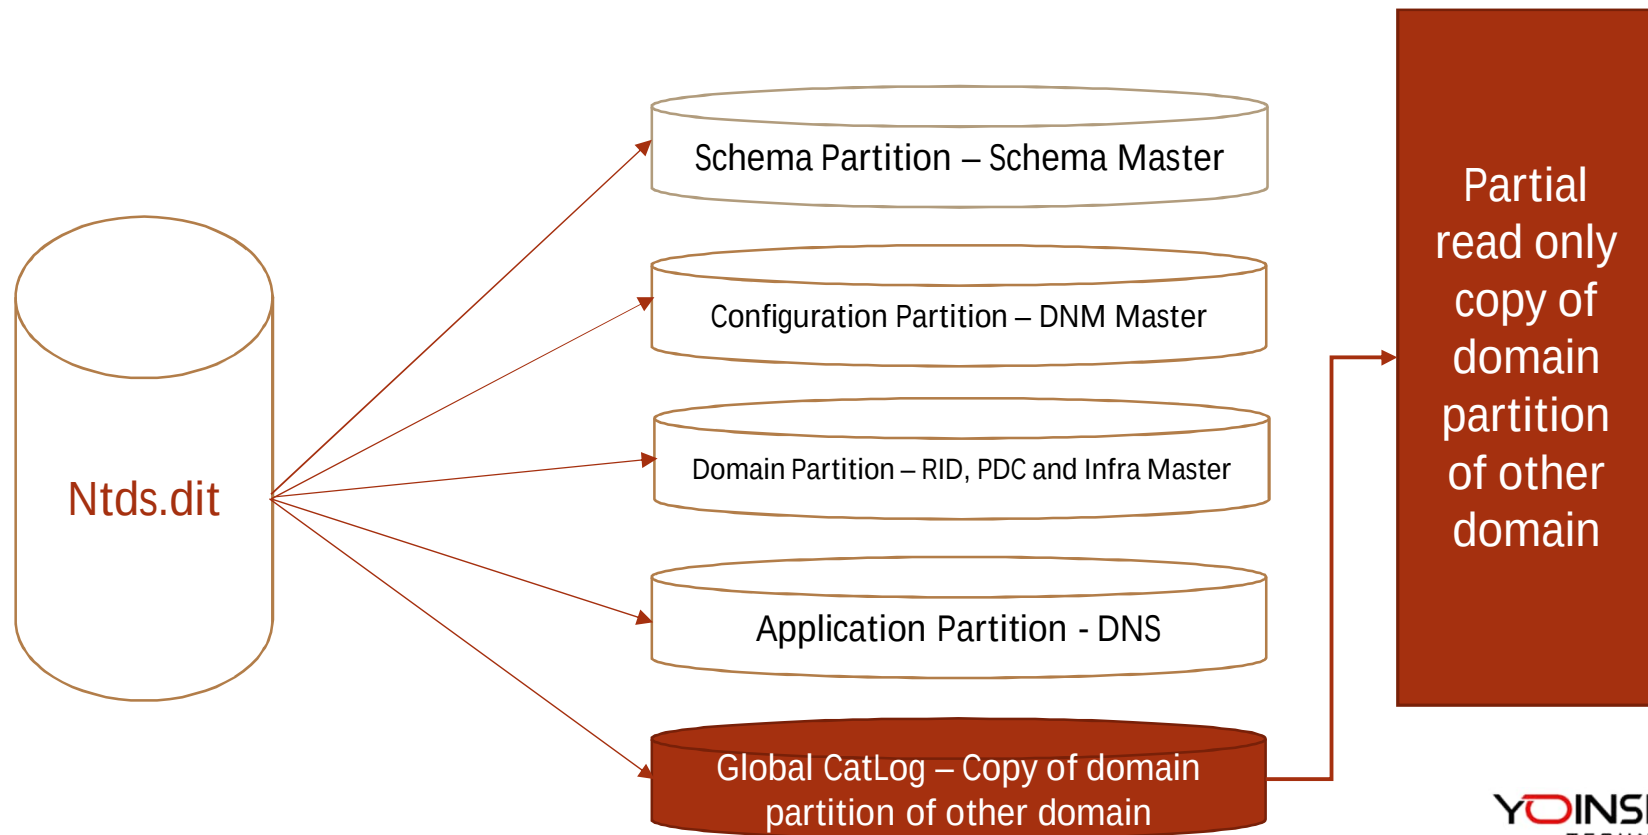



Global Catalog

- » A global catalogue server contains information about every object in the forest
- » GCS help us to query and find object in forest
- » By default first DC of forest is a GCS
- » You can make other DC as GCS