


Module – 17

RODC, Parent Domain, Child Domain, Tree Domain



Contents..

1. RODC
2. Child Domain
3. Trust
4. DNS delegation
5. DNS forwarder
6. Stub Zone
7. Secondary Zone



RODC (Read Only Domain Controller)

- » RODC available from Windows 2003 onwards
- » First DC of the forest can never be RODC.
- » RODC is additional DC that has only read-only copy of AD database (ntds.dit)
- » In RODC we cannot create any object
- » RODC addresses **some of the problems** that are commonly found in branch office.
- » **Branch with low/no physical security, low bandwidth, or inadequate expertise to support additional domain controller.**
- » For above types of branch we can have RODC which is far more beneficial than additional domain controller

Functionalities of RODC

Read-only AD DS database

Uni-directional Replications


Credential caching

Administrator role separation



Child Domain

- » Normally most of company has single domain
- » Child domain may be required due to below reason
- » Company is Geographical spread
- » We want separate administration like group policy
- » We want to have separate AD database

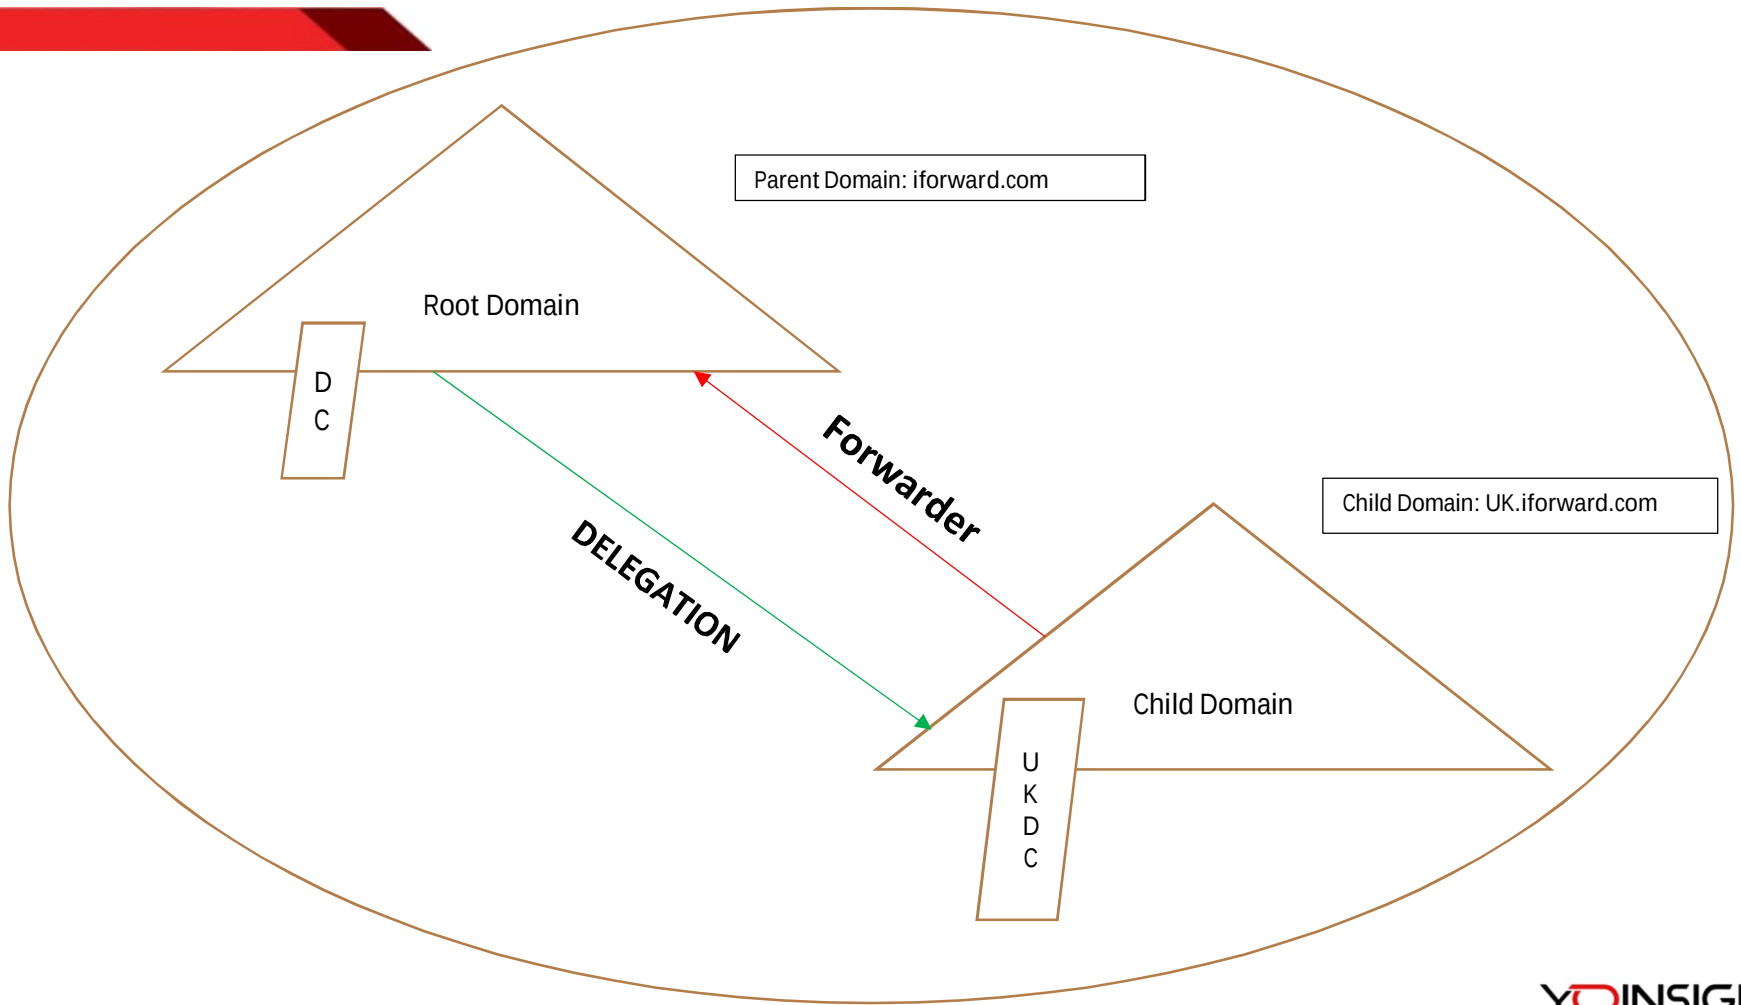



Trust

- » Secure communication paths that allow objects in one domain to be authenticated and accepted in other domain
- » Some trusts are automatically created. Like Parent-child domains trust and Tree root domains trust
- » When child domain is created, Parent & Child domain form trust between each other.
- » This trust know as Parent & Child trust
- » Parent & Child trust is implicit, 2 way, transitive
- » Parent & Child trust enable user logon and share resources to each other domain



DNS Delegation

- » When child domain is created, below things happen in parent and child DNS.
- » **DNS Delegation: -**
- » In Parent DNS Automatically an entry for child domain is created which is know as DNS delegation
- » DNS delegation consist of Child domain's DNS name and IP
- » DNS delegation created only for child domain



DNS Forwarder

- » In child DNS automatically a DNS forwarder entry is created which points towards parent DNS
- » Child DNS will forward all query which it cannot resolve to parent DNS



Stub Zone

- » DNS **stub zones** are used to enable your DNS servers to resolve DNS queries of another domain (ZONE)
- » Stub zone contains only the records that identify the DNS servers for other domain (ZONE) e.g Tree Domain
- » A stub zone is not created automatically when a new tree domain is created.
- » You will need to manually create a stub zone in the root domain (iforward.in) if you want to allow DNS queries for the tree domain (xyz.com) to be resolved by clients in the root domain.



Secondary Zone

- » DNS secondary zone is read only copy of the primary zone of another domain in same forest.
- » Using Secondary zone your DNS server can resolve other domain (Zone) DNS queries on its own.