




Module – 13

Site and Services



1. Site and services

- ✓ In an active directory the domain is the logical topology
- ✓ While site and services are the physical topology
- ✓ Site and services allow client to authenticate in there site and help to control replication
- ✓ By default the default-First-Site-Name is created and all DC are part of this site




2. How PC finds the DC

- ✓ PC ask the DNS for list of DC (Domain Controller) in it domain.
- ✓ DNS reply with list of all DC who have registered there SRV records
- ✓ PC contact all DC one by one
- ✓ If Site and services not configured PC will authenticate with any DC.
- ✓ This is known as “Random Authentication”




2. How PC finds the DC

- ✓ If Site and services is configured
- ✓ PC/client authenticate with only those DC which are in same site.
- ✓ This is known as “Control Authentications”
- ✓ However, DC of same site is not available to authentication then PC will authenticate with any DC in domain.



3. Replication

- ✓ Intra-site replications: Replication occurs between DC in same site
- ✓ Schedule: 15 seconds
- ✓ Inter-site Replication: Replication among DC in different site using Bridge Head Server
- ✓ Schedules: Default is every 180 minutes, minimum is every 15 Minutes



4. Site Link

- ✓ It is a logical connection between sites
- ✓ Default-IP-Site-Link is by default created
- ✓ Important in case of replications.




5. Bridgehead Server

- ✓ Mainly used for inter-site replications
- ✓ By default there is one bridgehead server for every site
- ✓ The Bridgehead server from the originating site collects all of the replications changes and then sent them to receiving site bridgehead server, which replicate the changes to all domain controllers in its site.

6. KCC – Knowledge Consistency Checker

- ✓ The KCC is a process that runs on all domain controllers every 15 min
- ✓ KCC Automatically generates and maintains the intra-site and inter-site replication topology and select bridgehead server
- ✓ The KCC also dynamically adjusts the topology to accommodate new domain controllers and removed domain controllers

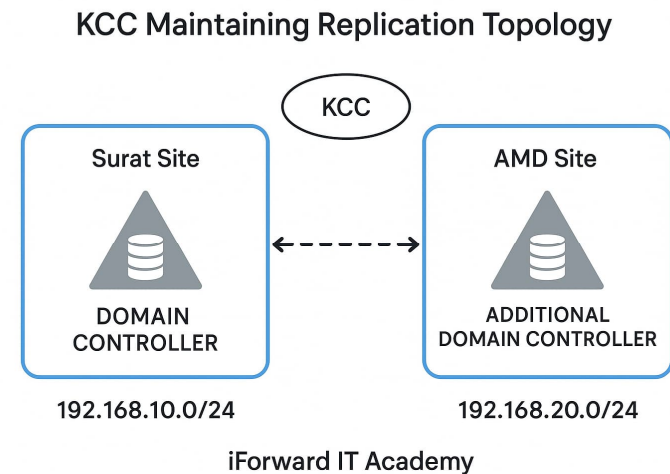



7. COST

- ✓ SiteLink can be assigned a cost, which gives priority to one Site link over another, where multiple paths between the same two sites exist.
- ✓ Site Link with lowest cost is selected for replication

7. REPADMIN

- ✓ The primary use of Repadmin is to monitor replication so that you can identify problems, also you can force replication between domain controllers
- ✓ Repadmin /replicate adc dc dc=iforward,dc=com
- ✓ URGENT REPLICATION between domain controllers
- ✓ Repadmin /replsum → CHECK REPLICATION SUMMARY
- ✓ Repadmin /showrepl /errorsonly → SEE ERRORS IN REPLICATION
- ✓ Repadmin /kcc → RUN KCC MANUALLY

