

Stage 1: Endpoint-trained 3D KL-VAE (M_0 / M_t)

$L_{rec} + \beta L_{KL}$

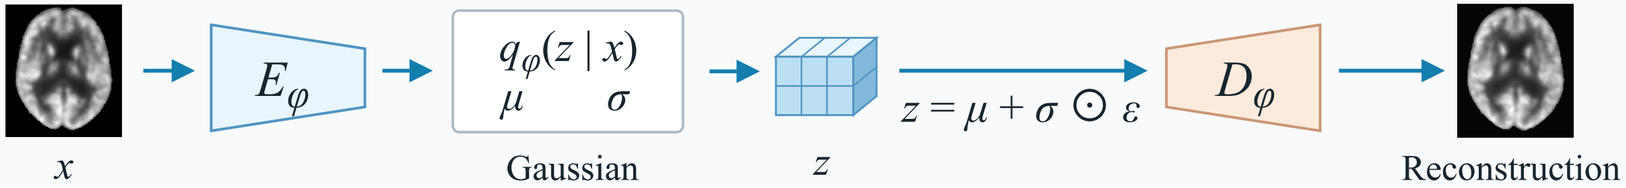


Stage 2: Latent trajectory learning with intermediate anchors

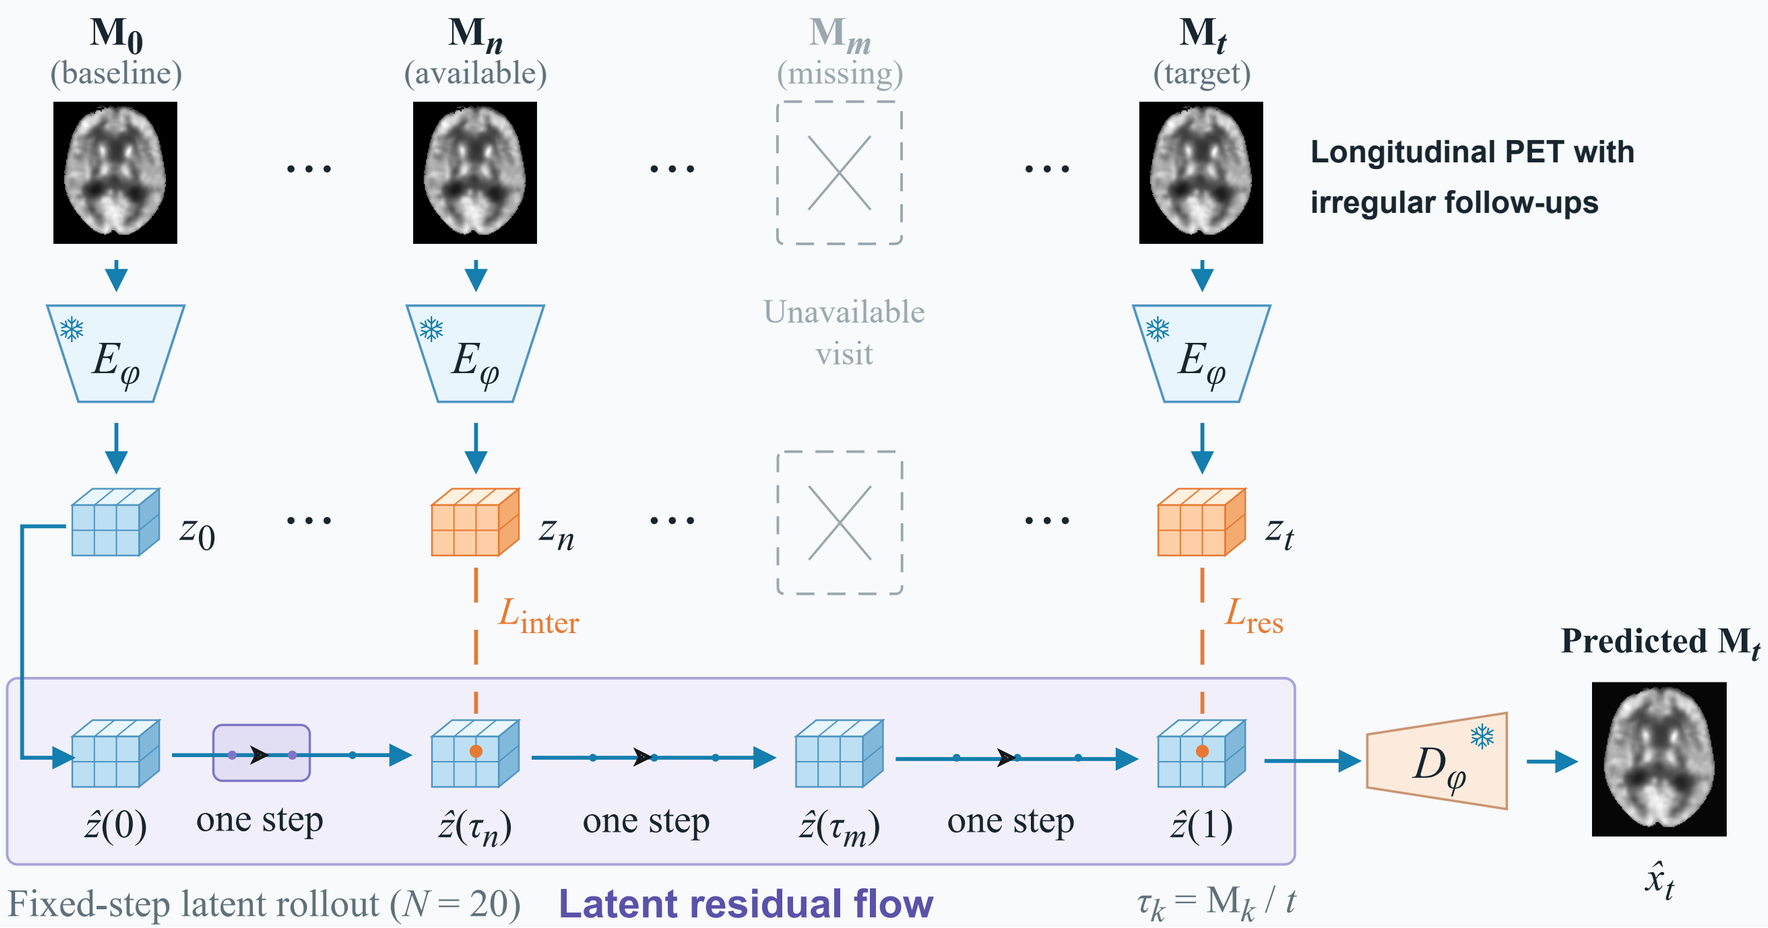


Longitudinal PET with irregular follow-ups

Inference stage with only baseline (M_0) PET as input

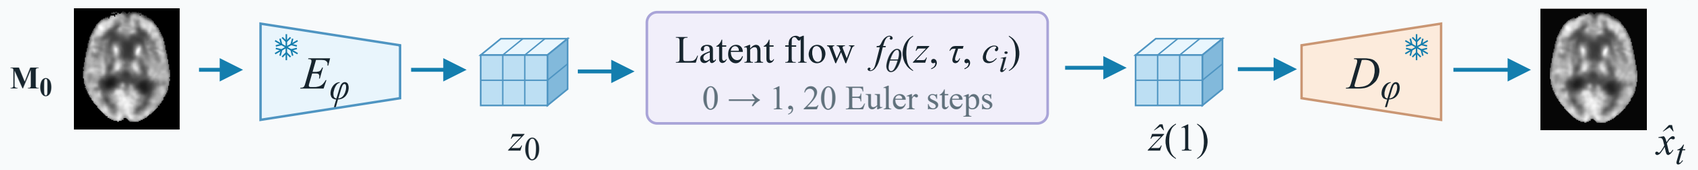

One step in the latent residual flow

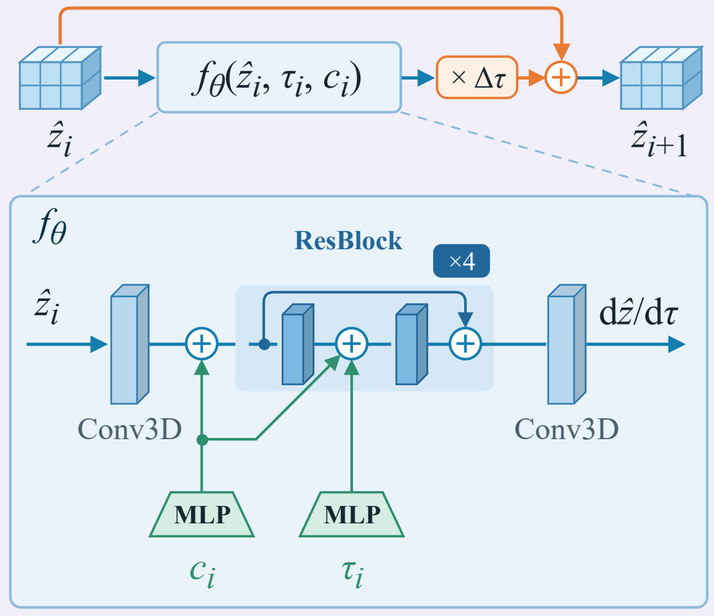

$$\hat{z}_{i+1} = \hat{z}_i + \Delta\tau \cdot f_\theta(\hat{z}_i, \tau_i, c_i),\ \Delta\tau = 1/N$$

Irregular PET follow-ups examples

