


Fig 4 — Same training config, ~50% different median noise scale across seed-batches

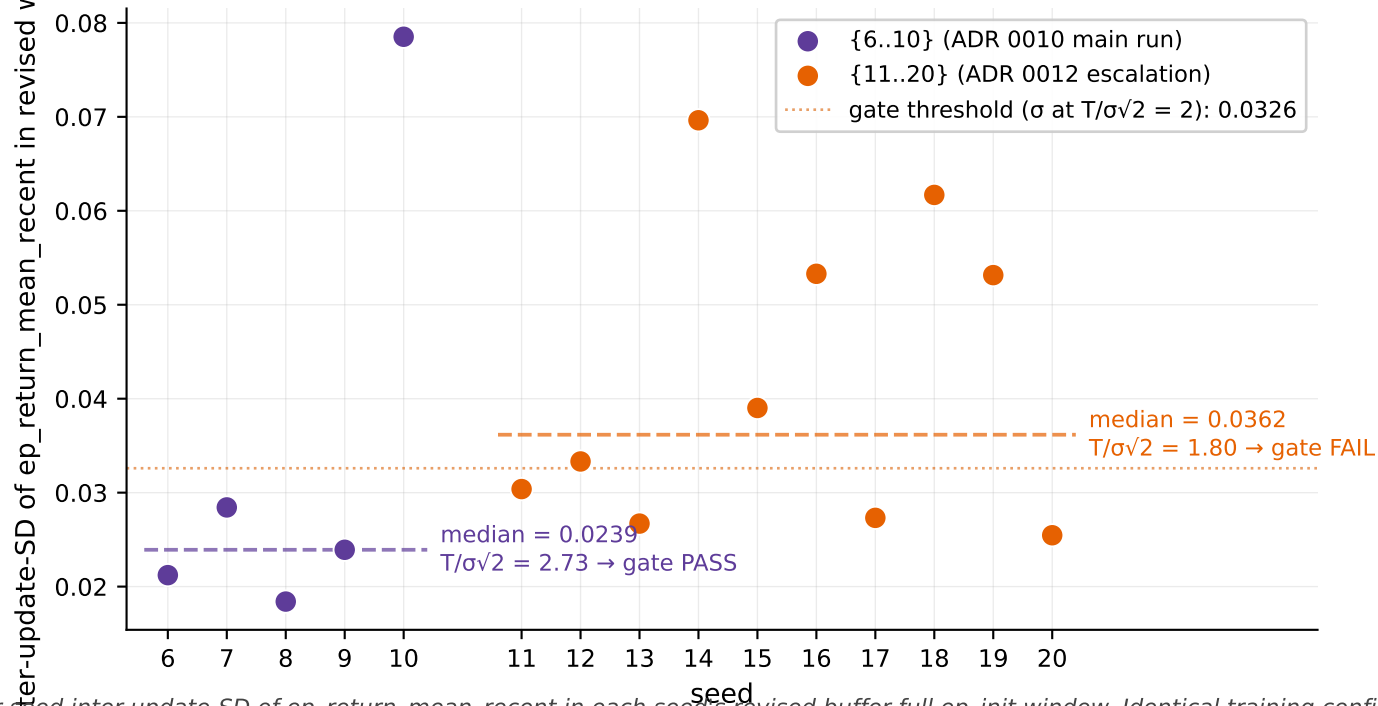

Per-seed inter-update-SD of `ep_return_mean_recent` in each seed's revised buffer-full `ep_init` window. Identical training config produces medians 0.024 vs 0.036 (50% difference) across the two seed-batches — large enough to flip the criterion-validity gate from PASS (2.73) to FAIL (1.80) without any methodology change.