



A Naive annotation: an artefact

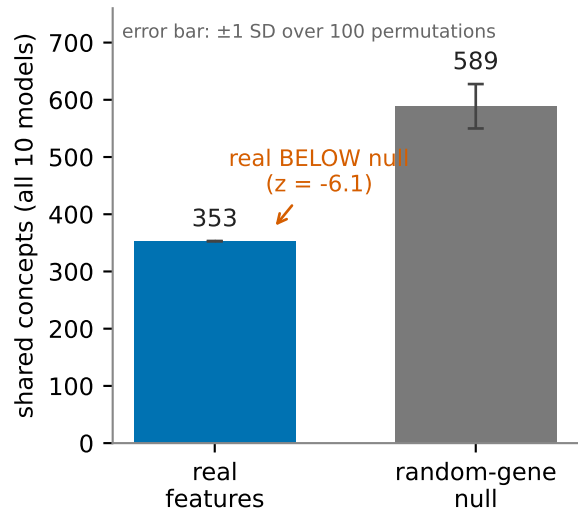

permissive annotator, mid layer
all-layer union, same test: 2,267 vs 3,563 $\pm$ 70 ($z = -18.4$)

B Backbone vs nulls (log)

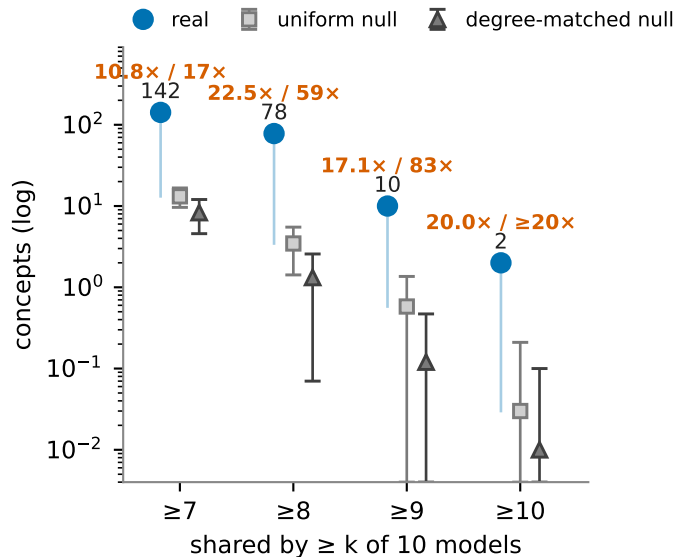

250 permutations, empirical $p < 0.004$ at every tier; whiskers ± 1 SD, clipped at the axis floor;
fold = real $\div$ uniform null / real $\div$ degree-matched null (a null mean below 0.1 is divided as 0.1, so $\geq$ is a lower bound)

C Held-out replication

