

# Outline

- Prior/likelihood sensitivity checks
- Variable selection with projpred
- Bayesian software for Python users

# Prior/likelihood sensitivity checks

- Insert slides here

# Variable selection

- The process of identifying the most relevant variables in a model from a larger set of predictors.
- We assume variables contribute unevenly to the outcome.
  - We may want to identify the most "important" ones.
  - Sometimes we also want to rank them.

## Motivation for variable selection

- We can always include all available variables in a model

## Motivation for variable selection

- We can always include all available variables in a model
- Theory says this is a good idea, in particular if we use predictively consistent priors

# Motivation for variable selection

- We can always include all available variables in a model
- Theory says this is a good idea, in particular if we use predictively consistent priors
- However, sometimes we need to reduce the number of variables
  - measurement cost in covariates
  - running cost of predictive model
  - easier explanation / learn from the model

## The problem with variable selection

- The number of potential models is  $2^p$ , where  $p$  is the number of variables
- Evaluating all models can be computationally infeasible even for moderate  $p$
- The process is prone to overfitting

## How to overcome the problem?

- We recommend to use a technique called projection predictive inference
- It can be easily done with brms + projpred



# Variable selection with projpred

- The main advantage is that it reduces overfitting
- Other advantages are:
  - Automatic model building and fitting process.
  - Reduced number of models we need to fit.
  - Reduced time it takes to fit each model.

# Main concepts

- Reference model:
- Search strategy:
- Projection:

# Main concepts

- Reference model:
  - A model that includes all available variables and describes the data well.
- Search strategy:
- Projection:

# Main concepts

- Reference model:
  - A model that includes all available variables and describes the data well.
- Search strategy:
  - A method for searching through the model space.
- Projection:

# Main concepts

- Reference model:
  - A model that includes all available variables and describes the data well.
- Search strategy:
  - A method for searching through the model space.
- Projection:
  - A way to estimate the posterior distribution of a model given a reference model.

# Useing a reference model is not a novel idea

- Lindley (1968): *The choice of variables in multiple regression*
  - Bayesian and decision theoretical justification, but simplified model and computation

# Useing a reference model is not a novel idea

- Lindley (1968): *The choice of variables in multiple regression*
  - Bayesian and decision theoretical justification, but simplified model and computation
- Goutis & Robert (1998): *Model choice in generalised linear models: a Bayesian approach via Kullback-Leibler projections*
  - one key part for practical computation


# Using a reference model is not a novel idea

- Lindley (1968): *The choice of variables in multiple regression*
  - Bayesian and decision theoretical justification, but simplified model and computation
- Goutis & Robert (1998): *Model choice in generalised linear models: a Bayesian approach via Kullback-Leibler projections*
  - one key part for practical computation
- Related approaches
  - gold standard, preconditioning, teacher and student, distilling, . . .



## Example: Simulated regression

$$f \sim N(0, 1),$$
$$y | f \sim N(f, 1)$$

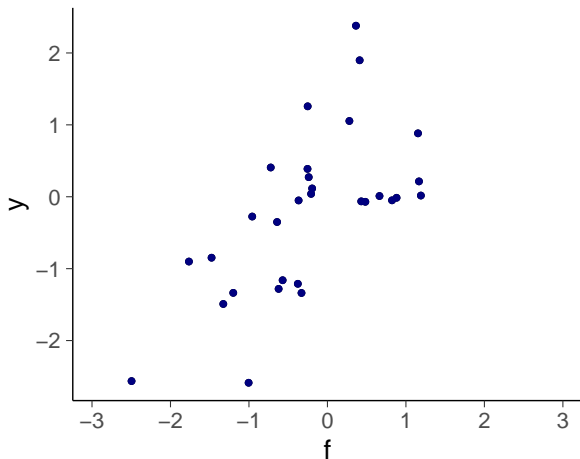


## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathrm{N}(0, 1), & x_j | f \sim \mathrm{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathrm{N}(f, 1) & x_j | f \sim \mathrm{N}(0, 1), & j = 151, \dots, 500. \end{array}$$


## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

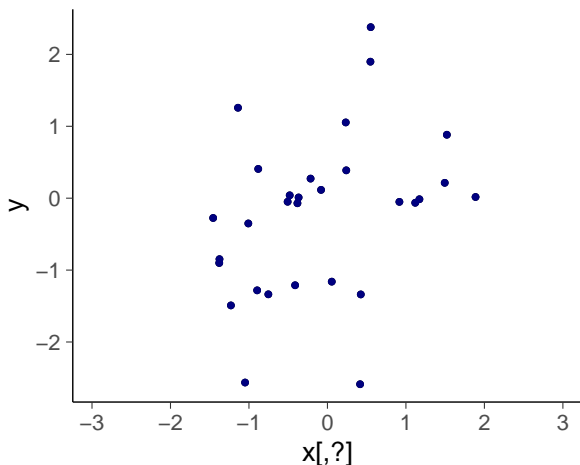


## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

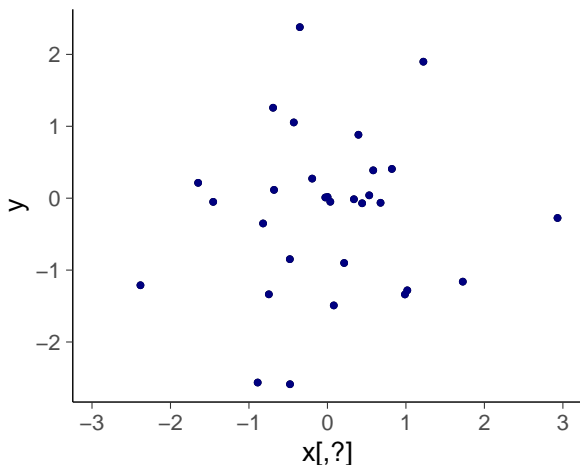


## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

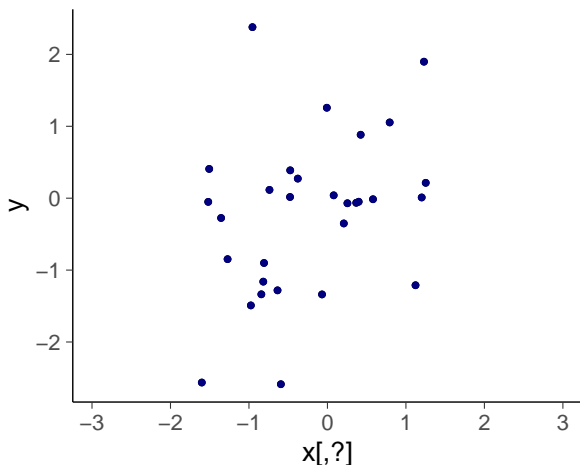


## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

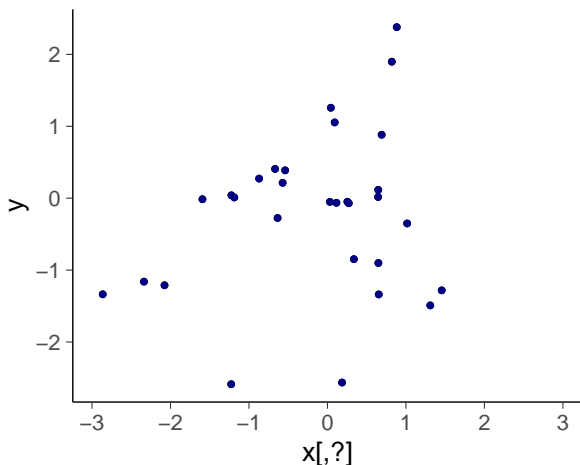


## Example: Simulated regression

$$\begin{array}{lll} f \sim N(0, 1), & x_j | f \sim N(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim N(f, 1) & x_j | f \sim N(0, 1), & j = 151, \dots, 500. \end{array}$$

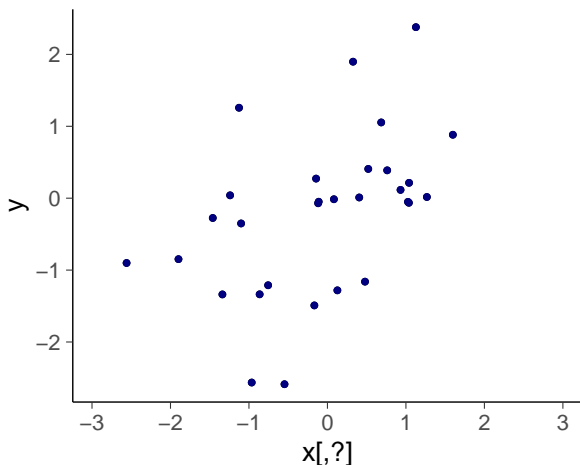

## Example: Simulated regression


$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

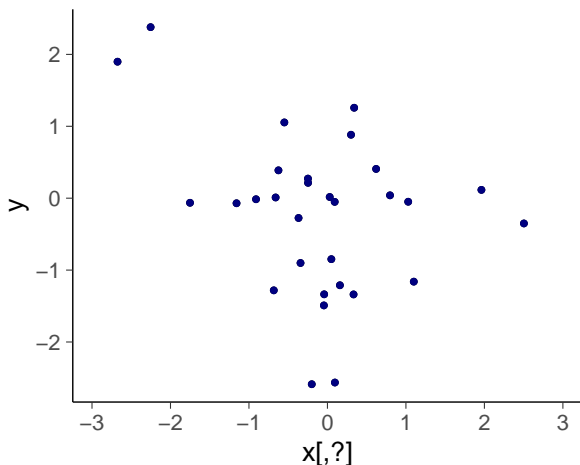




## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

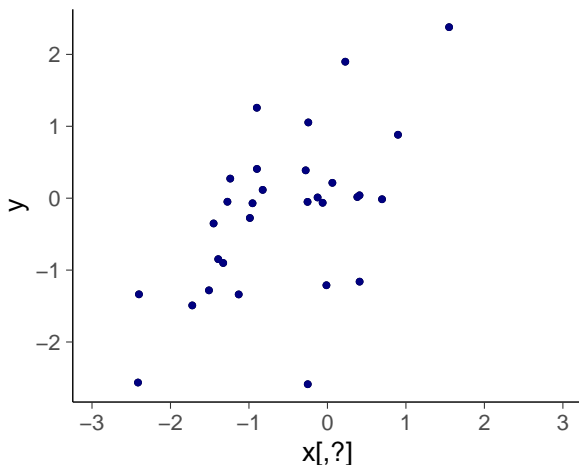


## Example: Simulated regression

$$\begin{array}{lll} f \sim \mathcal{N}(0, 1), & x_j | f \sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j = 1, \dots, 150, \\ y | f \sim \mathcal{N}(f, 1) & x_j | f \sim \mathcal{N}(0, 1), & j = 151, \dots, 500. \end{array}$$

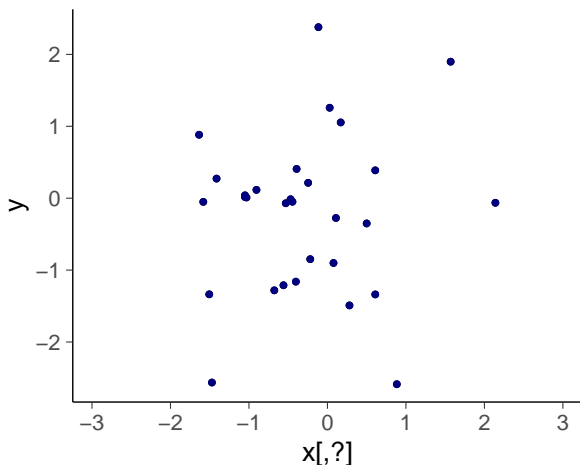


## Example: Individual correlations

$$\begin{aligned} f &\sim N(0, 1), & x_j | f &\sim N(\sqrt{\rho}f, 1 - \rho), & j &= 1, \dots, 150, \\ y | f &\sim N(f, 1) & x_j | f &\sim N(0, 1), & j &= 151, \dots, 500. \end{aligned}$$

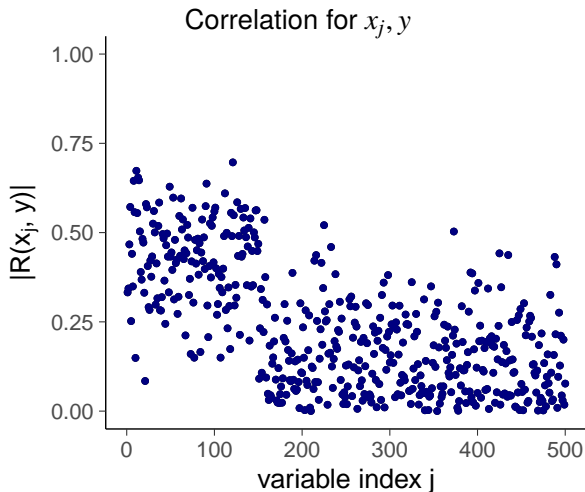


## Example: Individual correlations

$$\begin{aligned} f &\sim \mathcal{N}(0, 1), & x_j | f &\sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j &= 1, \dots, 150, \\ y | f &\sim \mathcal{N}(f, 1) & x_j | f &\sim \mathcal{N}(0, 1), & j &= 151, \dots, 500. \end{aligned}$$

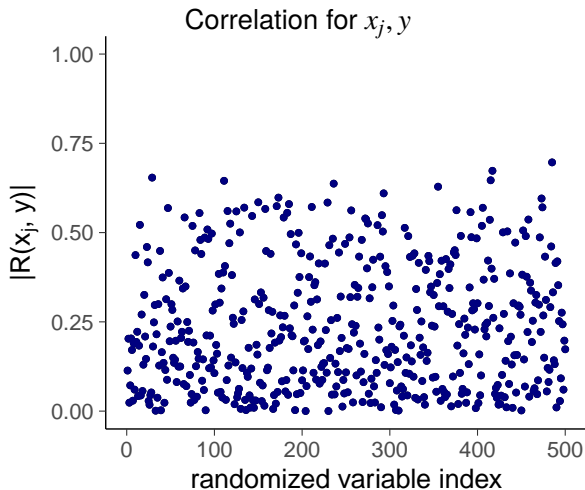

## Example: Individual correlations


$$\begin{aligned} f &\sim N(0, 1), & x_j | f &\sim N(\sqrt{\rho}f, 1 - \rho), & j &= 1, \dots, 150, \\ y | f &\sim N(f, 1) & x_j | f &\sim N(0, 1), & j &= 151, \dots, 500. \end{aligned}$$

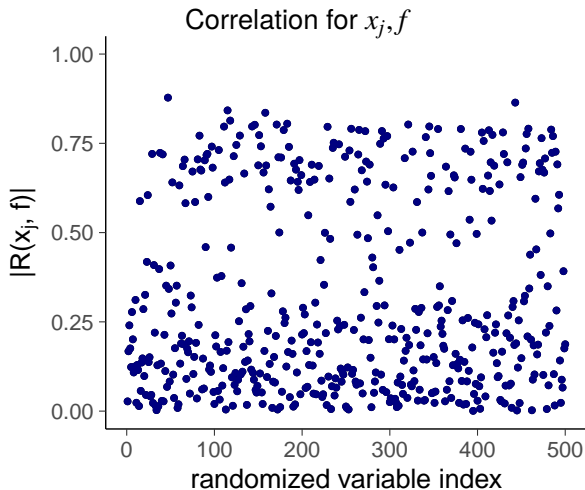


## Example: Individual correlations

$$\begin{aligned} f &\sim \mathcal{N}(0, 1), & x_j | f &\sim \mathcal{N}(\sqrt{\rho}f, 1 - \rho), & j &= 1, \dots, 150, \\ y | f &\sim \mathcal{N}(f, 1) & x_j | f &\sim \mathcal{N}(0, 1), & j &= 151, \dots, 500. \end{aligned}$$

Correlation for  $x_j, f_*$  ( $f_* = \text{PCA} + \text{linear regression}$ )

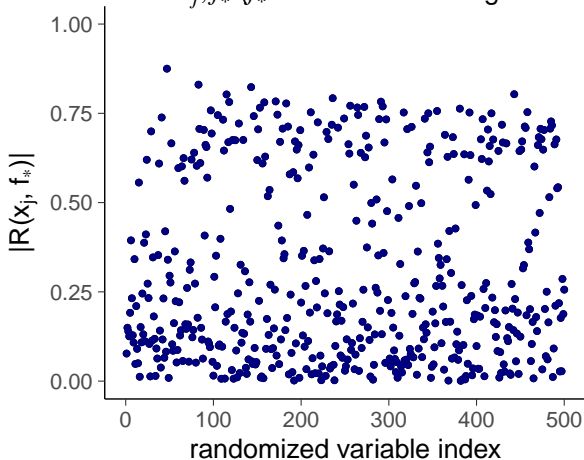


# Knowing the latent values would help

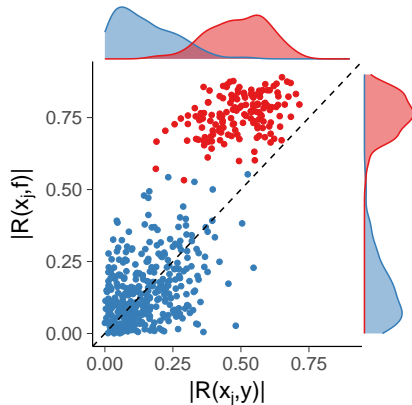

irrelevant  $x_j$ , relevant  $x_j$   
A) Sample correlation with  $y$  vs. sample correlation with  $f$

# Estimating the latent values with a reference model helps

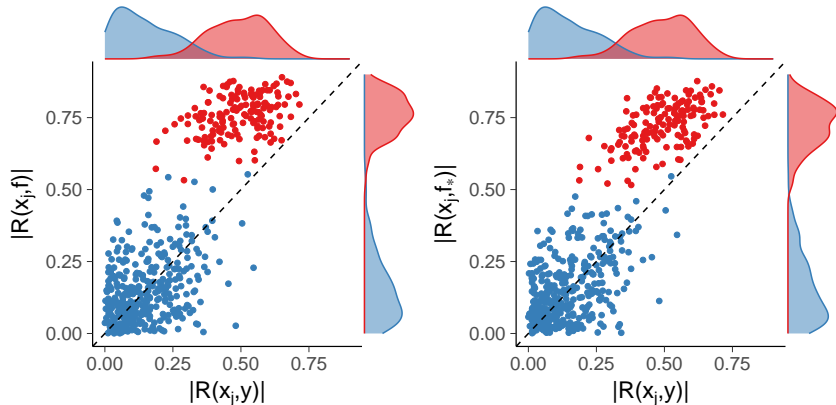

irrelevant  $x_j$ , relevant  $x_j$

A) Sample correlation with  $y$  vs. sample correlation with  $f$

B) Sample correlation with  $y$  vs. sample correlation with  $f_*$

$f_*$  = linear regression fit with 3 principal components



# Bayesian justification

- Theory says to integrate over all the uncertainties
  - build a rich model
  - make model checking etc.
  - this model can be the reference model

# Projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible

# Projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible
- Example constraints
  - $q(\theta)$  can have only point mass at some  $\theta_0 \Rightarrow$  “Optimal point estimates”



# Projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible
- Example constraints
  - $q(\theta)$  can have only point mass at some  $\theta_0 \Rightarrow$  “Optimal point estimates”
  - Some covariates must have exactly zero regression coefficient  $\Rightarrow$  “Which covariates can be discarded”

# Projection



- Replace full posterior  $p(\theta | D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible
- Example constraints
  - $q(\theta)$  can have only point mass at some  $\theta_0 \Rightarrow$  “Optimal point estimates”
  - Some covariates must have exactly zero regression coefficient  $\Rightarrow$  “Which covariates can be discarded”
  - Much simpler model  $\Rightarrow$  “Easier explanation”

# Logistic regression with two covariates

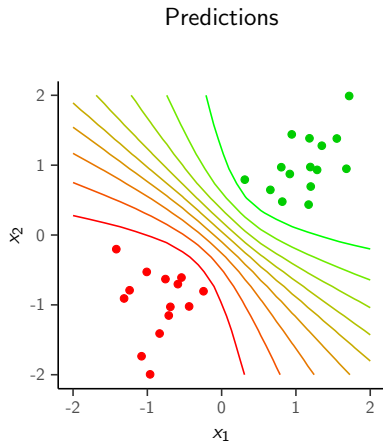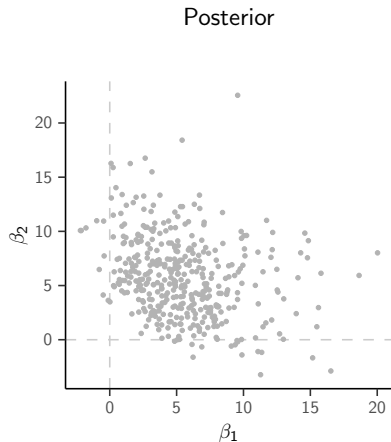



Full posterior for  $\beta_1$  and  $\beta_2$  and contours of predicted class probability

# Logistic regression with two covariates

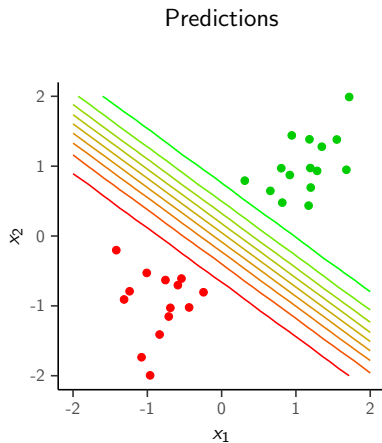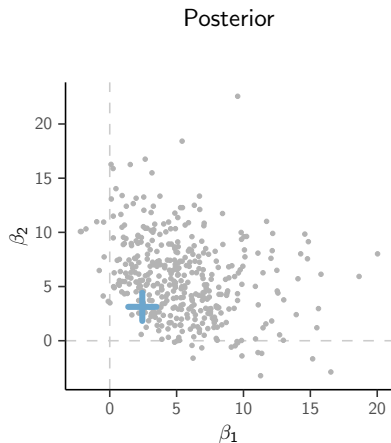

Projected point estimates for  $\beta_1$  and  $\beta_2$


# Logistic regression with two covariates

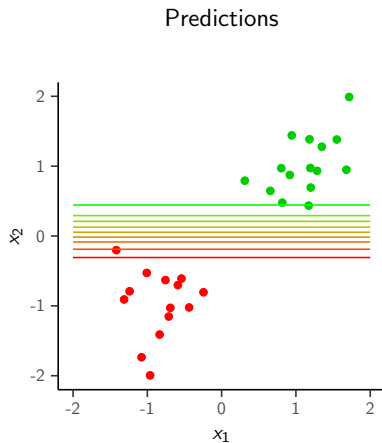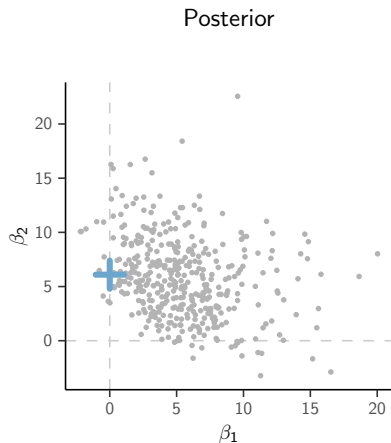

Projected point estimates, constraint  $\beta_1 = 0$





# Logistic regression with two covariates

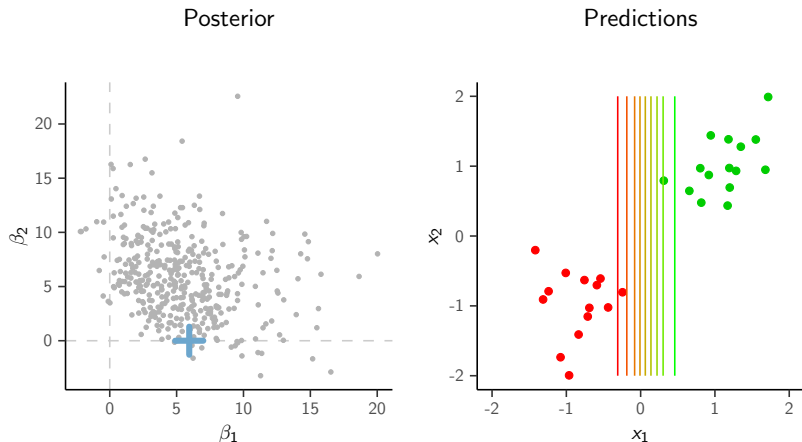


Projected point estimates, constraint  $\beta_2 = 0$

# Logistic regression with two covariates

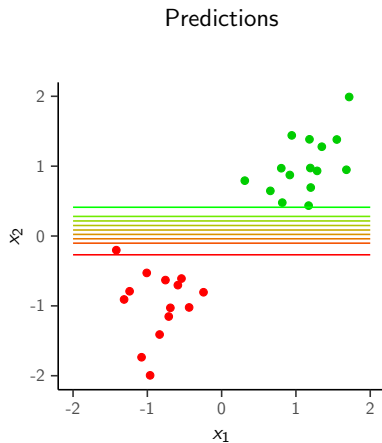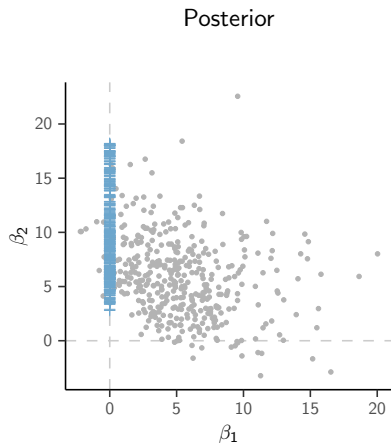

Draw-by-draw projection, constraint  $\beta_1 = 0$

# Logistic regression with two covariates

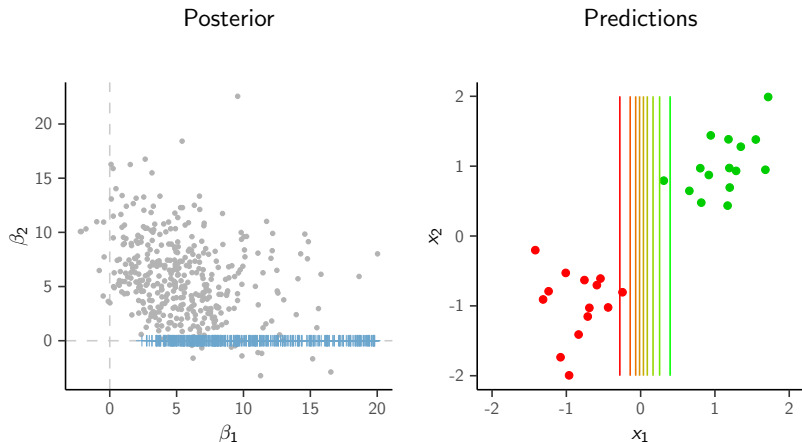

Draw-by-draw projection, constraint  $\beta_2 = 0$

# Predictive projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible

# Predictive projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible
- As the full posterior  $p(\theta \mid D)$  is projected to  $q(\theta)$ 
  - the prior is also projected and there is no need to define priors for submodels separately

# Predictive projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible
- As the full posterior  $p(\theta \mid D)$  is projected to  $q(\theta)$ 
  - the prior is also projected and there is no need to define priors for submodels separately
  - even if we constrain some coefficients to be 0, the predictive inference is conditioned on the information related features contributed to the reference model

# Predictive projection

- Replace full posterior  $p(\theta \mid D)$  with some constrained  $q(\theta)$  so that the *predictive distribution* changes as little as possible
- As the full posterior  $p(\theta \mid D)$  is projected to  $q(\theta)$ 
  - the prior is also projected and there is no need to define priors for submodels separately
  - even if we constrain some coefficients to be 0, the predictive inference is conditioned on the information related features contributed to the reference model
  - solves the problem of how to do the inference after the model selection

## Searching for submodels

- We may not be able to evaluate the  $2^p$  combinations



## Searching for submodels

- We may not be able to evaluate the  $2^p$  combinations
- Search heuristics, e.g.
  - Monte Carlo search
  - Forward search
  - $L_1$ -penalization (as in Lasso)

## Searching for submodels

- We may not be able to evaluate the  $2^p$  combinations
- Search heuristics, e.g.
  - Monte Carlo search
  - Forward search
  - $L_1$ -penalization (as in Lasso)
- For a given model size, choose feature combination with minimal projective loss


## Searching for submodels

- We may not be able to evaluate the  $2^p$  combinations
- Search heuristics, e.g.
  - Monte Carlo search
  - Forward search
  - $L_1$ -penalization (as in Lasso)
- For a given model size, choose feature combination with minimal projective loss
- Use cross-validation to select the appropriate model size
  - In some cases like,  $p \gg n$ , we need to cross-validate over the search paths

# Projective selection vs. Lasso

Same simulated regression data as before,


$$n = 50, p = 500, p_{\text{rel}} = 150, \rho = 0.5$$

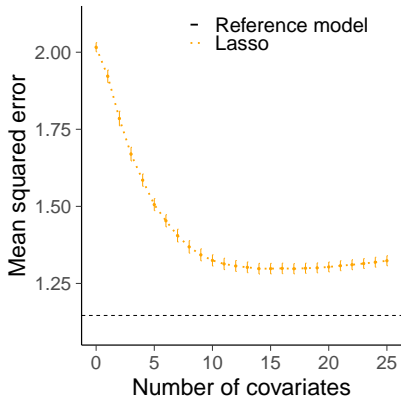

# Projective selection vs. Lasso

Same simulated regression data as before,


$$n = 50, p = 500, p_{\text{rel}} = 150, \rho = 0.5$$

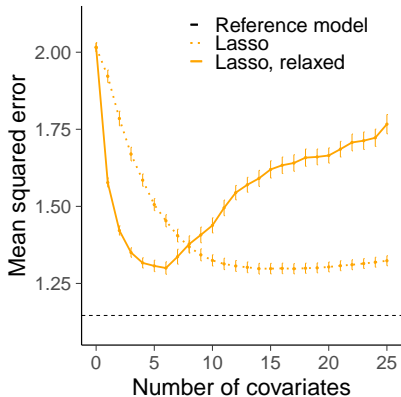

# Projective selection vs. Lasso

Same simulated regression data as before,



$$n = 50, p = 500, p_{\text{rel}} = 150, \rho = 0.5$$

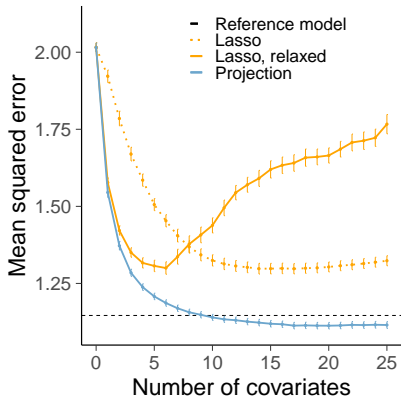

# Projective selection vs. Lasso

Same simulated regression data as before,

$$n = 50, p = 500, p_{\text{rel}} = 150, \rho = 0.5$$

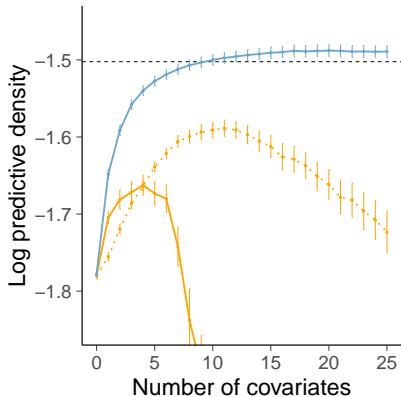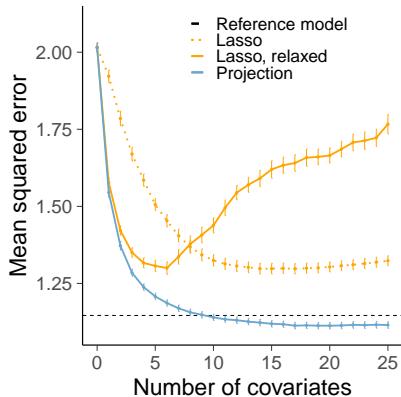


## Bodyfat: small $p$ example of projection predictive

Predict bodyfat percentage. The reference value is obtained by immersing person in water.  $n = 251$ .




# Bodyfat: small $p$ example of projection predictive

Predict bodyfat percentage. The reference value is obtained by immersing person in water.  $n = 251$ .

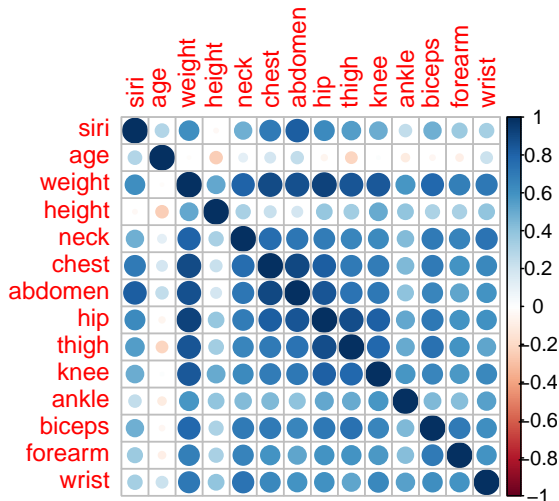


# Bodyfat

Marginal posteriors of coefficients

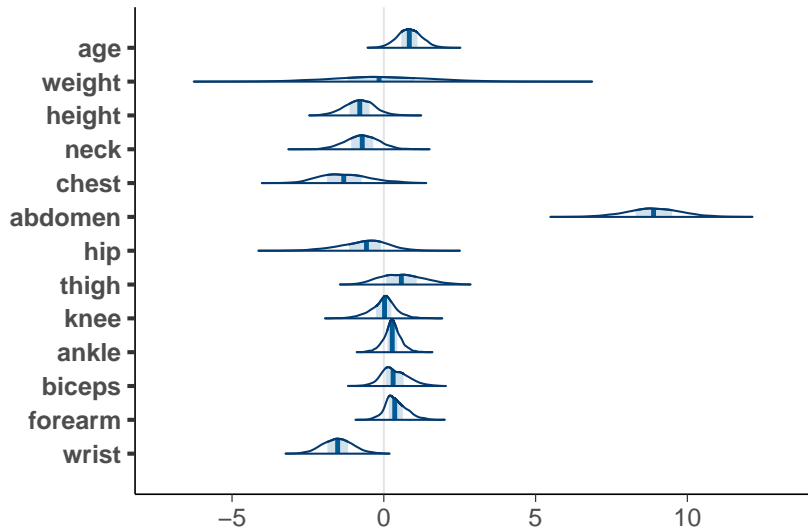


# Bodyfat

Bivariate marginal of weight and height

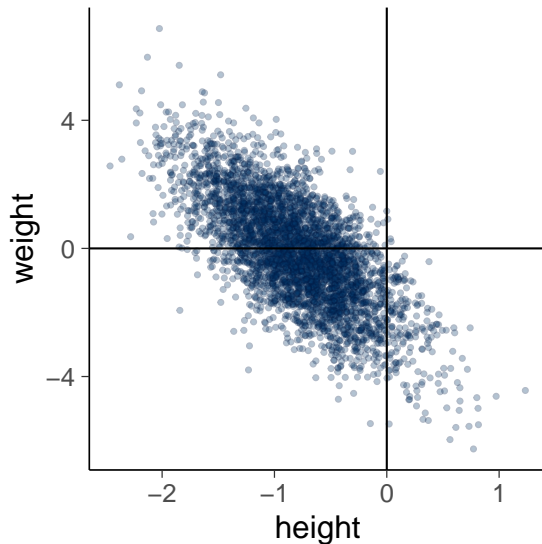


# Bodyfat

The predictive performance of the full and submodels

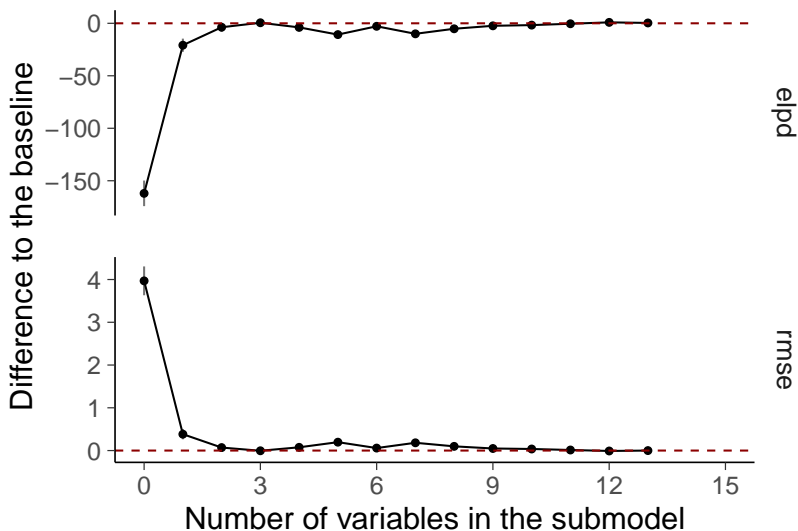

# Bodyfat

Marginals of the reference and projected posterior

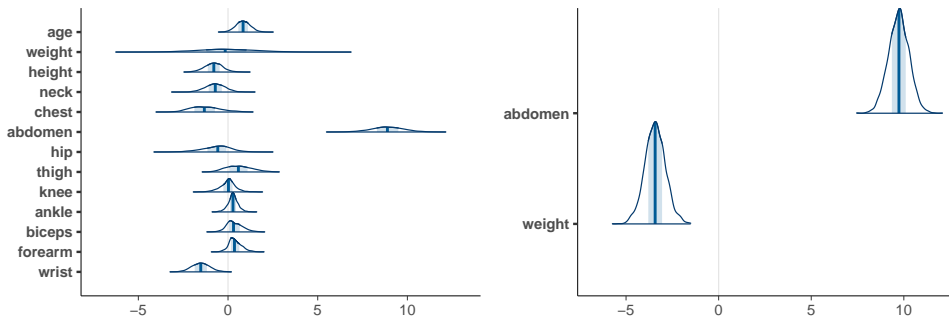

## Predictive performance vs. selected variables


- The initial aim: find the minimal set of variables providing similar predictive performance as the reference model

## Predictive performance vs. selected variables

- The initial aim: find the minimal set of variables providing similar predictive performance as the reference model
- Some keep asking can it find the true variables

# Predictive performance vs. selected variables


- The initial aim: find the minimal set of variables providing similar predictive performance as the reference model
- Some keep asking can it find the true variables
  - What do you mean by true variables?

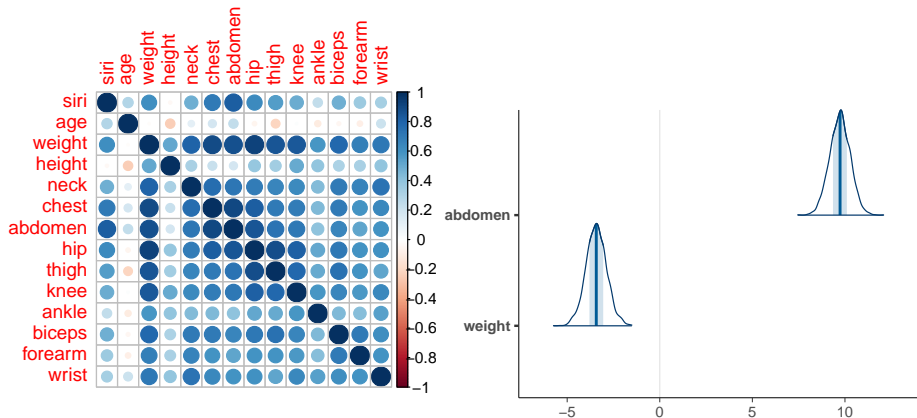




# Variability under data perturbation

Comparing projection predictive variable selection (projpred) and stepwise maximum likelihood over bootstrapped datasets

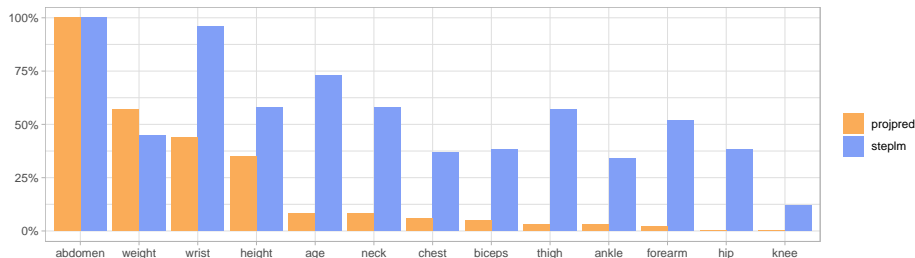

# Variability under data perturbation

Comparing projection predictive variable selection (projpred) and stepwise maximum likelihood over bootstrapped datasets

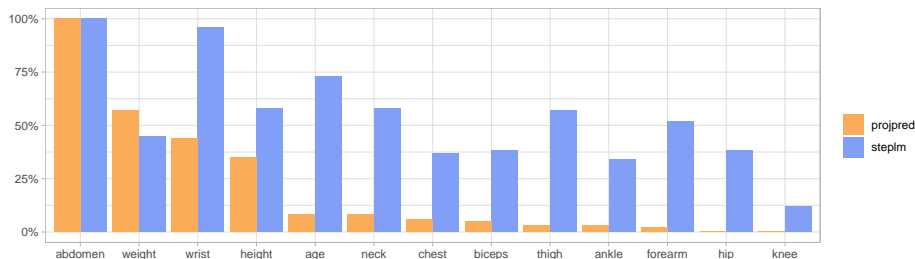

M	projpred	Freq %	stepml	Freq %
1	abdom., weight	39	abdom., age, forearm, height, hip, neck, thigh, wrist	4
2	abdom., wrist	10	abdom., age, chest, forearm, height, neck, thigh, wrist	4
3	abdom., height	10	abdom., forearm, height, neck, wrist	2
4	abdom., height, wrist	9	abdom., forearm, neck, weight, wrist	2
5	abdom., weight, wrist	8	abdom., age, height, hip, thigh, wrist	2
6	abdom., chest, height, wrist	2	abdom., age, height, hip, neck, thigh, wrist	2
7	abdom., biceps, weight, wrist	2	abdom., age, ankle, forearm, height, hip, neck, thigh, wrist	2
8	abdom., height, weight, wrist	2	abdom., age, biceps, chest, height, neck, wrist	2
9	abdom., age, wrist	2	abdom., age, biceps, chest, forearm, height, neck, thigh, wrist	2
10	abdom., age, height, neck, thigh, wrist	2	abdom., age, ankle, biceps, weight, wrist	2

# Variability under data perturbation

Comparing projection predictive variable selection (projpred) and stepwise maximum likelihood over bootstrapped datasets



- Reduced variability, but in case of noisy finite data, there will be some variability under data perturbation

# Variability under data perturbation

Comparing projection predictive variable selection (projpred) and stepwise maximum likelihood over bootstrapped datasets



- Reduced variability, but in case of noisy finite data, there will be some variability under data perturbation
- projpred uses
  - Bayesian inference for the reference
  - The reference model
  - Projection for submodel inference

# Variability under data perturbation

Comparing projection predictive variable selection (projpred) and stepwise maximum likelihood over bootstrapped datasets



- Reduced variability, but in case of noisy finite data, there will be some variability under data perturbation
- projpred uses
  - Bayesian inference for the reference
  - The reference model
  - Projection for submodel inference

# Multilevel regression and GAMMs

- projpred supports also hierarchical models in brms  
Catalina, Bürkner, and Vehtari (2022). Projection predictive inference for generalized linear and additive multilevel models. *Proceedings of the 24th International Conference on Artificial Intelligence and Statistics (AISTATS)*, PMLR 151:4446–4461.  
<https://proceedings.mlr.press/v151/catalina22a.html>

# Scaling

- So far the biggest number of variables we've tested is 22K
  - 96s for creating a reference model
  - 14s for projection predictive variable selection

# Intro paper and brms and rstanarm + projpred examples

- McLatchie, Rögnvaldsson, Weber, and Aki Vehtari (2024). Advances in projection predictive inference. *Statistical Science*.

<https://arxiv.org/abs/2306.15581>

- <https://mc-stan.org/projpred/articles/projpred.html>
- <https://users.aalto.fi/~ave/casestudies.html>

- Fast and often sufficient if  $n \gg p$

```
varsel <- cv_varsel(fit, method='forward', cv_method='loo',  
                   validate_search=FALSE)
```

- Slower but needed if not  $n \gg p$

```
varsel <- cv_varsel(fit, method='forward', cv_method='kfold', K=10,  
                   validate_search=TRUE)
```

- If  $p$  is very big

```
varsel <- cv_varsel(fit, method='L1', cv_method='kfold', K=5,  
                   validate_search=TRUE)
```



# Bayesian Python packages

- PPLs
  - Stan (via CmdStanPy)
  - PyMC
  - NumPyro, ..., etc
- Workflow packages
  - ArviZ, MCMC diagnostics, model checking, model comparison, plotting, prior-sensitivity...
  - Bambi, BAYesian Model-Building Interface
  - Kulprit, projective inference (still under development)

<https://link-to-demo>