


ASE Exercise 3


Task 1

Completing the following task requires to import some existing code first.


1. Go to the RWTHmoodle learning room and download “211025_Exercise_3_Base.zip” file from “learning materials -> exercise”.
2. Start your eclipse and create a new project “Exercise Three”
3. Extract the downloaded zip-file and copy the content into your new project. The subsequent image script shows what you need to do.

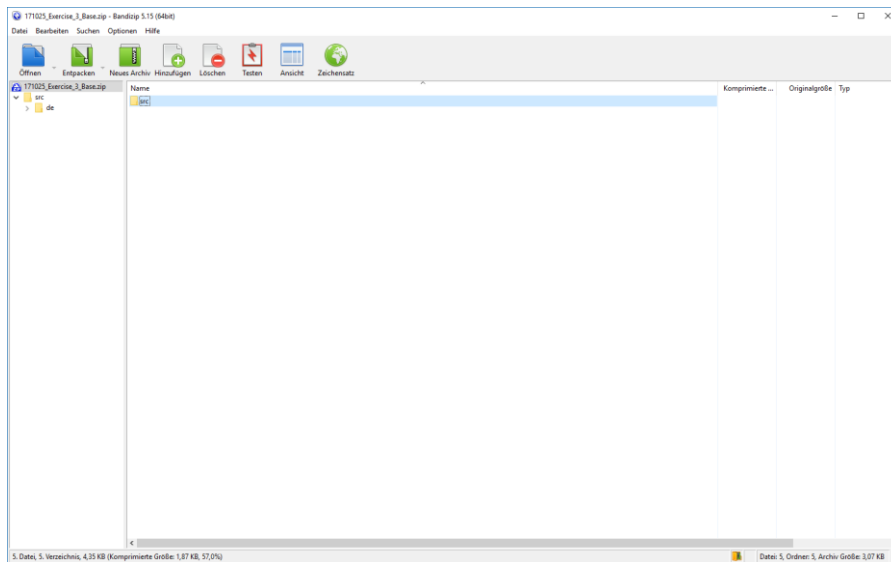


Picture 1: Content of zip-file (src folder and subfolders)

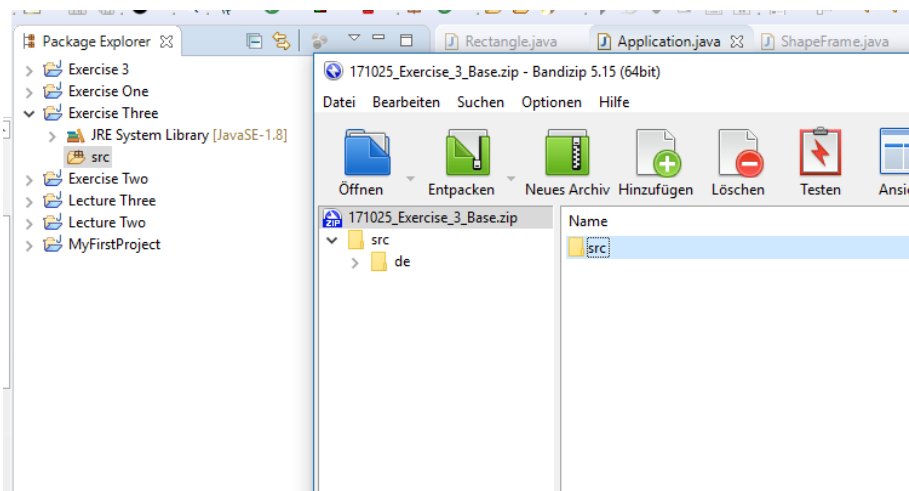

Picture 2: Copy content of zip-file into src folder of your project (you can use drag-and-drop)

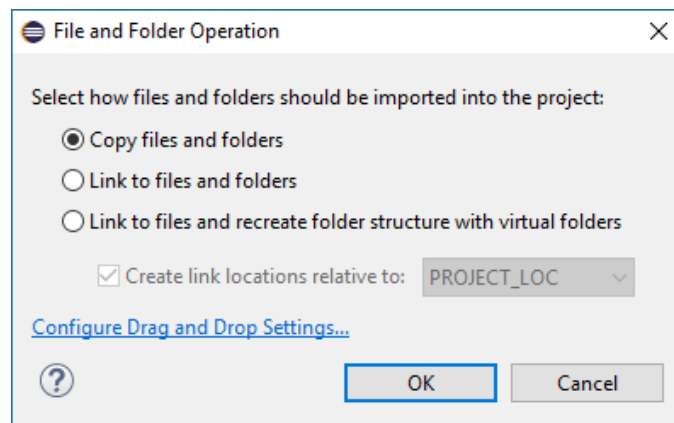


Picture 3: In the subsequent dialog select the first option

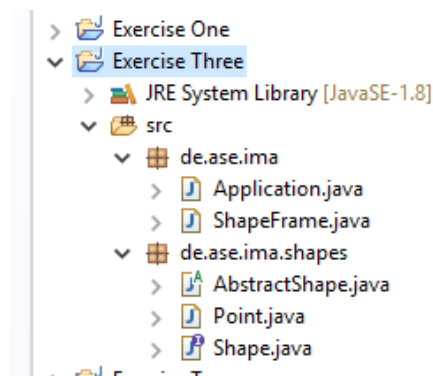

Picture 4: After copying the files, it should look like this screenshot

Look into the different classes of the package `de.ase.ima.shapes`. Afterwards try to understand the class `Application`. The application first initializes a list of shapes and second uses the implementation of `ShapeFrame` (which you do not need to understand) to draw the different shapes in a GUI.

We define a shape as a list of points. The first point defines the starting point, so that from this point onwards a line is drawn from each point in the list. An example of a shape is depicted in the following picture.

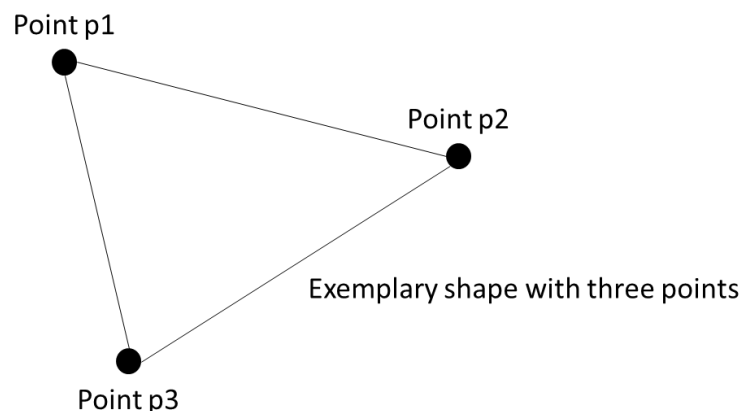


Picture 5: A shape defined by three points $\{p1, p2, p3\}$

Furthermore, a shape has a color and a fill-state.

- a. Create a new class `Rectangle` in the package `de.ase.ima.shapes`. This class extends the class `AbstractShape`, which provides you with all the base implementations to define a shape. Next, implement two constructors:

- (1) `public Rectangle(Point lowerLeft, Point upperRight, Color color, boolean filled)`
- (2) `public Rectangle(int x1, int y1, int x2, int y2, Color color, boolean filled)`

Both has to define a rectangle. Thereby, a rectangle consists of four points (see Picture 6). The constructors therefore has to add the needed point to the inherited shape by using the corresponding `addPoint`-Method. Further, the given color and the fill-status has to be set using the corresponding inherited setters.

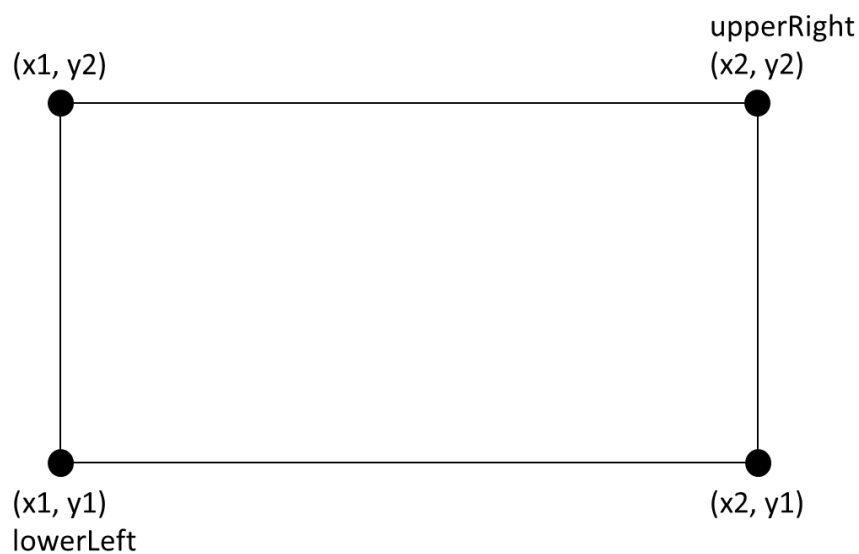


Picture 6: Definition of a rectangle

Extend the implementation of your `Application`, so that you add one `Rectangle` (see Picture 7).

```
1 package your.name.exercise;
2
3 import java.awt.Color;
4
5
6
7
8
9
10 public class Application {
11
12     public static void main(String[] args) {
13
14         // a list of shapes that have to be drawn
15         List<Shape> shapes = new ArrayList<>();
16
17         shapes.add(new Rectangle(100, 100, 300, 300, Color.RED, true));
18
19         // create the frame and draw the shapes
20         ShapeFrame frame = new ShapeFrame();
21         frame.drawShapes(shapes);
22         frame.setVisible(true);
23     }
24
25 }
```

Picture 7: Extension of the `Application` implementation

Run your code. If your implementation is correct, it should look like depicted in the following picture.

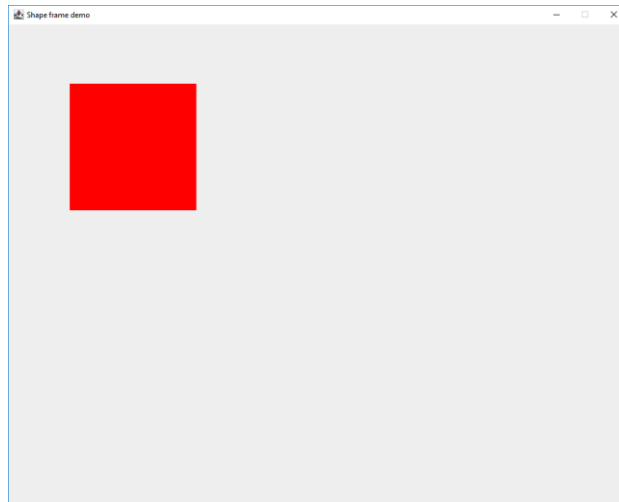


Picture 8: Generated window with rectangle

- b. Create a new class `Triangle` in the package `de.ase.ima.shapes`. This class also extends the class `AbstractShape`. Next, implement one constructor:

```
(1) public Triangle(Point p1, Point p2, Point p3, Color color,  
    boolean filled)
```

Extend your application, so that besides the rectangle, a triangle is drawn as depicted in Picture 9.

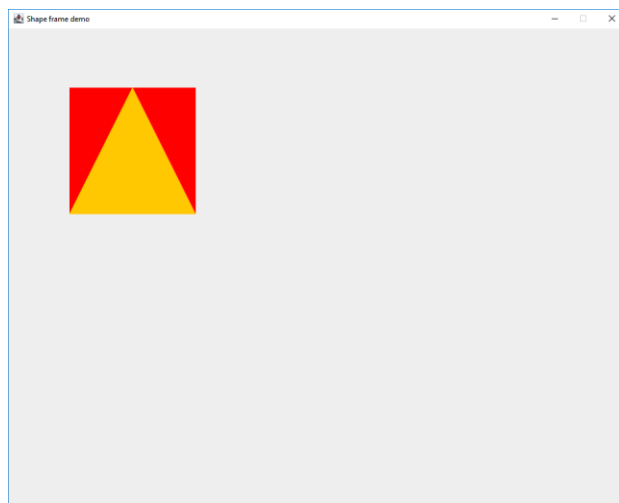

Picture 9: Generated window with rectangle and triangle

Task 2

Extend your application, so that by using rectangles and triangles in different colors the picture that looks like picture 10 is drawn to the screen.



Picture 10: Generated window with rectangles and triangle

- c. Create a class `Circle` in the package `de.ase.ima.shapes` that accepts a center `Point`, an `int` radius, a `Color` and a boolean filled parameter as follows:

```
public Circle(Point point, int radius, Color color, boolean  
              filled)
```

- Calculate the points in the perimeter of the circle programmatically. You can use the following lines of code to generate these points:

```
int x = point.getX() + (int)(radius * Math.cos(Math.toRadians(angle)));  
int y = point.getY() + (int)(radius * Math.sin(Math.toRadians(angle)));
```

- Replace the windows of the house using circles. The final product should look like Picture 11:



Picture 111: Generated window with rectangles, circles and triangle


- d. Extend your class `Point` by adding a method to calculate the distance to another point. The signature and return type of the method should be:

```
public double distance(Point p)
```

- e. Extend your class `AbstractShape` by the following method:

```
public double calculatePerimeter()
```

Next, implement this method by summing the distances between the points. Remember to add the distance between the last and the first point. If your implementation is correct, the application should show you the calculated perimeter for each shape (after it has been drawn) – see Picture 12.

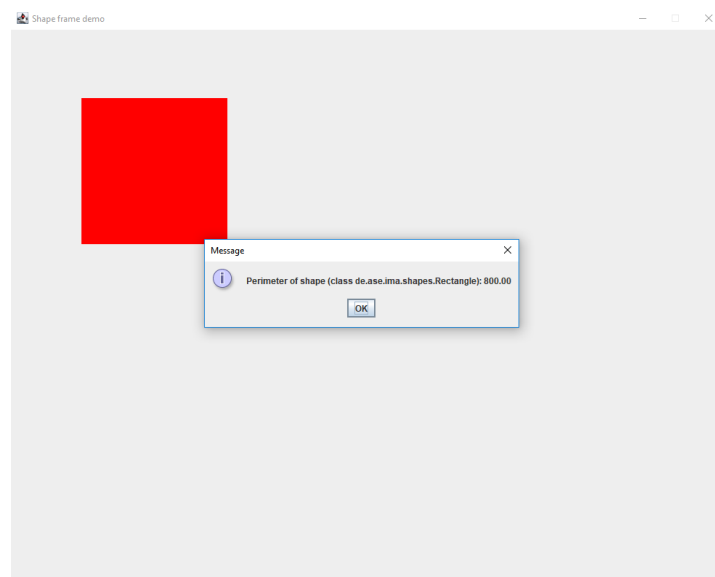

Picture 12: Generated window with rectangle and calculated perimeter