(a) `Prime`: Occupy the cache set
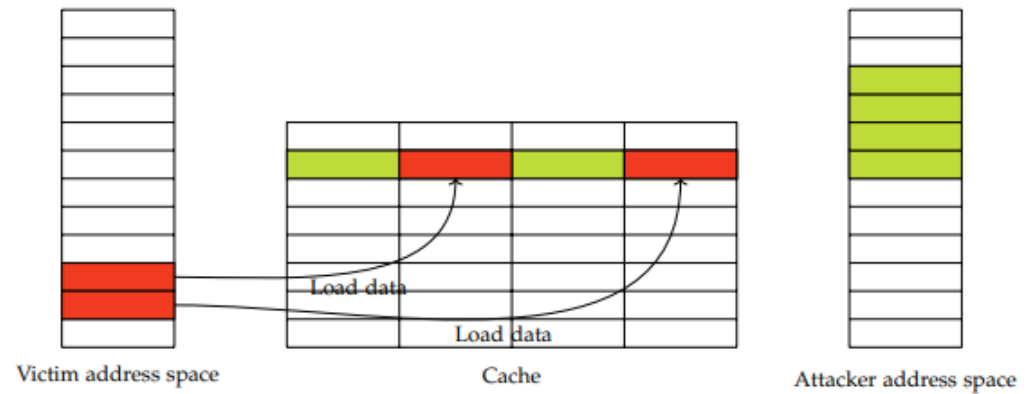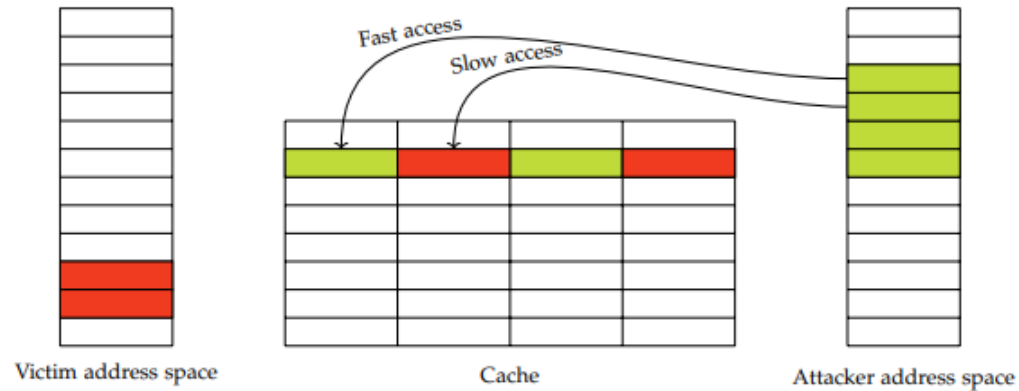
(b) Schedule the victim's program that accesses data in the same cache set.

(c) `Probe`: Determine cache set occupation.