



XDR packets over TCP




raw byte I/O

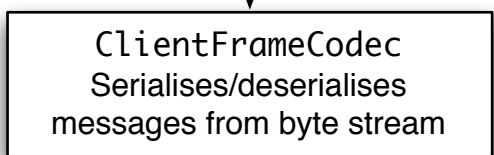


generates

sent to

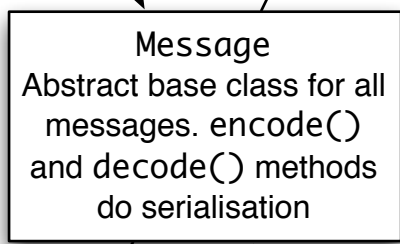

uses

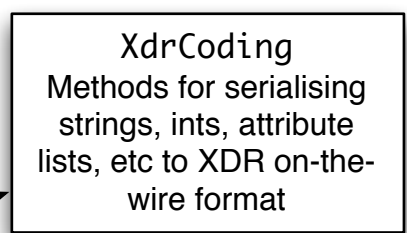


example



sent to


sends

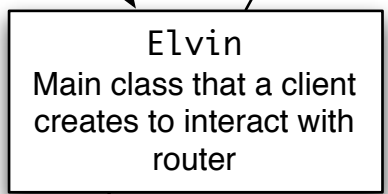

subscribes to notifications

sends notification

callbacks



Thread notes: Elvin class client has a mutex that all public API calls acquire. It maintains a thread that executes callbacks, which also acquires this mutex before calling into client code. This avoids deadlocks and allows client to execute synchronous calls such as subscribe() and close() from callbacks

