

DAT602 Project Report

Submitted By: Abhimanu Saharan, NMIT ID: 13497164

Submitted To: Todd Chochrane

Recap	2
Game Description	2
Storyboards	3
Player Registration	3
Player Selection/ Game Confirmation	5
Create New Game	6
Admin Tools	7
Update Player Details Form	8
GameGrid Form	9
CRUD TABLE	10
LOGICAL ERD	12
Players Table	12
GameSession Table	13
Tile Table	13
Message Table	13
SQL Procedures and CRUD Operations:	14
Overview of CRUD Procedures:	14
ACID	15
Tests	16
Milestone 3 : GUI	17
GUI and database connection	17
Grid	18

Recap

Due to the lack of details in Milestone 1, I've included the storyboards with more details, a new CRUD table and the ERD diagram in this report.

Game Description




The players roll the dice by clicking on the Dice Button which generates a random number between 1 to 6.

The player's position on the board (10*10 grid) changes by the number generated on rolling the dice. The player who reaches the last grid (10x,10y) first wins the game.

The board has some boxes which have snakes, reaching upon which the player has to go down the defined number of boxes. Similarly few boxes have ladders, upon reaching which, the player can move up the grid.

Storyboards

Player Registration

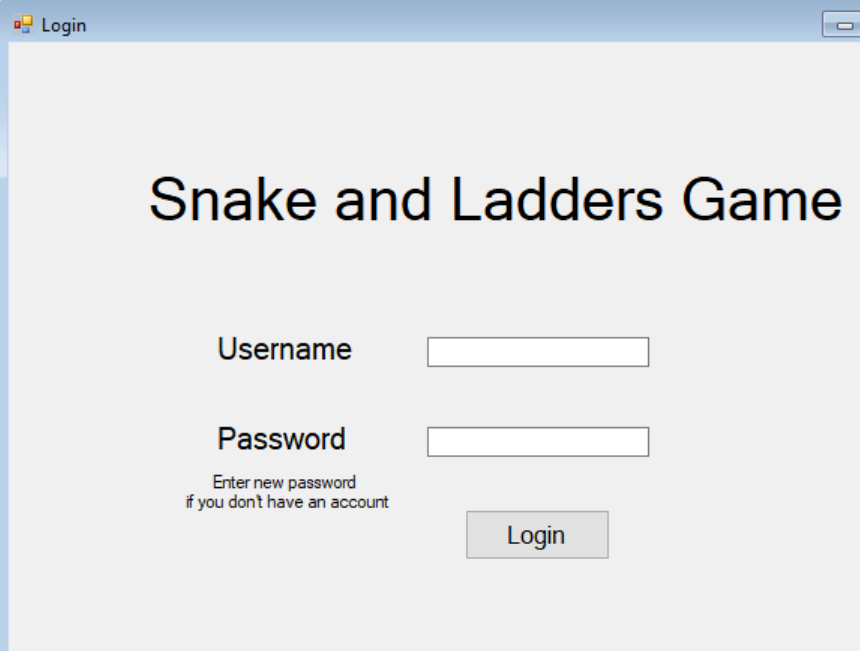

A screenshot of a login window titled "Login". The window has a light gray background. At the top, the title bar says "Login". The main content area has the title "Snake and Ladders Game" in a large, bold, black font. Below the title, there are two input fields: "Username" and "Password". The "Password" field has a small text hint below it that says "Enter new password if you don't have an account". Below the input fields is a "Login" button.


The game starts with the login screen.

If the player is already registered they can login using their password. If their password is wrong the following screen appears:




A screenshot of the login window with an "Unsuccessful" dialog box overlaid. The dialog box has a title bar that says "Unsuccessful" and a close button (X). The text inside the dialog box says "Login Attempts Left: 3" and has an "OK" button. The background login screen is partially obscured by the dialog box. The "Username" field has the text "av" and the "Password" field has the text "A4pppp".

If they are a new user the following screen appears:

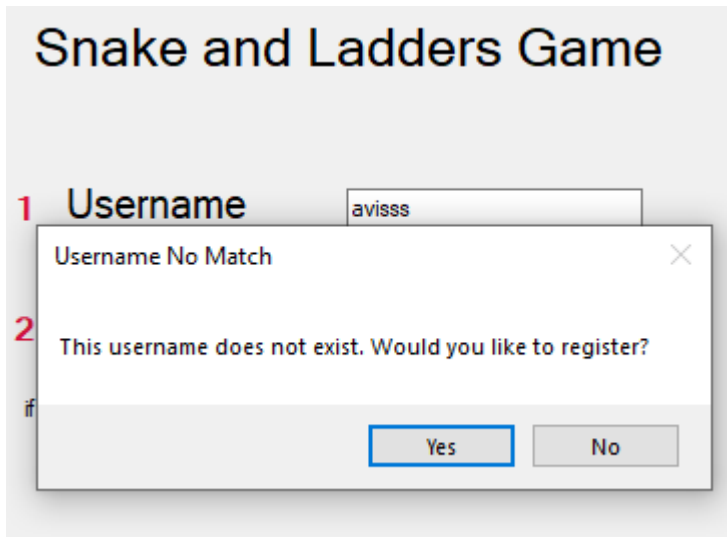

If the user clicks no, they stay on Login Screen but if they press yes, a new user is created and the following message box is displayed:

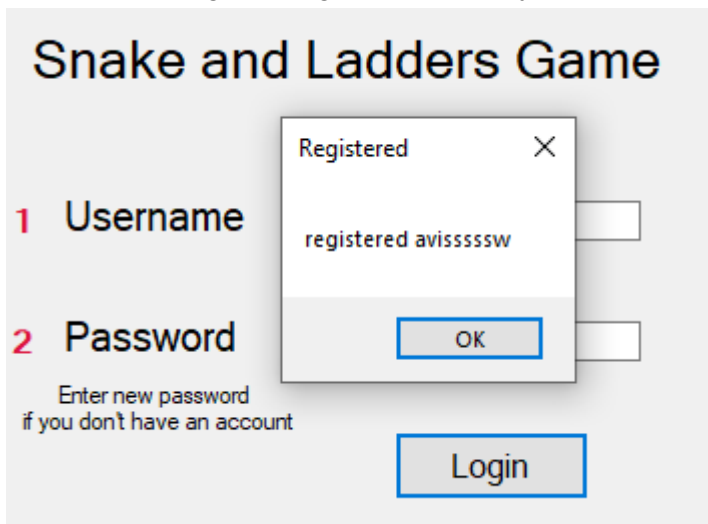

After they click OK they are taken to the '[Player Selection](#)' form.

Player Selection/ Game Confirmation

The interface consists of two side-by-side panels. The left panel, titled 'List of Active Games', has a red number 4 next to its header. It contains a list box with 'My Game' selected, a 'Join This Game' button (labeled 1), and a 'Create New Game' button (labeled 2). The right panel, titled 'Players in the Game', has a red number 5 next to its header. It contains a list box with 'Abhi', 'Todd', and 'avi' (labeled 5), and an 'Admin Panel' button (labeled 3).

Here the active games (games with one or more online players), along with the players in that game are displayed in two list boxes. On selecting a particular game, the players with the same gameld who are online will be listed in the right list.


1. Join Game: To Join the game with selected index.
2. Create New Game Button: Takes to the '[Create New Game Form](#)'.
3. Admin Panel Link: This will only work if the logged in user is admin. Takes the user to the [Admin Form](#).
4. List of games with one or more online players.
5. List of players in the selected game.

On clicking the 'Admin Panel' button [3], if the user is Admin they will be taken to the "[Admin Form](#)" or this message will pop up: If any exception is thrown the message on right will be shown.

The left screenshot shows a message box with the text "Only admins can can access this form" and an "OK" button. The right screenshot shows a message box with the text "There was an error. You can't access this page." and an "OK" button. Both screenshots show the "Games" and "Players in the Game" panels in the background.


On clicking Button 2 the "[Create New Game](#)" form appears (on the next page)

Create New Game

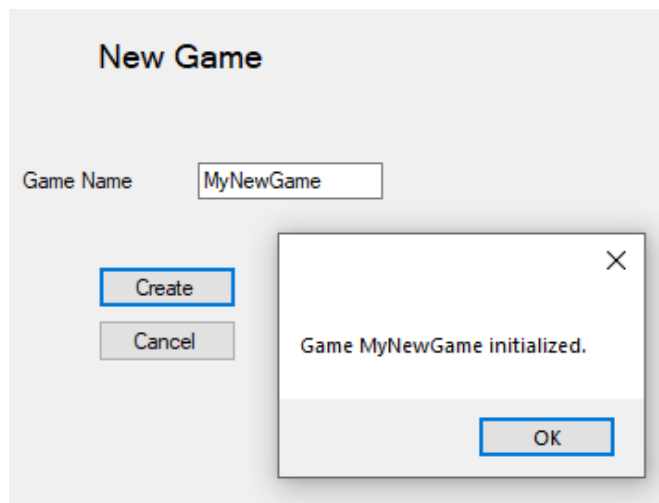


On clicking the create button a new game with no players is created. The players can then join the game.

No two games can have same names, therefore if user enters the name which already exists this error appears:

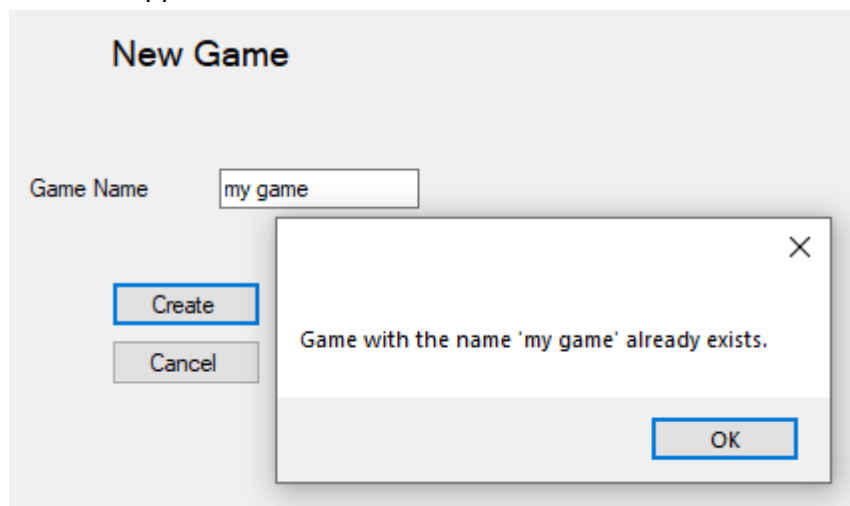

Admin Tools

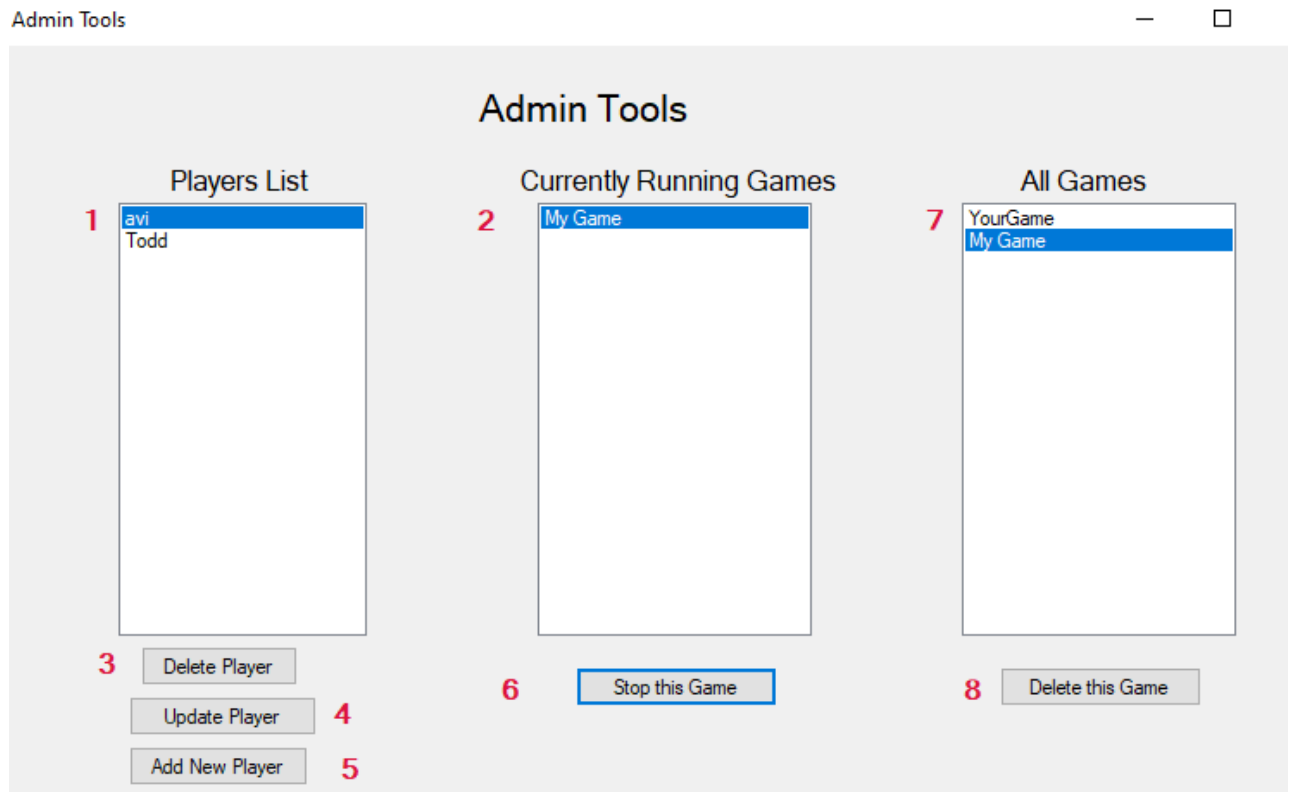

Here the Admin can see the list of all players and can delete them or edit their details. Admin can also delete the games (if any user is playing in that game there active status will be changed to 0 and they will be returned back to login screen)

1. List of usernames of all players.
2. Games with online players.
3. Button to delete selected player
4. Link to the form where the details of the selected player can be updated.
5. Add a new player to database button
6. Button to stop the currently running game.
7. List of all games (Lists 2 and 7 can be combined and a button could be used to filter that list, but I will do that after everything else is done)
8. Delete Button to delete the game. When the game is deleted all players in the game will be logged out, and the game will be deleted.

Clicking 'Update Player' button takes the admin to the '[Update Player Form](#)'

Update Player Details Form

The screenshot shows a form titled "Update Player Details". It contains the following elements:

- 1** Username: A text input field containing "abhimanu".
- 2** Password: An empty text input field.
- 3** Login Attempts: An empty text input field.
- 4** High Score: An empty text input field.
- 5** ☐ Is Admin: A checkbox that is currently unchecked.
- 6** Save: A button.
- 7** Back: A button.

This screenshot shows the same form after the data has been updated. A modal dialog box is displayed in the foreground with the message "Player Data Updated" and an "OK" button. The form fields now contain the following values:

- Username: abhimanu
- Password: A4/
- Login Attempts: 0
- High Score: 500
- 5** ☒ Is Admin: The checkbox is now checked.
- 6** Save: The button is highlighted with a blue border.

1. New Username Field (prefilled with the username selected from previous screen)
2. New Password field. (The user whose password is changed will remain logged in for the present session, even on changing the password.) To make the player leave the game, either delete player or delete Game could be used.
3. Field to reset login attempts
4. To Edit High Score
5. If 'is Admin' is checked the user will become admin from their next login.

Similarly Delete Button [3] deletes the selected player and they will be logged out.

GameGrid Form

Here the user plays the game.

At this moment I've not finished the actual grid, but there is a label which shows the players location in the database [3], and changes the Location Id as users play the game by clicking on 'Roll Dice' button[2]. Also the user can see other players locationID in the list on the right [3].

If the user reaches 100th grid, they win the game, and a message board notifying all the players is displayed, their score updated, and they are taken back to '[select game](#)' screen. .

1

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100

3 Your Location: 1

Other Players Location

100

3

You have won the game! Player moved back to location: 1

OK

2 Roll the Dice

4 Leave Game

Logout 5

1. The Grid will be shown here and different colored grids will represent different players vs opponents.
2. Roll Dice button: Here the user clicks to move the player. A random number between 1 to 6 is generated and added to the current locationID (which is from 1 to 100). If the current location reaches 100, the player wins the game.
3. 'Your Location label': Just temporary to show players location before the grid is functional.
4. Leave Game Button: Clicking this takes the player to 'Select Game' form from where the user can either create new game, join game or can Logout.
5. Logs out the user and returns to Login Screen.
6. 'Other players location' grid: It currently shows other players' locations who are in the same game, but will show the different colored tiles for opponents and the player.
7. Game Grid: Not yet functional but this is where the players location will be presented.

CRUD TABLE

This CRUD table does not include the CRUD operations for all the procedures exclusively but the CRUD operations of higher level procedures.
Eg: 'Admin- update player details' also includes CRUD operation for Admin unlock user account and Admin-Create new user.

	Check User name	Login	Register	List active games	List active players	Create Game	Join Game	Move Player	Admin-Update User details	Admin Delete Player	Admin Delete Game	Leave Game/ Logout	Move Player	Send Chat Message	Retrieve Chat	Logout
Player	R	R	U		R		R, U	R,U	R,U	D		U	R,U			R,U
PlayerID							R	R	R	D			R			
username	R	R	U		R				R,U	D						R
password		R	U						R,U	D						
High Score									R,U	D						
Is Admin									R,U	D						
Is Online		U			R			R		D		U	R			U
Login Attempts		R,U							R, U	D						
Game Id							U			D		U	R			
location								R, U		D			R,U			
GameSession				R		U		R		U	D	U				

GameID						U		R		R,U	D					
GameName				R		U					D					
gameActive				R						R,U	D	R,U				
Tiles						C										
tileID						C										
xPosition						C										
yPosition						C										
hasSnake						C										
hasLadder						C										
Message														U	R	
MessageID														U	R	
GameID														U	R	
PlayerID														U	R	
Message														U	R	


The analysis of CRUD operations is after the ERD diagram, in the '[SQL Procedures and CRUD operations](#)' section.

LOGICAL ERD

My ERD is simple. I am using 4 tables-

1. Player table for player details.
2. Game for saving game sessions so that multiple players can join that game session.
3. Tile table just to initialize the coordinates for grids and the tile number representing those grid coordinates. The table 'Tiles' also contain hasSnake and hasLadder fields that are also static for every tileID. If the user steps on any tile where isSnake is 1, they will be pushed back 7 tiles, and the opposite will happen for isLadder.
4. Messages table which has messageID as primary key. (I was thinking of using GameID and PlayerID together as primary keys, but after doing some queries for chat I stuck to messageID because messageID made it easier to store messages incrementally, and also because come player could be deleted by Admin and it could cause inconsistency in chat messages.)

All the tables are described in more details below:

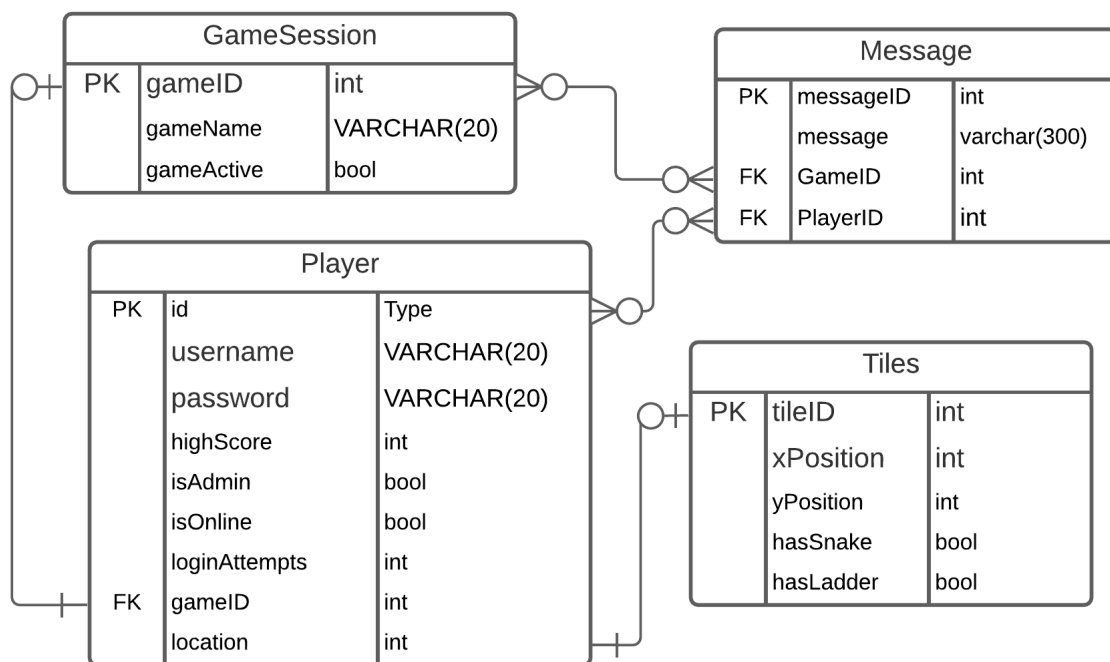

Players Table

The players have their unique ids as primary key and have the following other properties

1. username - unique varchar(20)
2. Password
3. High score
4. isAdmin: To store bool value for if the user is Admin or not
5. isOnline: To store bool value for if the user is online or not
6. loginAttempts: To store the number of login attempts

7. **GameID:** This is assigned to every player after they join or create their own game. Players with the same gameID will share the tile map and be able to chat with each other.

GameSession Table

The game session table has the following fields:

1. **GameID:** Every game session has a separate ID. (Game is same as board)
2. **GameActive:** This is a derived field whose value is calculated at runtime by checking if any of the players in a Game session are online. If they are, then the value of '1' will be stored in the GameActive variable. I chose to include this field because even though it is a derived value, it is used in several places in the game, and calling a procedure to calculate this every time could slow down the execution of other procedures which depend on this value.
3. **GameName:** This is the name of a game- provided by the player who will create a new game.

Tile Table

This table will store static data of grids.

1. **TileID:** This field will contain values from 1 to 100, pointing to the grid position (1,1) to (10,10).
2. **positionX:** For grid position horizontally
3. **positionY:** For grid position vertically
4. **hasSnake:** every tile will have hasSnake value set to either 1 or 0. If the hasSnake value for a tile is true and the user lands on that tile, they will be pushed back 10 tiles.
5. **hasLadder:** same for the hasLadder field. If this field is true for any tileID and the user lands on that tile, they will move 10 tiles ahead.

Message Table

messageID: Autoincrement unique primary key for every message.

Message: Varchar(300) string. I will use the try catch block to create a message box if more than 300 characters are tried to store.

PlayerID: Foreign key to the player who's sending the message.

GameID: Foreign key to the game in which this message is sent.

SQL Procedures and CRUD Operations:

The SQL procedures for all the CRUD operations are [here](#).

There are more procedures than CRUD table operations because the CRUD analysis contains only the high level procedures, but many procedures/functions which are subqueries or used within other procedures are not included in the CRUD table.

Overview of CRUD Procedures:

CheckUsername: Checks if the passed value is a username in the player Table.

Login: This procedure takes two parameters, pusername and pPassword. Then it calls the CheckUsername procedure to check if the username exists and if it exists then the password is checked against the value of password in the player table where usernames match. If the password is the same, a table with message 'pusername logged in' is selected. If the username does not match the user a table with message 'Hi! pUsername, would you like to register' is selected. If the password does not match a message saying the same is selected.

Register: Here also username and password are passed as parameters and the values passed are stored into the players table.

ListActiveGames: This procedure is used to query the games which have one or more players online.

CreateGame: This procedure is called when a user wants to create a new game. This does not take any parameter and an entry into gamesession table with incremental gameId is inserted.

JoinGame: This procedure takes pGameID and pPlayerID as parameters and changes the value of isActive field in GameSession table to true where gameId matches to pID and changes the gameId value of player with pPlayerID to match pGameID.

MovePlayer: This procedure takes pPlayerID, pGameID and pDiceValue as parameters and increments the tileID value of player whose playerId equals to pPlayerID and gameId equals to pGameID by pDiceValue.

Admin_Update_User: This procedure takes the pUsername, pPassword, pLoginAttempts, pLoginAttempts and pHighscore as arguments and updates the corresponding the field the player whose username matches pUserName.

Admin_Delete_Player: This procedure takes pPlayerId as parameter and deletes the row in player tables where ID matches pplayerID.

Admin_Delete_Game: This procedure takes pGameID as parameter and deletes the row where gameID equals pGameID. Because pGameID could be a value of any player's GameID field this deletion also stops their game.

SendChatMessage: This procedure takes pMessage, pUserID, pGameID as parameters and stores these values into a messages table which has an auto incrementing messageID field.

RetrieveChat: This procedure takes pGameID as parameter and selects 10 values sorted in descending order of messageID from message table's message column where gameID is equal to pgameid.

Logout: This procedure takes pUserID as an argument and sets the isOnline value of player which matches ID to pUserID to 0.

ACID

I have used transactions in a procedure where other procedures or other users could modify the data at time when my transactions are run.

Also I've used transactions wherever there were chances of any exceptions getting thrown. Using try catch blocks and transactions I can be assured that no inconsistent or partial data is entered in any table, and I can roll back the transaction to my defined savepoint or completely.

The procedure where the transactions have been most helpful is the login procedure. Here, the username was both updated and retrieved in a series of statements, and the values in those statements (username and password) could be edited by the admins on separate connection, or also new users could be trying to login using the same usernames. The logic for my login procedure was as follows:

1. Look for the submitted username. If the username is found, check the password.
2. If no matching username is found, ask the user if they want to register as a new user.

The problem here was that the admin could delete the existing users or even change their password, while the procedure was executing.

Therefore the use of transaction here is important because if at the end of procedure the username was not updated the transaction can be rolled back and restarted. The default 'Repeatable Read' isolation level was also important here because the uncommitted data from other procedures is not retrieved and the data passed at the start of the procedure can be updated in our own transaction.

My database is reliable even in multiplayer update and retrieval because the data clashing and data loss is prevented using both -logics and transactions wherever required.

MySQL by default fulfills the ACID properties. Eg:

Atomicity: Any BEGIN and END block or UPDATE, INSERT OR DELETE statements if not fully executed are rolled back completely.

Consistency: Referential integrity is maintained by keeping the associated fields linked. Eg: If any field which is the foreign key for other fields can not be deleted until those associated fields are deleted first.

Isolation: The default 'Repeatable Read' isolation level means all the transactions remain isolated until they are committed, i.e- The transactions can not receive data from unfinished transactions.

Durability: This means that the database will keep track of not just completed transactions and data, but also uncommitted or pending transactions. If the connection with the server is disconnected for any reason, those uncommitted transactions will execute on the next connection.

Tests

After milestone 1 I started creating the GUI and linked most of my procedures to the GUI. (Except the actual game grid.) Because the GUI is correctly fetching and updating the data, the procedures seem to be working fine.

However as per the requirements of Milestone two, I have created the Test class which runs all the procedures with passed values.

The test data chosen is based on the data that should generally be passed to the procedures, i.e it does include all the edge cases. (Because most of the validation of the data passed by user or returned by procedures could be done by the GUI. Eg: If any procedure includes any exceptions like buffer overflow or incorrect data types passed, the GUI would first prevent passing of that data by the user.

Therefore, these tests only check if the return values of the procedures are correct, based on data that would generally be passed to these procedures.

The problem I faced during testing is- because the initial namespace for the console app was different from the application in which my DataAccess class (which had methods to fetch data from SQL procedures), I had to include the reference to the DataAccess class in my console app namespace. But even when I did that I had errors that required reference to System.Security.Permissions to pass data between two namespaces. When I solved that, I had an exception thrown by MySql.Data.MySqlClient.Replication.ReplicationManager which I could not understand why. Even copying the data access file to my new namespace did not solve this problem. Therefore finally I just changed my console app's namespace name (which I could have done in the starting.)

Other than that I just had to edit the messages returned by my SQL procedures to provide more details, which would make it easy for testers to understand the test output.

[Here](#) is the link to the Test class , and [here](#) is the console tests project which contains this class.

Milestone 3 : GUI

All the adjustments made to CRUD, ERD and procedures are as in the above pages. The design and storyboards here are explained in more detail and include many more game cases than my [initial milestone one](#).

The [procedures](#) were refined to not just manipulate the data but also provide error messages or just normal messages which could be popped up if the data manipulation does not go as planned and the messages could also help the tester understand the output easily, without having to check the database after any procedure is executed.

In the GUI I included forms which the user is redirected to and from, based on the output from procedures when the player clicks any button. I have used message boxes to show different errors, for example when the user tries to access some form which they are not allowed to- eg. admin form.

The forms layout and actions are described in the pages above. Clicking the form name will take you to that forms description:

[Player Registration](#)- Login and Register functions have the same form with different message boxes based on the data that user inputs.

[Game/Player Selection Form](#): This form has buttons which redirect to 'Create Game' form, the admin form (If the user is admin), and the main game screen of the game which is selected.

[Create Game Form](#): This form allows the user to create a new game, which will be listed in the Game Selection Form and then that game could then be joined by other players.

[Admin Panel](#): This form is accessible only to admins. Here the user can edit other players details and even delete the players, or delete/stop any games.

[Update Player Details Form](#): This form is used by admin to update the selected players details and unlock the player if they got locked out by entering 5 wrong passwords.

GUI and database connection

All the forms described above are fully functional and retrieve and write data to the database. The DataAccess class in my project has methods which take parameters from the forms and pass them to the procedures and also store the returned values.

Those methods are then called by the instances of DataAccess class in different classes and forms, whenever an event is triggered in the form (usually when the user clicks any button or selects an item in the list).

[Here](#) is the link to my DataAccess class, and [here](#) the link to the complete project. (The [console tests](#) project is in a separate folder in the github repository.)

Grid

At this point I am working on the way to present the players into their specific grid location. This report will be updated soon to include the complete working grid.

Currently, the player can click the 'Roll Dice' button in the '[Game Form](#)' and their tile number changes based on their updated value in the database (its value is calculated by adding the random number between 1 to 6 to the players current location. If the updated value reaches above 100, the player wins, a message box is displayed and high score updated.

Currently, the player can see other players tile numbers in the table in the right grid[3], and their own tile number in a label in the Game form- above the grid.[3]

I will get the actual grid working soon, where the player will have a green colored cell and the opponents will have a red colored cell.

The screenshot displays a game interface with the following components:

- Grid (1):** A 10x10 grid of numbers from 1 to 100. The first cell (1) is highlighted in blue.
- Your Location: 1 (3):** A table showing the player's current location and other players' locations.
- Message Box:** A dialog box stating "You have won the game! Player moved back to location: 1" with an "OK" button.
- Buttons:** A "Roll the Dice" button (2), a "Leave Game" button (4), and a "Logout" button (5).

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100

3 Your Location: 1
Other Players Location
100
3

You have won the game! Player moved back to location: 1

OK

2 Roll the Dice

4 Leave Game

Logout 5