


ReformIR — picking reformulations per query

Same bandit machinery as ORE — but the features are reformulations, not signals

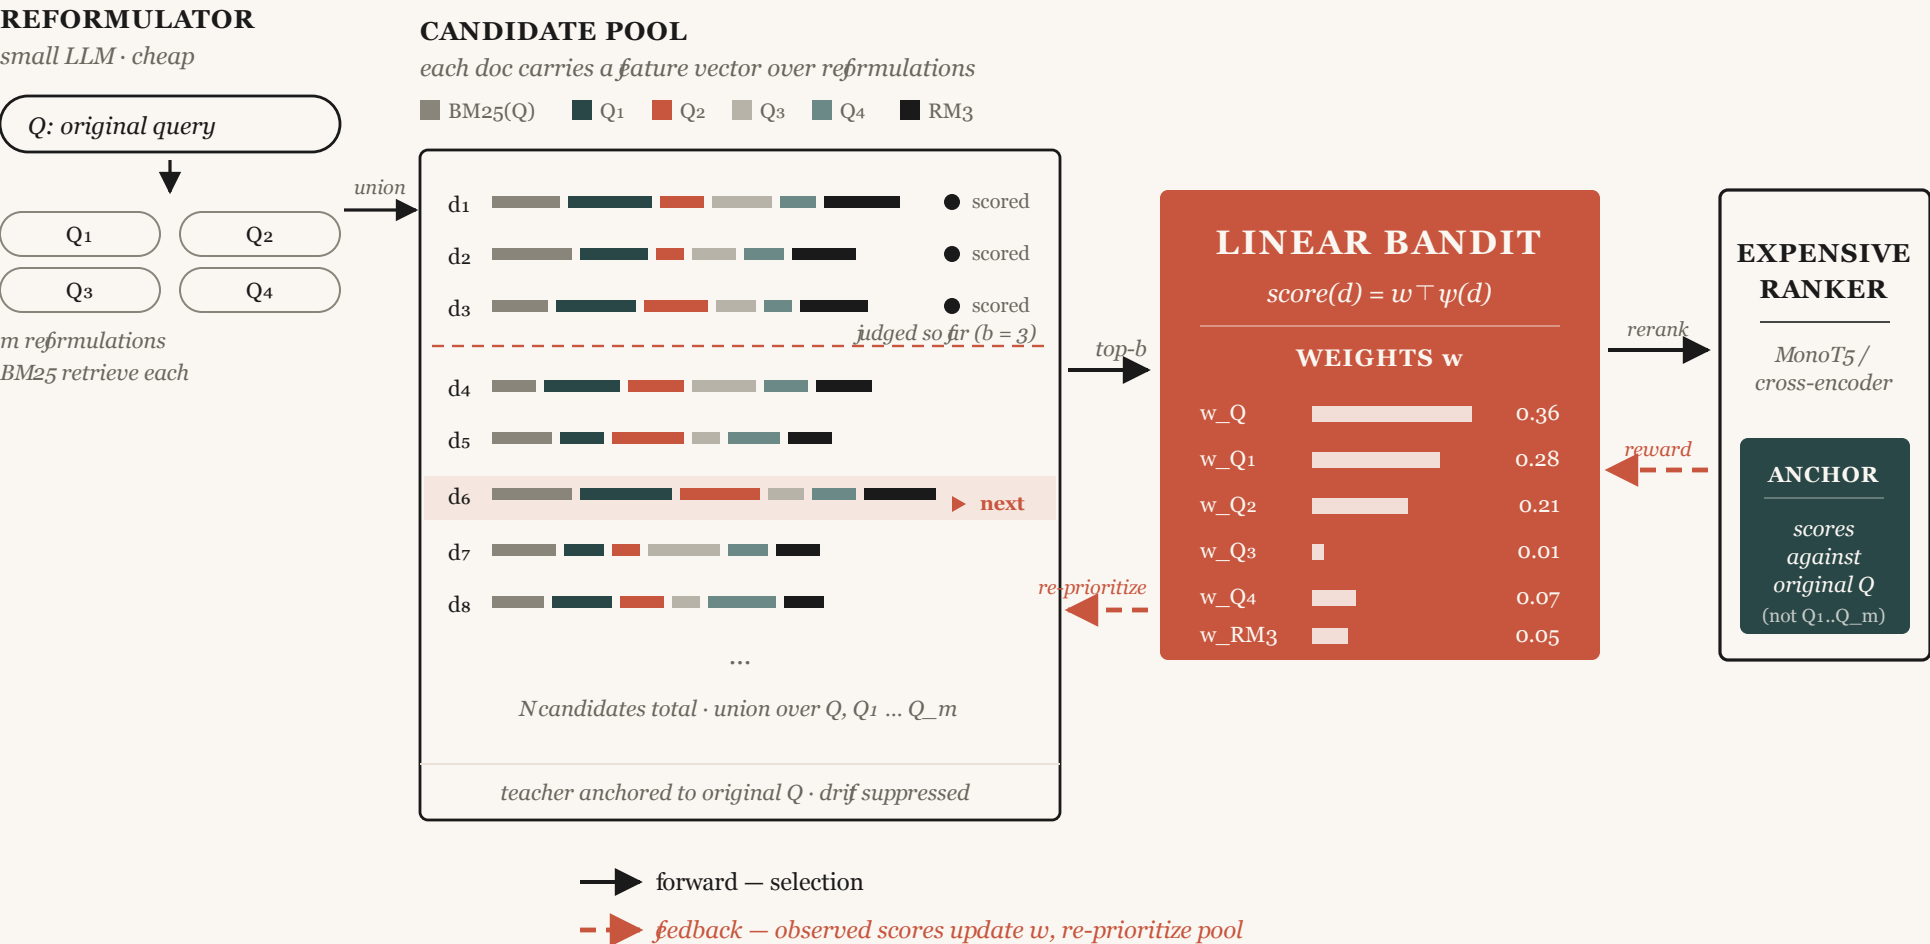

ORE puts *signals* in the feature vector. ReformIR puts *reformulations* in the feature vector.

Drifty reformulations get downweighted. Useful ones get upweighted. Per query. Online.