
HTTP Nanoservices


Useful work

Overhead

Monolithic service

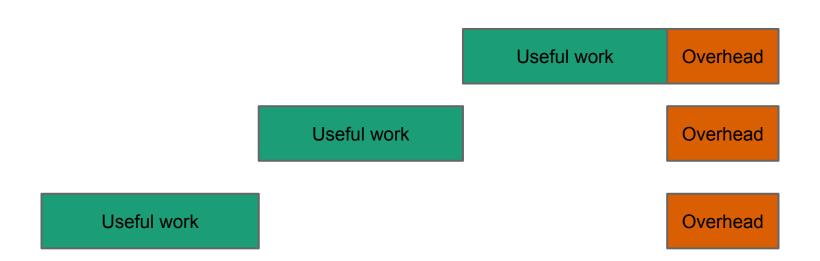


Microservices

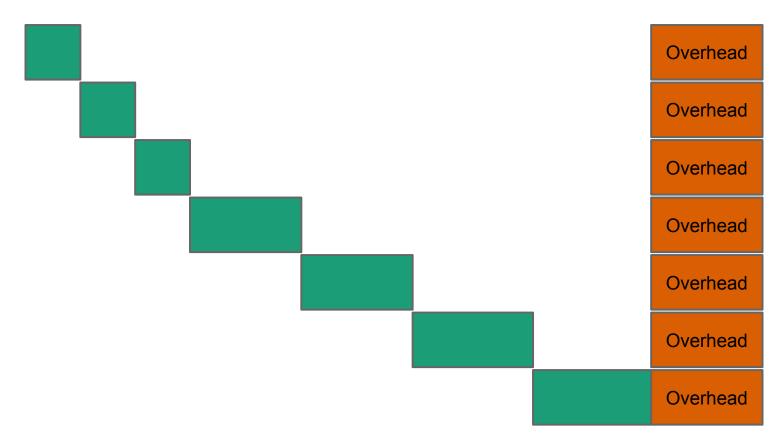

Nanoservices











<♂**> hookscript**

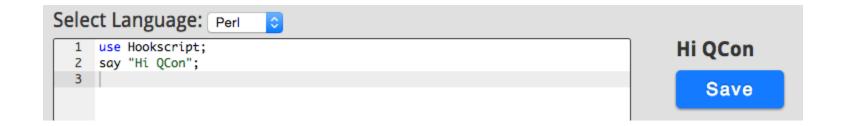




... get a server

Servers can

- access full HTTP request
- make outbound network requests
- store persistent data
- run arbitrary code or libraries

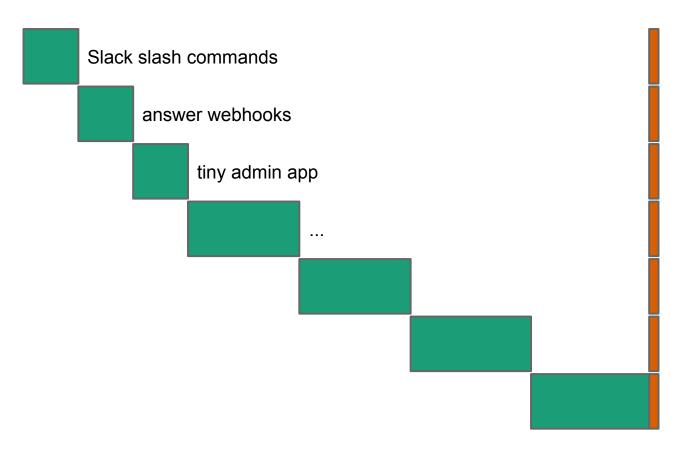

on Hookscript

hookscript.com

thanks