



Computer Fundamentals

Dr. Safdar Nawaz Khan Marwat
DCSE, UET Peshawar

Lecture 21



Algorithm

- Derived from the name of a mathematician
 - ❑ Mohammed ibn-Musa al-Khwarizmi
- Set of steps to accomplish a task
 - ❑ Always leads to a solution
- Before writing a program to solve a problem, we require
 - ❑ Thorough understanding of problem
 - ❑ Carefully planned approach for solving
 - ❑ To understand available building blocks
 - ❑ Employ proven program construction techniques
- Important aspects of algorithm
 - ❑ Actions to execute
 - ❑ Order of execution

Source: Deitel & Deitel, "C++, How to Program", 8th Edition



Algorithm (cont.)

- Consider the rise-and-shine algorithm
 - ☐ Get out of bed
 - ☐ Take a shower
 - ☐ Get dressed
 - ☐ Eat breakfast
 - ☐ Go to University

- Suppose same steps are performed in different order
 - ☐ Get out of bed
 - ☐ Get dressed
 - ☐ Take a shower
 - ☐ Eat breakfast
 - ☐ Go to University

Source: Deitel & Deitel, "C++, How to Program", 8th Edition



Pseudocode

- Fake code
- Artificial and informal language
 - ❑ To develop algorithms without details of language syntax
 - ❑ Similar to everyday English
 - ❑ Convenient and user friendly
 - ❑ Not actual computer programming language
- Used to conceptualize program before implementation

Source: Deitel & Deitel, "C++, How to Program", 8th Edition



Pseudocode (cont.)

➤ Example of adding two numbers

```
#include <iostream>
using namespace std;

int main ()
{
    int num1, num2, result;
    cout <<"Enter 1st number: ";
    cin >> num1;
    cout <<"Enter 2nd number: ";
    cin >> num2;
    result = num1 + num2;
    cout << "\nSum = " << result;
    cout << endl;
    return 0;
}
```

Prompt the user to enter integer num1
READ num1

Prompt the user to enter integer num2
READ num2







SET integer result as sum of num1 and num2
DISPLAY result

Source: Deitel & Deitel, "C++, How to Program", 8th Edition



Flowchart

- Diagrammatic representation of algorithm
- Helpful in explaining program to others

Symbol	Purpose	Description
	Flow line	Indicate flow of logic by connecting symbols
	Terminal (Start/Stop)	Represent start and end of flowchart
	Input/Output	Input and output operation
	Processing	Arithmetic operations and data-manipulations
	Decision	Represent operation with alternatives
	Predefined function	Represent group of statements performing one task

Source: <http://www.programiz.com/article/flowchart-programming>




Flowchart (cont.)

➤ Example of adding two numbers

```
#include <iostream>
using namespace std;

int main ()
{
    int num1, num2, result;
    cout << "Enter 1st number: ";
    cin >> num1;
    cout << "Enter 2nd number: ";
    cin >> num2;
    result = num1 + num2;
    cout << "\nSum = " << result;
    cout << endl;
    return 0;
}
```

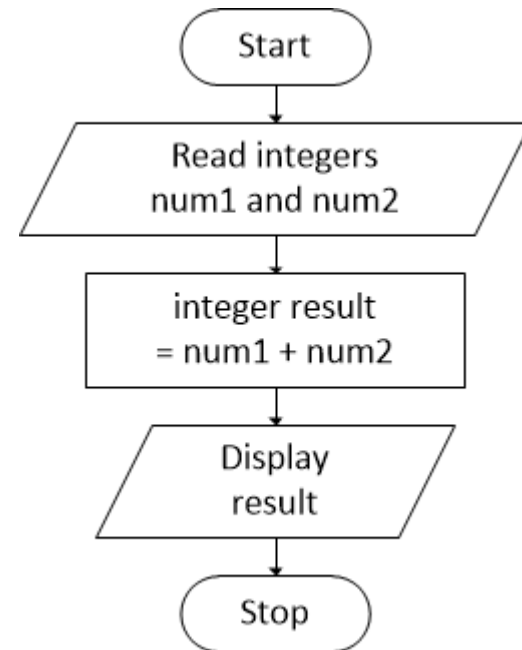



Source: Deitel & Deitel, "C++, How to Program", 8th Edition



Arithmetic Operations

- Arithmetic operations very important in programming
- Several operations possible

Operation	Arithmetic operator	Algebraic expression	Programming expression	Precedence 
Addition	+	$d + 7$	<code>d + 7</code>	Third
Subtraction	-	$a - c$	<code>a - c</code>	Third
Multiplication	*	$b t$ or $b . t$	<code>b * t</code>	Second
Division	/	x / y or $x \div y$	<code>x / y</code>	Second
Modulus 	%	$n \% d$	<code>n \% d</code>	Second
Parentheses	()	()	()	First

Source: Deitel & Deitel, "C++, How to Program", 8th Edition



Integer Variable

- Integer variable hold value to the left of decimal point
- Values to the right of decimal point discard

```
SET integer i equal to 3.9  
DISPLAY i
```

- ❑ The output would be 3 and not 3.9
- ❑ Integer does not hold value to the right of decimal point



if statement

- Allows program to take alternative action
 - ❑ Based on whether a condition is true or false
- If condition is true
 - ❑ Statement in body of `if` statement executed
- If condition is false
 - ❑ Body statement not executed
- Equality operators and relational operators used

Operator	Equality or relational operator	Sample condition	Meaning of condition
Relational Operators	>	$x > y$	x greater than y
	<	$x < y$	x less than y
	>=	$x \geq y$	x greater than or equal to y
	<=	$x \leq y$	x less than or equal to y
Equality operators	==	$x == y$	x equal to y
	!=	$x != y$	x not equal to y


Source: Deitel & Deitel, "C++, How to Program", 8th Edition



if statement (cont.)


➤ Pseudocode and flow chart of `if` statement

IF condition
 Body of IF
END IF

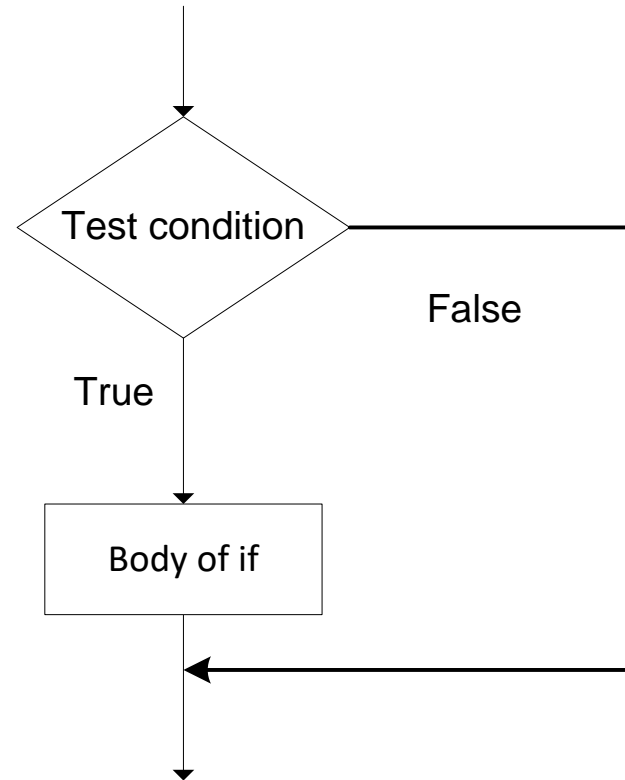




if statement (cont.)

- A program to check whether an integer entered by user is non-negative 

Prompt the user to enter integer num
READ num

IF num is greater than or equal to 0
 DISPLAY non-negative
END IF

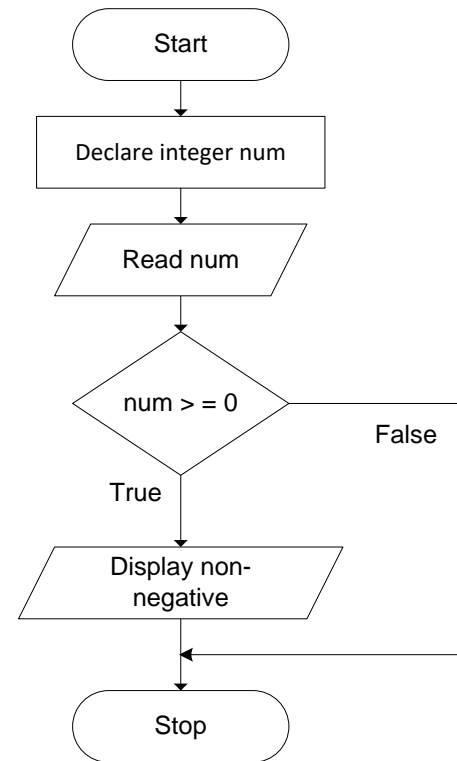



if else statement

- Allows program to take alternative action
 - ❑ Based on whether a condition is true or false
- If condition is true
 - ❑ Statement in body of `if` statement executed
- If condition is false
 - ❑ Body statement of `else` statement executed
- Equality operators and relational operators used


Source: Deitel & Deitel, "C++, How to Program", 8th Edition



if else statement (cont.)

➤ Pseudocode and flow chart of if else statement

```
IF condition
  Body of IF
ELSE
  Body of ELSE
END IF
```

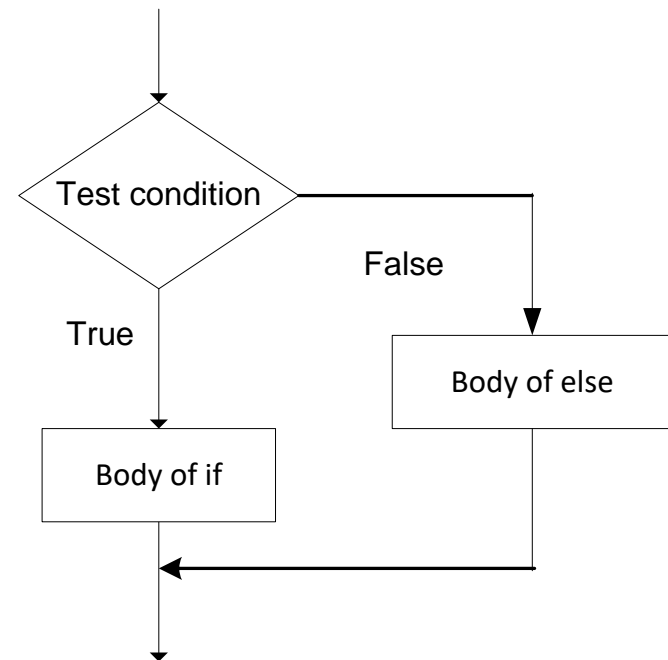

Source: <http://www.programiz.com/c-programming/c-if-else-statement>




if else statement (cont.)

- A program to check whether an integer entered by user is non-negative or negative

Prompt the user to enter integer num
READ num

IF num is greater than or equal to 0
 DISPLAY non-negative

ELSE
 DISPLAY negative
END IF

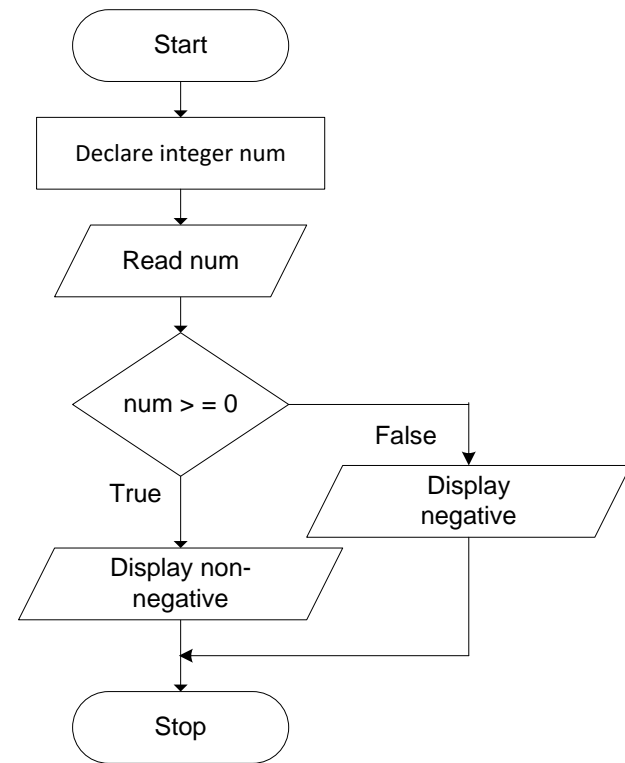

Source: http://users.csc.calpoly.edu/~jdalbey/SWE/pdl_std.html



Nested if else statements

- if else statements nested inside another else
- If one condition fails, another condition is checked
- Used when more than one test conditions are required
 - ❑ If first condition is true, body executed
 - ❑ Otherwise, second condition is tested
 - If second condition is true, body executed
 - Otherwise, third condition is tested

Source: <http://www.programiz.com/c-programming/c-if-else-statement>




Nested if else statements (cont.)

- A program about exam grade (A, B, C, D, F) and remarks

Prompt the user to enter character grade
READ grade

```
IF grade is 'A'  
  DISPLAY Excellent  
ELSE  
  IF grade is 'B' or 'C'  
    DISPLAY Well done  
  ELSE  
    IF grade is 'D'  
      DISPLAY You passed  
    ELSE  
      IF grade is 'F'  
        DISPLAY Try again  
      ELSE  
        DISPLAY Invalid grade  
      END IF  
    END IF  
  END IF  
END IF
```

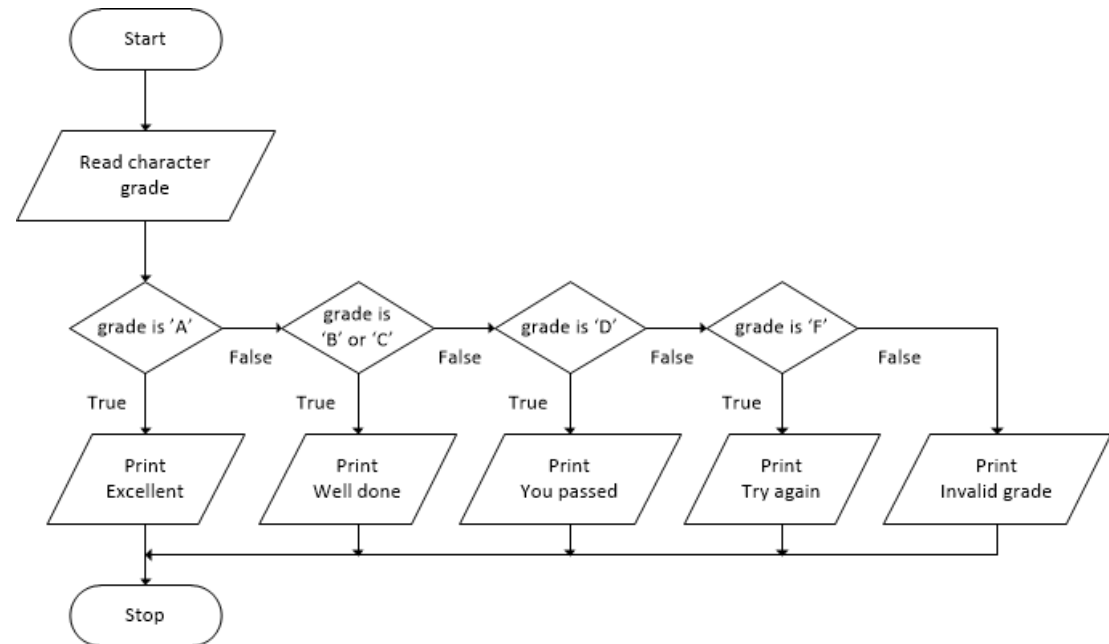



Class Task

- Write the pseudocode and draw flowchart for a program that reads an integer from the user and checks whether the number is odd or even.