

Eclipse Scout

Release Notes

Scout Team

Version 6.0

Table of Contents

What's New	1
The HTML UI.....	1
From OSGi to Plain Java	1
Project Structure	2
Platform.....	2
Job Framework	2
New styling possibilities with CSS	2
Theming.....	3
IStylable	3
Better HTML support at Java level	3
IHtmlCapable	3
HTML	4
HTMLUtility	4
Keyboard Shortcut Visualization	4
Font Icons	4
Login Page	5
UI Debugging using URL Hints	5
Documentation goes AsciiDoc	5
New and better widgets	6
Desktop	6
Outline	7
Form	9
Form Field.....	10
Group Box.....	10
Table.....	10
Tree.....	13
File Chooser	14
Smart Field	14
Date Field	15
Split Box.....	15
Calendar	16
Planner	17
Bean Field / Bean Column [New].....	17
Wizard Progress Field [New]	18
Chart Box.....	18
Security	18
MalwareScanner	18
IMimeTypeDetector [New]	18

UploadRequestHandler [Added features]	18
UserIdAccessControlService [Removed]	18
Known Limitations	19
Drag and drop support.....	19
Input placeholders	19

What's New

The HTML UI

With the previous Scout release 3 UIs were available: SWT and Swing for rich clients and Rap for web clients. The fact that every change in the Scout model resulted either in a huge effort to adjust every UI or in a divergence of the UIs if the effort could not be taken, led us to a radical step: We deleted these 3 UIs and replaced them with a complete new one: The HTML UI.

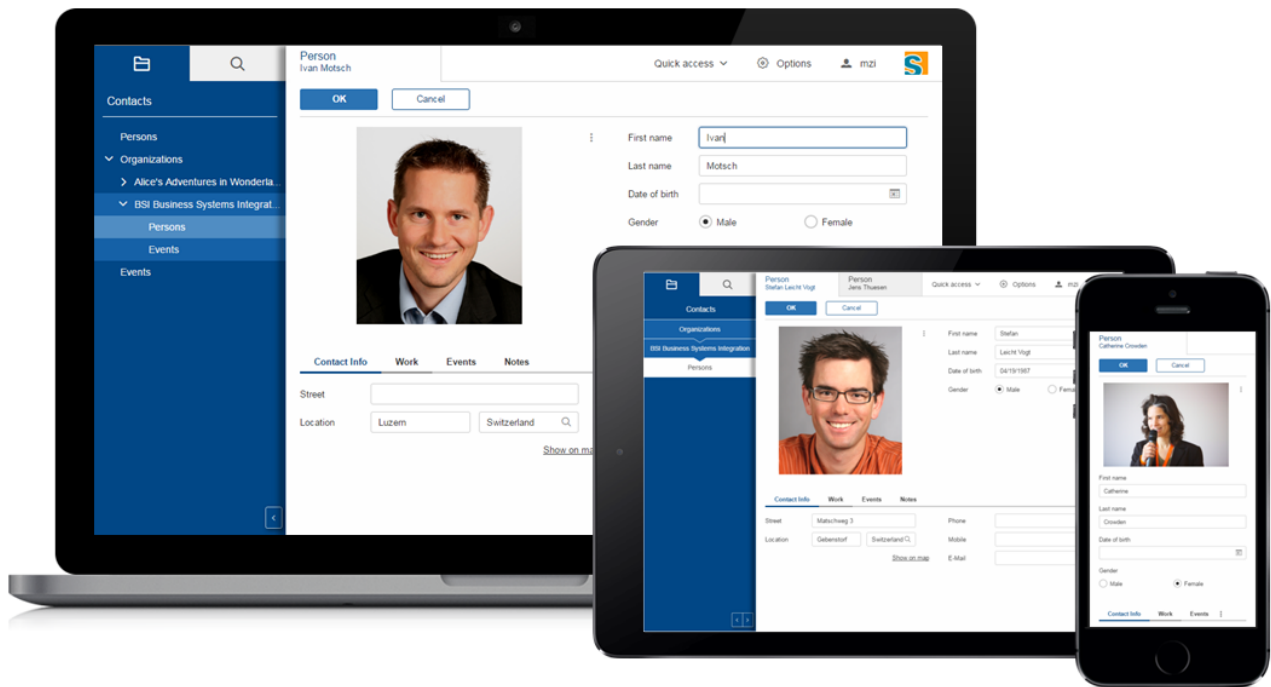


Figure 1. The new UI for Scout

As the name implies it is a UI for a web client based on state of the art web technologies: HTML 5, CSS 3 and JavaScript. Without the restrictions of the old UIs we were able to create a new UI tailored to the needs of the Scout users. And because it perfectly fits the Scout model no compromises had to be made.

The new HTML UI not only gives your application a modern look & feel, it also gives you more possibilities regarding styling and customizing.

From OSGi to Plain Java

With the Neon release, Scout changes from an Eclipse/OSGi based runtime to a pure java project. The reasons for this change were

- to bring simplicity back to Scout
- integrate easier with Java EE containers
- build projects with Maven only, express project dependencies with Maven only
- integrate third party libraries directly via Maven Central

Project Structure

The project structure is now typically converted to the standard maven [project structure](#).

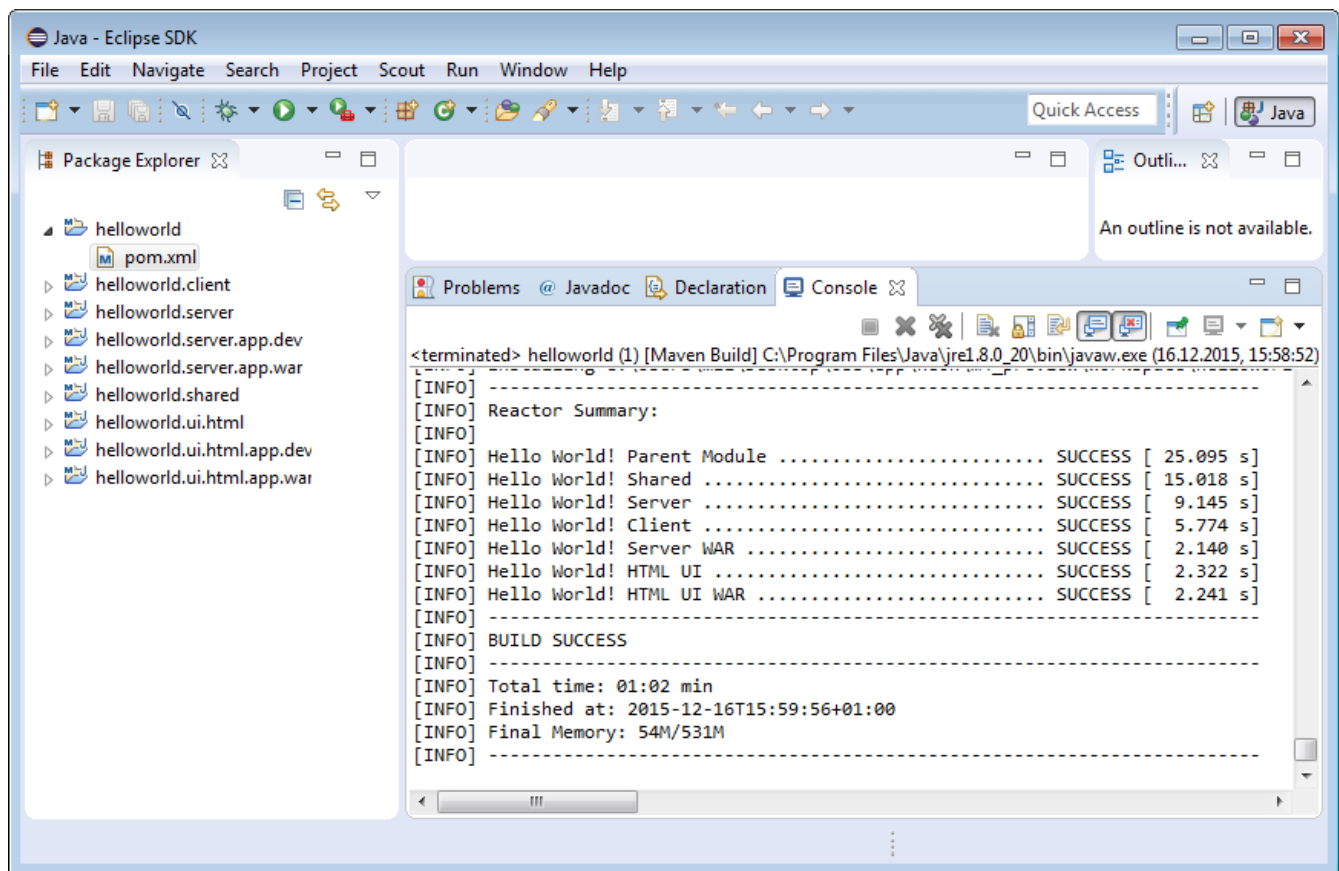


Figure 2. Maven

Platform

OSGi services and extension points have been replaced by beans managed by the [Scout bean manager](#). Applications are replaced by [platform listeners](#) provided by the Scout [platform](#).

Various Changes

- [org.eclipse.scout.commons](#) reorganized, classes moved to [org.eclipse.scout.rt.platform](#) and other projects

Job Framework

The eclipse job framework has been replaced by a new [job framework](#) based on Java executors framework.

New styling possibilities with CSS

It is now finally possible to use the full power of CSS to style your application. To make it more maintainable Scout uses [LESS](#) which you can use as well.

Theming

With the new theming support you can create a custom theme for your application instead of taking the default one provided by Scout. Or you could even define multiple themes and offer them to your users.

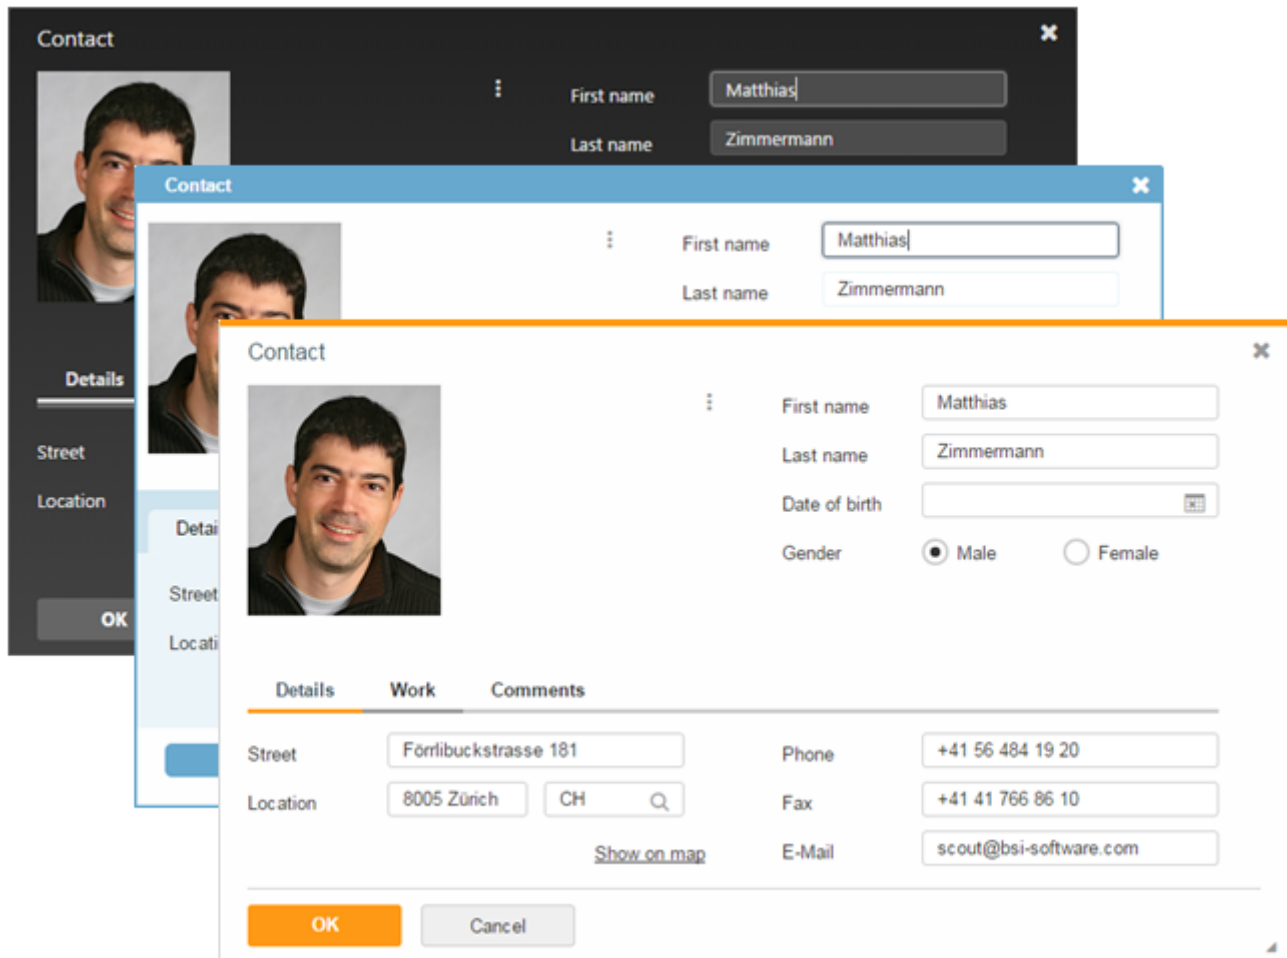


Figure 3. Theming

IStylable

Every form field and some other widgets now provide a new property called `CssClass`. It accepts one or more css classes separated with a space. This makes it possible to adjust the style of a specific form field and even a table cell or tree node. Look for the interface `IStylable` for stylable widgets.

Better HTML support at Java level

IHtmlCapable

Certain widgets support html content instead of plain text, like `ILabelField` or `IColumn`. To prevent HTML injection and cross-site scripting you need to enable the interpretation of HTML explicitly using the property `htmlEnabled`. See `IHtmlCapable` for details.

HTML

Use the class `org.eclipse.scout.rt.platform.html.HTML` to build HTML content instead of concatenate the strings manually.

HTMLUtility

`org.eclipse.scout.rt.platform.html.HTMLUtility` and `org.eclipse.scout.rt.platform.html.CSSPatch` were deprecated because they contained only legacy code of doubtful quality. Do not use them anymore — they will be removed in the next Scout release. The support for most of the contained methods was dropped, because they are not required anymore with the new UI. A slightly improved version of the `getPlainText()` method is available on the new bean `org.eclipse.scout.rt.platform.html.HtmlHelper`.

Keyboard Shortcut Visualization

Keyboard shortcuts are an important tool for power users. To make them more accessible it is now possible to show the currently available shortcuts just by pressing F1. Currently available means that the focused element as well as the enabled state is respected so that only those shortcuts which really can be executed are shown.

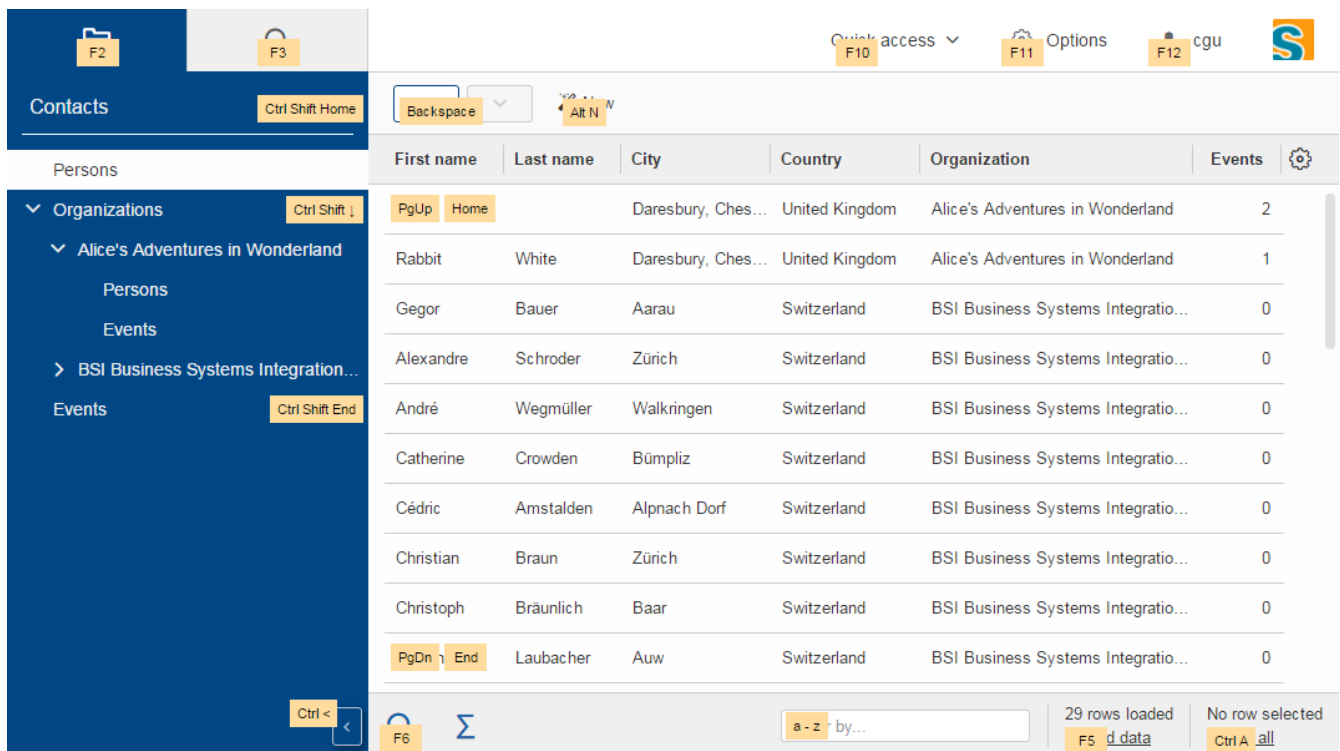


Figure 4. Keyboard Shortcut Visualization

Font Icons

The new UI uses font icons instead of bitmap icons because they are scalable, can be colored using CSS and can be loaded with one request. It is suggested that you use font icons as well. Scout provides the font `scoutIcons` which contains the icons used by Scout itself. If they are not sufficient

you can either create a custom font with only the icons you need, or include a pre-built one like [FontAwesome](#).

Anyway, bitmap icons are still supported.

Login Page

Compared to the previous web ui, adding a form based login page is now a lot simpler. Scout provides a `login.html` which can either be used as is or adjusted to your needs.

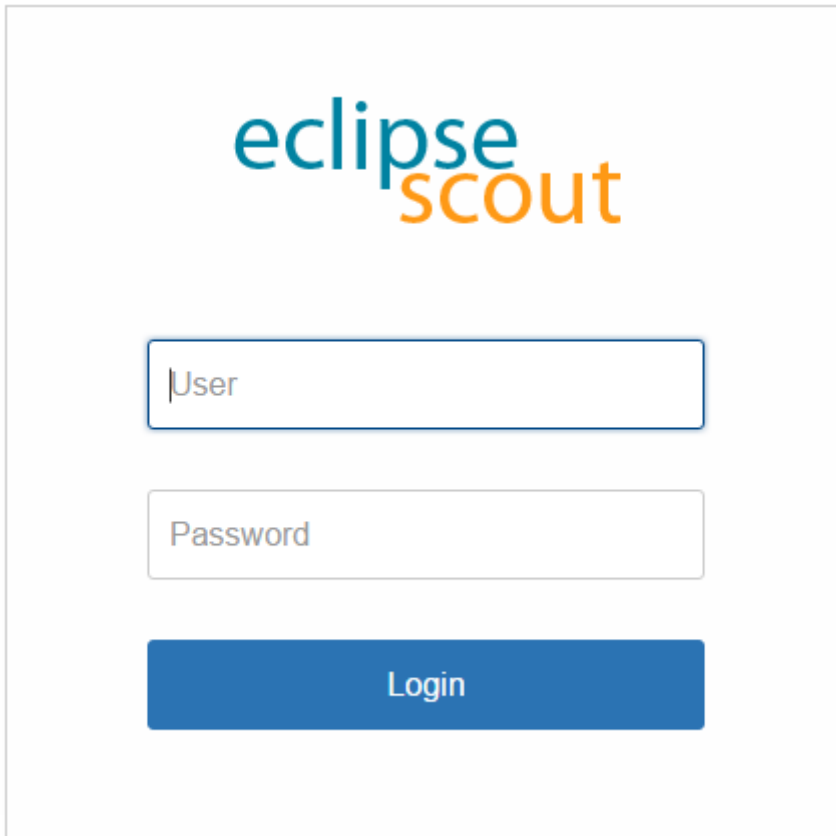
The image shows a login page for Eclipse Scout. At the top, the logo consists of the word 'eclipse' in blue and 'scout' in orange. Below the logo, there are two input fields: the first is labeled 'User' and the second is labeled 'Password'. Both fields have a light blue border. Below the password field is a solid blue button with the word 'Login' in white text.

Figure 5. Login Page

UI Debugging using URL Hints

The new UI provides url hints for easier debugging: `?cache`, `?compress`, `?minify`, `?debug`, `?inspector`. By default they are only enabled in development mode. This behavior can be controlled using the property `scout.urlHints.enabled`.

Documentation goes AsciiDoc

The Scout documentation has been moved to AsciiDoctor. The documentation is currently hosted on GitHub and the output of the documentation build is available on github.io: [Technical Guide](#).

New and better widgets

Beside the new look of every widget, most of them got new functionality as well.

Desktop

New Layout

The new desktop consists of three areas: The navigation, the header and the bench.

The navigation shows the outline, the header may contain tools and the bench shows the detail content of the outline (table/form) or forms opened as views.

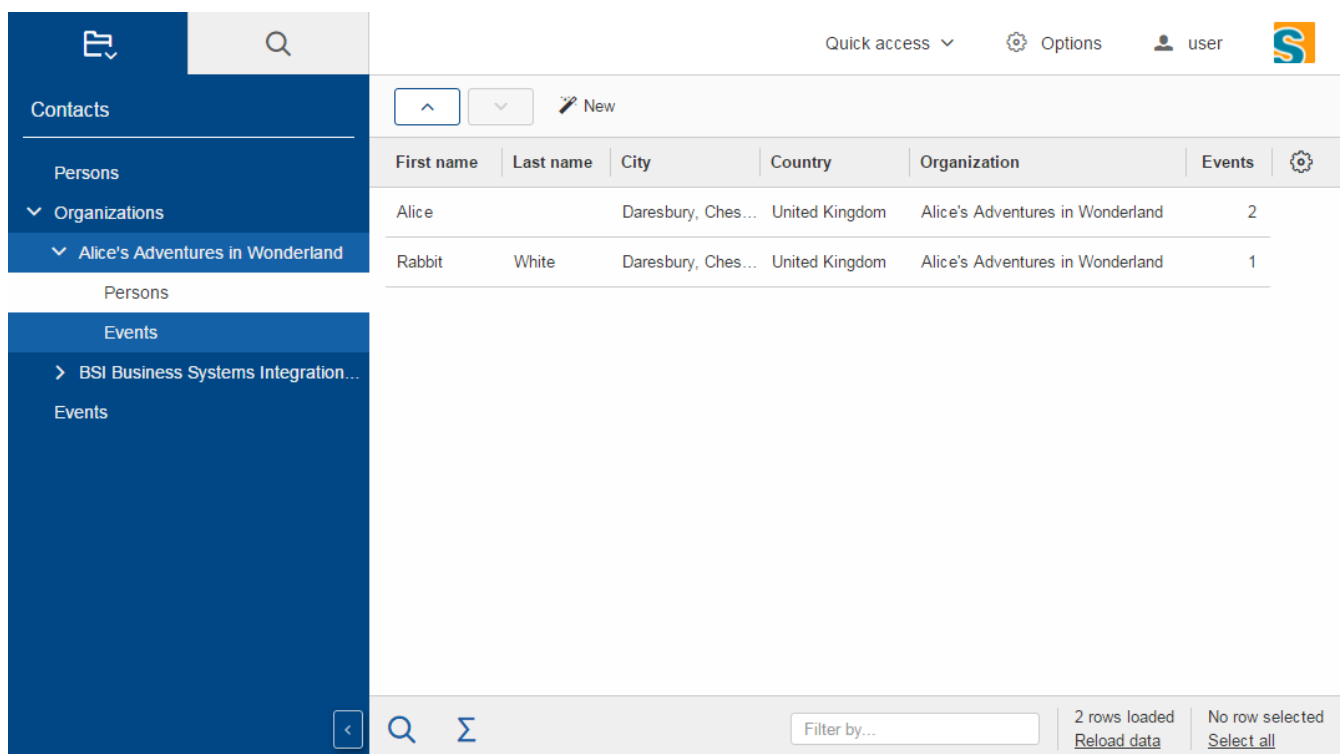


Figure 6. Desktop Layout

Compared to previous Scout releases, there are no forms required anymore to show the outline and its table. Therefore, `DefaultOutlineTreeForm` and `DefaultOutlineTableForm` have been removed.

If you want to show more than one form at a time you can still do it using the properties `displayHint` and `displayViewId` of `IForm`. These forms will be shown in the bench area.

To adjust the desktop layout you can use these new properties:

- `navigationVisible`: Hide/Show the navigation pane
- `navigationHandleVisible`: Hide/Show the handle which allows the user to toggle the visibility of the navigation
- `headerVisible`: Hide/Show the header
- `benchVisible`: Hide/Show the bench

DisplayStyle: More or less controls the above properties. With `DISPLAY_STYLE_BENCH` only the bench is visible, with `DISPLAY_STYLE_COMPACT` (which is used for mobile devices) either the navigation or bench and header are visible.

Notifications

The desktop may now display toast notifications on the top right corner.

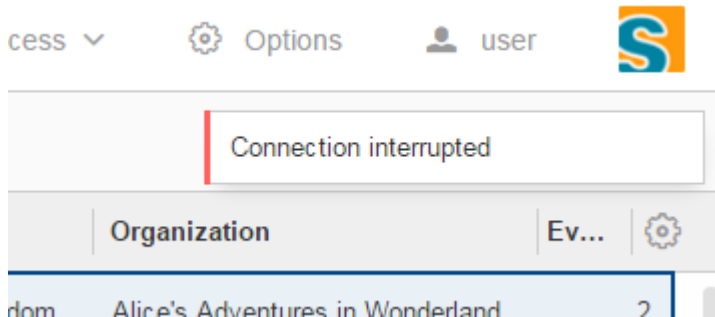


Figure 7. Desktop Notification

Various Changes

- Menus of a page are now added to the detail form. This was necessary because the outline tree does not show any menus anymore. See also method `AbstractPageWithNodes.enhanceDetailFormWithPageMenus`.
- Added `AbstractDesktop.getConfiguredSelectViewTabsKeyStrokesEnabled`: It is possible to change view tabs with modifier+number. The number is generated by the ui. 9 is reserved to jump to the last tab, 0 to jump to the first tab. This functionality can be disabled by setting this property to false.
 - `getConfiguredSelectViewTabsKeyStrokeModifier`: if the above property is set to `true` the modifier specified by this property is used in combination with a number to change to the specific tab.
- `AbstractDesktop.isOutlineChanging` added.
- The methods `traverseFocusNext()` and `traverseFocusPrevious` were removed from `IDesktop` because traversing is not supported by the HTML UI. (Neither was it supported by the former RAP UI). The corresponding `DesktopEvent` types (`TYPE_TRAVERSE_FOCUS_NEXT`, `TYPE_TRAVERSE_FOCUS_PREVIOUS`) were removed as well.

Outline

New search outline

The intention of the `ISearchOutline` is to provide a search over several table pages. The `AbstractSearchOutline` provides a frame, the search itself has to be implemented by the project.

Default Detail Form

It is now possible to configure a default detail form for outlines. The default detail form gets shown

when no page is selected.

API Notes:

`getConfiguredDefaultDetailForm`, `execInitDefaultDetailForm`, `createDefaultDetailForm`,
`startDefaultDetailForm`.

Navigate Buttons

The new navigate buttons may be used to navigate through the outline.

If you don't need them you can remove them using the property `navigateButtonsVisible`.



Figure 8. Navigate Buttons

Bread Crumb Style

The outline (and actually every tree) can now be displayed as a bread crumb tree which arranges the nodes in a different way than a classic tree.



Figure 9. Breadcrumb Navigation

Various Changes

- Added `getConfiguredTableStatusVisible` on `IPageWithTable`: It is now possible to configure whether the table status should be visible for a table page. Until now table status was set visible

by the `OutlineTableForm`.

- Improved page search form disposal: Search form is now closed when the page gets disposed.

Form

Form Tabs

It is now possible to stack multiple forms and switch between them using tabs. This already worked with SWT and Rap but not with the Swing UI. Just set the property `displayHint` to `DISPLAY_HINT_VIEW` and use the same `displayViewId`.

The screenshot shows a web application interface for editing a person's profile. At the top, there's a header with a search icon, the text 'Person Alice', a dropdown menu for 'Organization Alice's Adventures ...', a 'Quick access' dropdown, a gear icon for 'Options', a user icon for 'user', and a logo. Below the header are 'OK' and 'Cancel' buttons. The main content area features a large illustration of Alice from 'Alice's Adventures Under Ground' on the left. To the right of the illustration are form fields for 'First name' (filled with 'Alice'), 'Last name' (empty), 'Date of birth' (filled with '11/26/1865' and a calendar icon), and 'Gender' (radio buttons for 'Male' and 'Female', with 'Female' selected). Below these fields are four tabs: 'Contact Info', 'Work', 'Events', and 'Notes'. The 'Contact Info' tab is active, showing fields for 'Street', 'Location' (with a dropdown showing 'Daresbury, C' and 'United KinQ'), 'Phone', 'Mobile', and 'E-Mail'. A 'Show on map' link is also present under the location field.

Figure 10. Open multiple forms simultaneously

Form Menu

It is now possible to embed a form in a menu using `IFormMenu`.

The screenshot shows a menu interface with a 'Quick access' dropdown and an 'Options' button. Below this, there's a form for 'UI Theme' with a dropdown menu showing 'Default' and a search icon. At the bottom of the menu is a blue 'Apply' button.

Figure 11. A form embedded in a menu

Various Changes

- Added `IForm.start()`: Mainly useful for forms with just one handler (detail forms, tool forms etc.). May be implemented by the concrete form. The default implementation at `AbstractForm` uses `getHandler()` to start the form.
- Forms are now cached in the UI until they are closed. Make sure to close unused forms to free up memory.

Form Field

New Status, Menu and Tooltip Visualization

On the right side of every form field there is space reserved for the status (info, warn, error), the menu or the tooltip of the field. This means it is now apparent to the user whether the field has a tooltip or a menu.

The visibility of that space is controllable using the property `statusVisible`. Setting it to false will make the field using the whole space, but if there is a status, tooltip or menu it will be shown anyway.

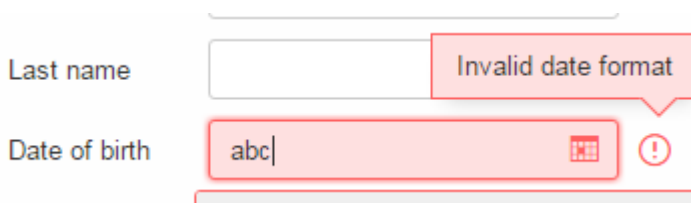


Figure 12. Display of an input error

Group Box

Menu Bar

The group box may now contain menus shown in the menu bar. Due to backward compatibility reasons process buttons are shown in the menu bar as well.

You can control the position using the property `horizontalAlignment` of `IAction`.

Various Changes

`AbstractGroupBox.setBorderVisible(false)` does not change visibility of label anymore. Label of group-box must be made invisible by calling `setLabelVisible(false)`.

Table

New Table Controls

Table controls are controls on the bottom of the table. Default controls are `SearchFormTableControl` which shows the search form and `AggregateTableControl` which shows aggregation details for

number columns.

API Notes:

- `ITableControl`, `IFormTableControl`
- `List<ITableControl> getTableControls()`
- `<T extends ITableControl> T getTableControl(Class<T> controlClass)`

Grouping and Aggregation Functionality

The table now provides a possibility to group the data by multiple columns. Additionally, there are aggregation functions available on number columns like *SUM* or *AVG* which may be used in combination with the grouping functionality and the `AggregationTableControl`.

First name	Last name	City	Country	Organization	Events
Catherine	Crowder	Bümpliz	Switzerland	BSI Business Systems Integratio...	0
Bümpliz					Σ 0
Alice		Daresbury, Ches...	United Kingdom	Alice's Adventures in Wonderland	2
Rabbit	White	Daresbury, Ches...	United Kingdom	Alice's Adventures in Wonderland	1
Daresbury, Che...					Σ 3

Figure 13. Grouped by city

API Notes:

- `AbstractColumn.getConfiguredGrouped`
- `AbstractNumberColumn.getConfiguredAggregationFunction`

Background Effect

Number columns may now have a background effect to visualize numeric data.

Events ↓
2
1
0
0
0

Figure 14. Background effect used to visualize the number of events

API Notes:

- `AbstractTable.getConfiguredBackgroundEffect`

Table Settings

The user may now have multiple table settings. These settings may be managed using the revised `OrganizeColumnsForm`.

Column	Width
<input checked="" type="checkbox"/> First name	120
<input checked="" type="checkbox"/> Last name	120
<input checked="" type="checkbox"/> City	120
<input checked="" type="checkbox"/> Country	120
<input type="checkbox"/> Phone	120
<input type="checkbox"/> Mobile	120
<input type="checkbox"/> E-Mail	200
<input checked="" type="checkbox"/> Organization	200

Figure 15. Table settings

Possibility to Reload the Table.

The table may show a link to let the user reload the table. To make this work the table needs to provide a `IReloadHandler`. Default reload handlers are `PageReloadHandler` and `TableFieldReloadHandler`.

New Table Status

The table status was moved from `ITableField` to `ITable` so that the status may be shown in the detail table used in an outline as well.

API Notes:

- `boolean isTableStatusVisible()`
- `void setTableStatusVisible(boolean visible)`

New Table Filters

In addition to the column based filters there is now a single text filter available to filter the whole table data.

	Daresbury, Ches...	United Kingdom	Alice's Adventures in V
White	Daresbury, Ches...	United Kingdom	Alice's Adventures in V

alice	29 rows loaded Reload data	2 rows filtered by alice Remove filter
-------	---	---

Figure 16. Table text filter

To make the filtering as fast as possible, the filtering does now happen in the UI and not in the Java model anymore. To make this happen the table filters have been reworked. See [TableUserFilterManager](#) for details.

Icon Column

The icon column may be used to show icons or images, no text. The advantage compared to a string column with a cell icon is that sorting and grouping works as expected.

Various Changes

Behavior change of [Table](#) in [AbstractTableField](#): Do not execute [AbstractTable.execContentChanged\(\)](#) when [valueChangeTriggers](#) flag on [IFormField](#) is [false](#).

Tree

Default Icon ID

The difference between the new property [defaultIconId](#) and the property [iconId](#) is as follows: [DefaultIconId](#) is used as default for all tree nodes that don't have an icon on their own. [IconId](#) may be used in the same way as the title, e.g as outline icon.

Auto Check Child Nodes

If this new property is set to true, every check of a node automatically checks its child nodes as well.

Lazy Expansion

Nodes may now be expanded in a lazy way. This means only those child nodes are visible which are expanded as well and the parent gets a '+' symbol. If the user clicks on this symbol all child nodes gets visible. The model can define whether child pages of a page should be added immediately to the outline tree or lazily.

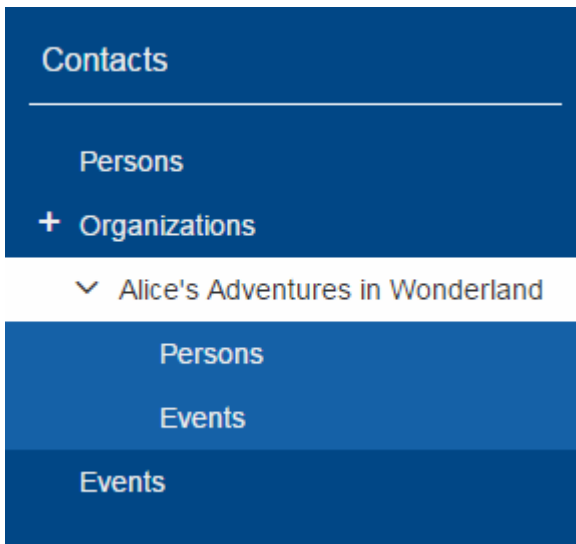


Figure 17. Lazy expansion of organizations

Concerns only **IOutline**:

- Node pages never add child pages lazily. Table pages add child nodes lazily when they have more than a specific number of child pages (default 1).
- The behavior may be controlled using:
 - `boolean getConfiguredLazyAddChildPagesToOutline()` → default `false`, for `AbstractPageWithTable` the default is `true`.
 - `int getConfiguredLazyAddChildPagesToOutlineThreshold()` → setting for `AbstractPageWithTable`, after how many child pages the lazy setting should be active (default 1)

File Chooser

File upload size is always limited now (otherwise server might run out of memory if too large files are sent). Default size is 50 MB, but every field might specify lower/higher sizes:

- `org.eclipse.scout.rt.client.ui.IDNDSupport.setDropMaximumSize(long)`
- `org.eclipse.scout.rt.client.ui.IDNDSupport.getDropMaximumSize()`
- `org.eclipse.scout.rt.client.ui.basic.filechooser.IFileChooser.setMaximumUploadSize(long)`
- `org.eclipse.scout.rt.client.ui.basic.filechooser.IFileChooser.getMaximumUploadSize()`
- `org.eclipse.scout.rt.client.ui.form.fields.filechooserfield.IFileChooserField.setMaximumUploadSize(long)`
- `org.eclipse.scout.rt.client.ui.form.fields.filechooserfield.IFileChooserField.getMaximumUploadSize()`
- Also added `getConfigured...` methods were applicable for properties above.

Smart Field


Removal of SmartFieldContainerForm

Smart fields used to open a form containing a tree or a table. This overhead was removed. Instead it just displays the table or tree directly. Nevertheless you still have the possibility to provide a custom table or tree using an inner class at `AbstractContentAssistField`. See `IContentAssistFieldTable` and `IProposalChooser` for details.

Date Field

Date Prediction

New new date field tries to predict the date the user is about to enter. The predicted date is shown with a brighter color and may be accepted using the *return* or *tab* key.

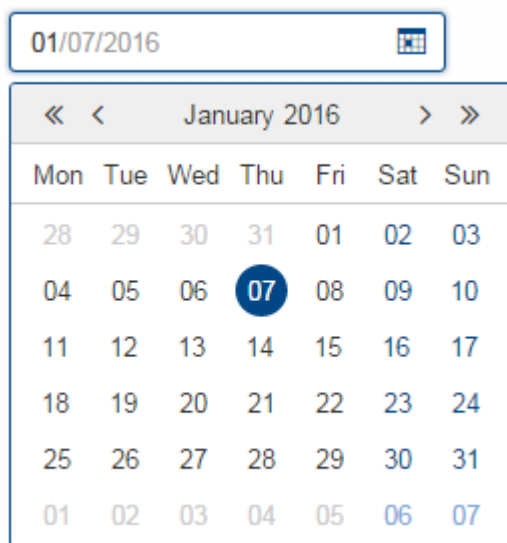

The image shows a date field interface. At the top, there is a text input box containing the date "01/07/2016" and a small calendar icon to its right. Below the input box is a calendar grid for January 2016. The calendar has a header row with days of the week (Mon to Sun) and a grid of dates. The date "07" (January 7th) is highlighted with a dark blue circle, indicating it is the predicted date. The other dates are in a lighter blue color.

January 2016						
Mon	Tue	Wed	Thu	Fri	Sat	Sun
28	29	30	31	01	02	03
04	05	06	07	08	09	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31
01	02	03	04	05	06	07

Figure 18. User entered 01, the predicted date is 01/07/2016

Allowed Dates

You may now restrict the available dates in a date field using `setAllowedDates`. If the list is empty all dates are allowed. Otherwise the dates are not selectable.

Parsing

The date field no longer inherits from `BasicField`. Instead it inherits directly from `ValueField`. This means that the `PROP_UPDATE_DISPLAY_TEXT_ON_MODIFY` is no longer supported on date fields. The reason for this change was the separation of UI (Browser) and UI-Server (Java). To get a good performance, fast date predictions and offline capability, the parsing must be done in the UI and not on the server. Because the "update on modify" flag had no effect anyway, it was completely removed from the UI. (More details in the Migration Guide).

Split Box

Absolute Splitter Positions

Split boxes now support absolute splitter positions. The old relative position is the default, which uses a value between 0 and 1 for the `splitterPosition`. By changing the property `splitterPositionType`, the interpretation of the `splitterPosition` value can be changed to pixels (either fixed for the first or the second inner box).

Collapsible Split Box

`AbstractSplitBox` now provides a *collapse* state for one of the two fields. When a field is marked as collapsible, the UI shows a toggle-button which allows to collapse and expand that field. The following methods and configurations are new:

- `Class<? extends IFormField> getConfiguredCollapsibleField()` returns the class of the field which should be collapsible. Default is null.
- `boolean getConfiguredFieldCollapsed()` returns whether or not the field is initially collapsed. Default is false.
- `String getConfiguredCollapseKeyStroke()` returns the key-stroke used to trigger the collapse button. Default is null.
- At runtime use the methods `setCollapsedField(IFormField)`, `setFieldCollapsed(boolean)` and `setCollapseKeyStroke(String)` to change the properties described above.

Various Changes

`AbstractSplitBox` now returns `IFormField.FULL_SIZE` in `getConfiguredGridW()` by default. Reason: The split box widget does not really have a representation of its own, but is more like a container for other fields. It can never have label, mandatory indicator etc. Its layout should behave like a group box or a tab box, therefore the default gridW value was adjusted accordingly.

Calendar

The calendar got a complete new modern look and new functionality like the year panel.

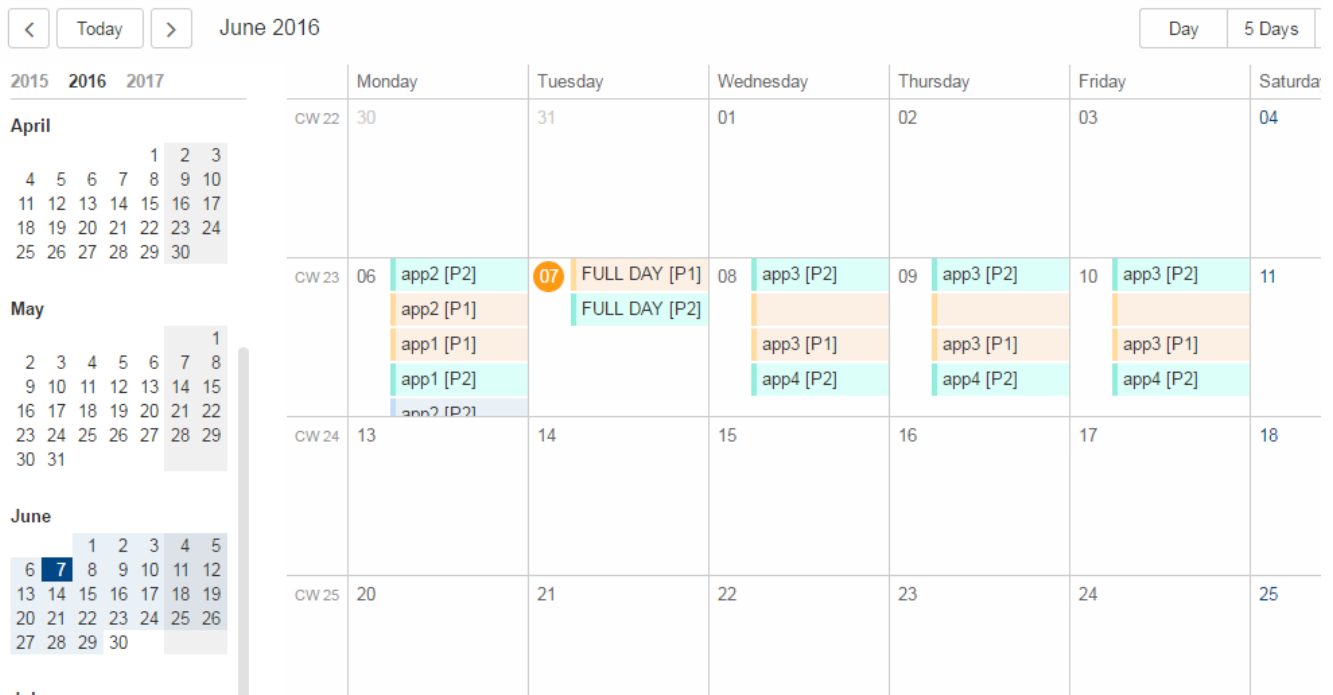


Figure 19. Calendar

Planner

The planner used to be a combination of a table and an activity map. This has been reworked to make it simpler to use.

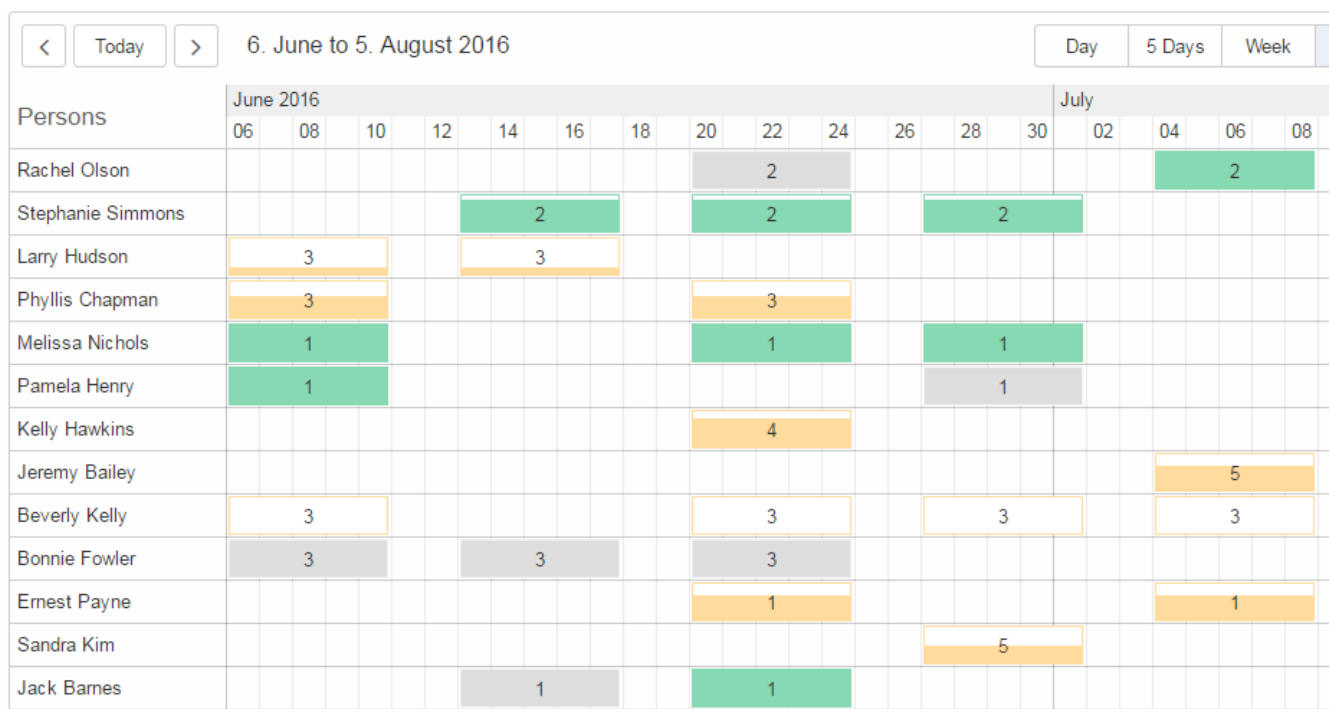


Figure 20. Planner

Bean Field / Bean Column [New]

The new **IBeanField** and **IBeanColumn** are used for advanced visualization as an alternative to the **IHtmlField**. As the name suggests the datatype is a plain java bean. Compared to the **IHtmlField** the

visualization does not happen in the model but in the UI layer using HTML/CSS/JavaScript, where it actually belongs to. The bean field is mainly intended for a custom visualization of data. If you want to provide interactive functionality you probably need to create a custom widget.

Wizard Progress Field [New]

The new `WizardProgressField` is normally visualized as a list of steps with some indication which step is the current step etc. It replaces the old "HTML status" field on the default wizard container form.

Chart Box

Removed chart box because it has not been used and there is no UI implementation.

Security

MalwareScanner

Facility used to scan files and resources for malware. The new `@Bean MalwareScanner` assumes that an appropriate malware scanner is in place on the webapp deployment machine and is configured to scan the TEMP folder (as used by `File#createTempFile`) using a realtime filesystem scan strategy. Malware should therefore immediately be removed or blocked by the malware implementation when placed in that folder. The new `MalwareScanner` is used in the `ui.html` file upload handler and thus checks every uploaded file.

IMimeTypeDetector [New]

The new interface `IMimeTypeDetector` provides multiple ordered implementations that can detect mime types. `PrimaryMimeTypeDetector` with order 0 defines important webapp mime types. `ServletContextMimeTypeDetector` with order 10 uses `ServletContext.getMimeType`. `JavaNioMimeTypeDetector` uses `java.nio Files.probeContentType`.

UploadRequestHandler [Added features]

The `UploadRequestHandler` checks for malware and limits the file types that can be uploaded. == Session Cookie (JSESSIONID Cookie) configuration validation The HTML UI checks if the application is configured safe by validating some flags set on the session cookie. For more details on how to configure your session cookie please refer to the Scout Documentation chapter "Session Cookie (JSESSIONID Cookie) Configuration".

UserIdAccessControlService [Removed]

`org.eclipse.scout.rt.shared.services.common.security.UserIdAccessControlService` was removed in M7. When creating a new Scout project via SDK, an own implementation of `AbstractAccessControlService` is now explicitly created in shared, named `AccessControlService` (as

replacement for the removed `UserIdAccessControlService`). The class generated at the server side now replaces (@Replace) the new one generated in shared (class name of server side changed from `AccessControlService` to `ServerAccessControlService`).

Known Limitations

Drag and drop support

IE9 does not support dropping files. Therefore, drag and drop in file chooser is not supported for that browser.

Input placeholders

On-field labels are not visible in IE9 because it lacks support for the "placeholder" attribute.



Do you want to improve this document? Please [edit this page](#) on GitHub.