

Exercise 5

Part 1

1. Install Minikube on your computer

```
minikube start
```

2. Open the minikube dashboard


```
minikube dashboard
```

Part 2

1. Run container in kubernetes

```
kubectl run demo --image=awenzelhuemer/myhello:latest --port=5000 --  
labels=app=demo
```

Result:

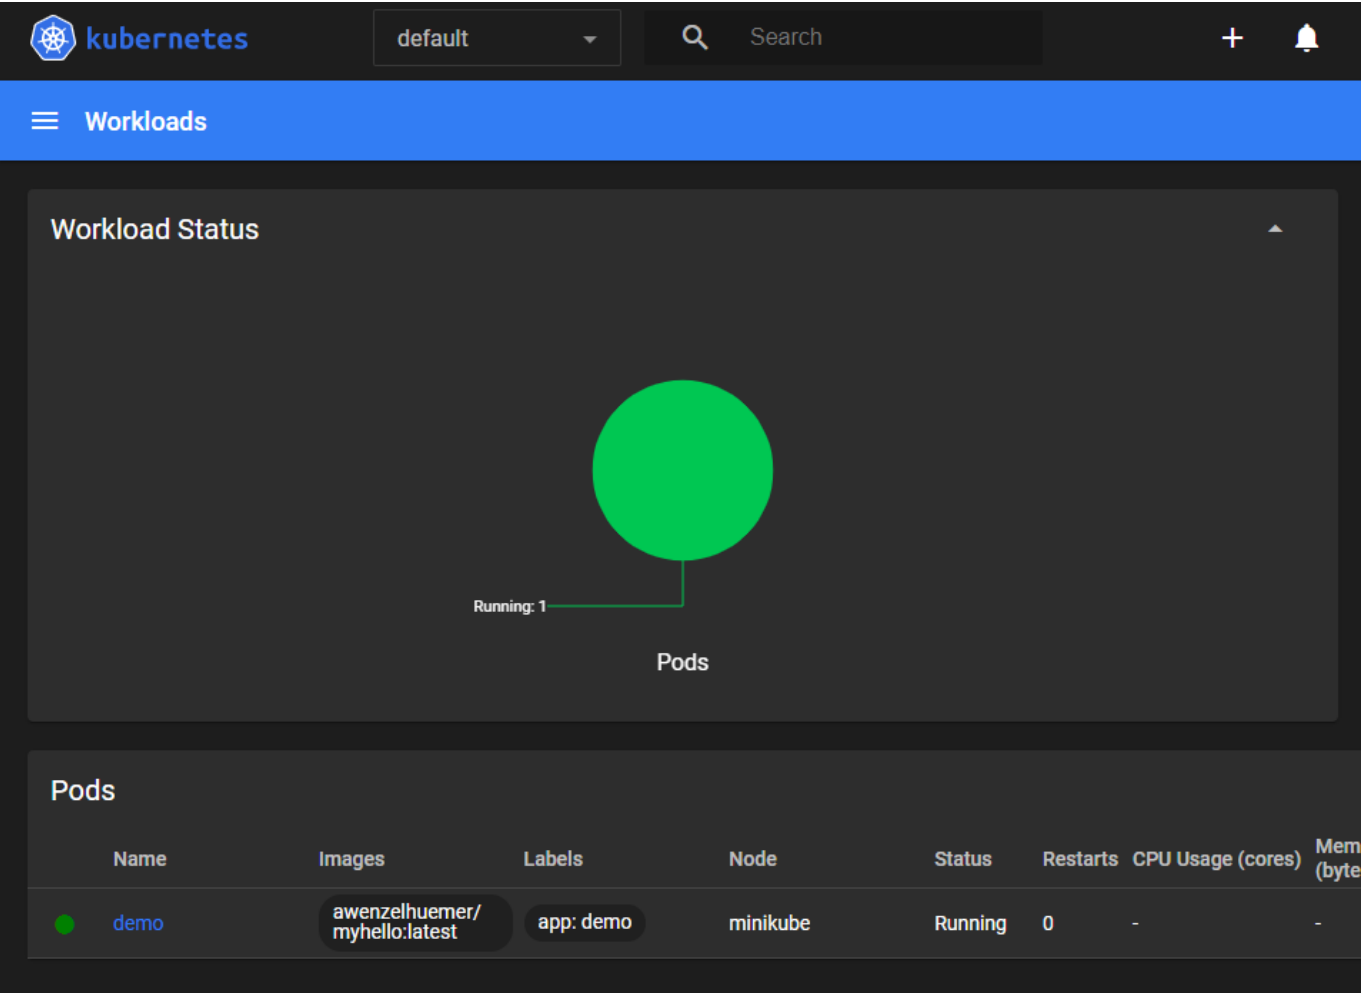

2. Verify that container started

```
kubectl get pods --selector app=demo
```

Result:

| NAME | READY | STATUS | RESTARTS | AGE |
|------|-------|---------|----------|-------|
| demo | 1/1 | Running | 0 | 3m25s |


3. Forward local port 9999 to the container port 5000

```
kubectl port-forward demo 9999:5000
```

Result:

```
Forwarding from 127.0.0.1:9999 -> 8888
Forwarding from [::1]:9999 -> 8888
Handling connection for 9999
```

Application which runs on port 8888 gets redirect to local port 9999.

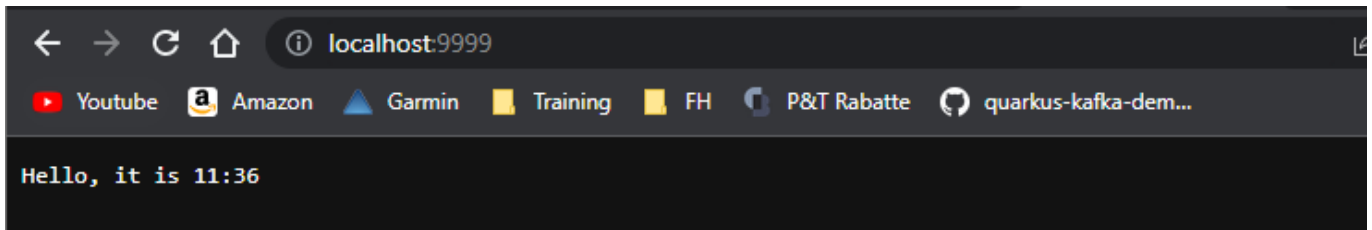

4. Delete the pod

```
kubectl delete pod demo
```

Result:

```
pod "demo" deleted
```

Part 3

1. Apply the deployment to your Kubernetes cluster

```
kubectl apply -f deployment.yml
```

Result:

```
deployment.apps/demo created
```

2. See active deployments

```
kubectl get deployments
```

Result:

```
kubectl get deployments
```

3. Get more information on the demo deployment

```
kubectl describe deployment demo
```

Result:

```


Name:          demo
Namespace:     default
CreationTimestamp: Tue, 09 May 2023 13:44:11 +0200
Labels:        <none>
Annotations:   deployment.kubernetes.io/revision: 1
Selector:      app=demo
Replicas:      1 desired | 1 updated | 1 total | 1 available | 0
unavailable
StrategyType:  RollingUpdate
MinReadySeconds: 0
RollingUpdateStrategy: 25% max unavailable, 25% max surge
Pod Template:
  Labels:  app=demo
  Containers:
    demo:
      Image:          awenzelhuemer/myhello:latest
      Port:           80/TCP
      Host Port:      0/TCP
      Environment:    <none>
      Mounts:          <none>
      Volumes:         <none>
Conditions:
  Type           Status  Reason
  ----           -
  Available      True    MinimumReplicasAvailable
  Progressing    True    NewReplicaSetAvailable
OldReplicaSets: <none>
NewReplicaSet:  demo-57fd987b7b (1/1 replicas created)
Events:
  Type           Reason              Age   From                      Message
  ----           -
  Normal        ScalingReplicaSet   25s   deployment-controller     Scaled up replica set
demo-57fd987b7b to 1

```

4. Forward local port 9999 to the container port 8888

```
kubect1 port-forward deployment/demo 9999:8888
```

Result:

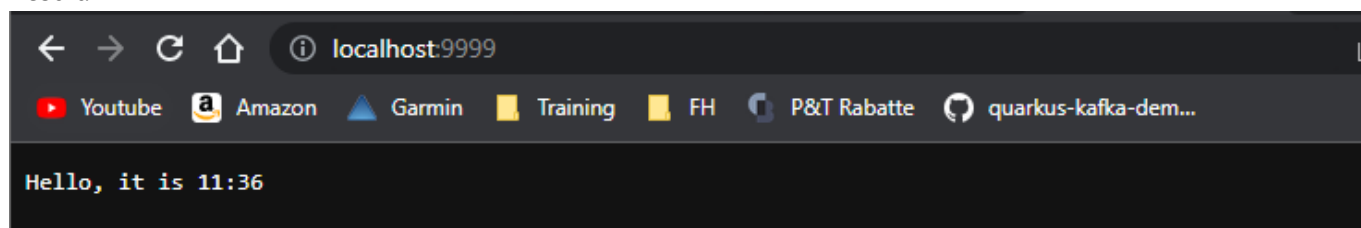

5. Query the pods of your deployment with

```
kubectl get pods
```

Result:

| NAME | READY | STATUS | RESTARTS | AGE |
|-----------------------|-------|---------|----------|-------|
| demo-57fd987b7b-f98tw | 1/1 | Running | 0 | 7m39s |

6. Delete the pod

```
kubectl delete pod --selector app=demo
```

Result:

```
pod "demo-57fd987b7b-f98tw" deleted
```

7. Query again

```
kubectl get pods
```

Result:

Replica set is still running

| NAME | READY | STATUS | RESTARTS | AGE |
|-----------------------|-------|---------|----------|-----|
| demo-57fd987b7b-8ks2w | 1/1 | Running | 0 | 59s |

Part 4

1. Apply the service to your Kubernetes cluster

```
kubectl apply -f service.yml
```

Result:

```
service/demo created
```

2. Describe service

```
kubectl describe service demo
```


Result:

```
Name:                demo
Namespace:           default
Labels:              <none>
Annotations:         <none>
Selector:            app=demo
Type:                LoadBalancer
IP Family Policy:    SingleStack
IP Families:         IPv4
IP:                  10.96.231.25
IPs:                 10.96.231.25
LoadBalancer Ingress: 127.0.0.1
Port:                <unset> 80/TCP
TargetPort:          8888/TCP
NodePort:            <unset> 32199/TCP
Endpoints:           10.244.0.9:8888
Session Affinity:    None
External Traffic Policy: Cluster
Events:              <none>
```


3. Start tunnel

```
minikube tunnel
```

☒ Tunnel erfolgreich gestartet


 ACHTUNG: Schließen Sie dieses Terminal nicht. Der Prozess muss am Laufen bleiben, damit die Tunnels zugreifbar sind ...

! Access to ports below 1024 may fail on Windows with OpenSSH clients older than v8.1. For more information, see:
<https://minikube.sigs.k8s.io/docs/handbook/accessing/#access-to-ports-1024-on-windows-requires-root-permission>

 Start Tunnel für den Service demo

4. Open application with LoadBalancer

Balancer Ingress: 127.0.0.1

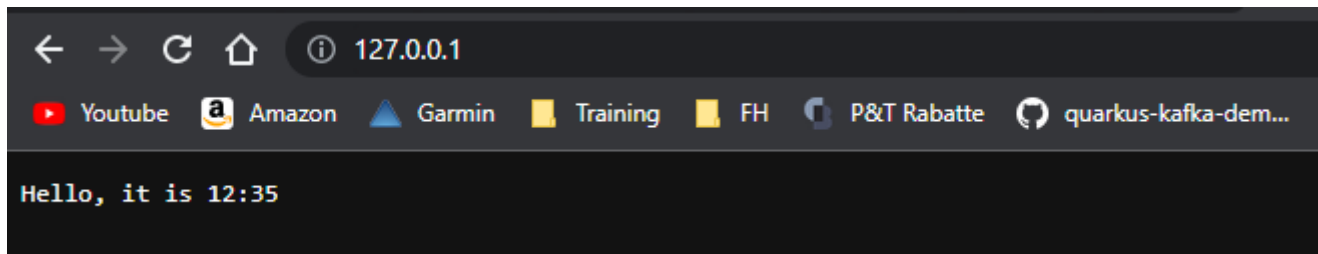

Part 5

1. Apply namespace to your Kubernetes cluster

```
kubectl apply -f namespace.yml
```

Result:

```
namespace/demo-environment created
```

2. Query namespaces

```
kubectl get namespaces
```

Result:

| NAME | STATUS | AGE |
|----------------------|--------|-----|
| default | Active | 66m |
| demo-environment | Active | 59s |
| kube-node-lease | Active | 66m |
| kube-public | Active | 66m |
| kube-system | Active | 66m |
| kubernetes-dashboard | Active | 65m |

3. Apply deployment to namespace

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: demo
  namespace: demo-environment
spec:
  replicas: 1
  selector:
    matchLabels:
      app: demo
```

```
template:
  metadata:
    labels:
      app: demo
  spec:
    containers:
      - name: demo
        image: awenzelhuemer/myhello:latest
        ports:
          - containerPort: 80
```

4. Apply the modified deployment

```
kubectl apply -f deployment.yml
```

5. Check resources in demo-environment

```
kubectl get deployments --namespace demo-environment
```

Result:

| NAME | READY | UP-TO-DATE | AVAILABLE | AGE |
|------|-------|------------|-----------|-----|
| demo | 1/1 | 1 | 1 | 49s |

```
kubectl get pods --namespace demo-environment
```

Result:

| NAME | READY | STATUS | RESTARTS | AGE |
|-----------------------|-------|---------|----------|-----|
| demo-57fd987b7b-hjj2f | 1/1 | Running | 0 | 58s |