

ServiceOps user guide

Version 2026 edition


Contents

Who does what	2
Signing in	2
Finding your way around	2
The dashboard	3
Working with tickets	4
Report and resolve an incident	4
Submit a change through approval	6
Order something from the catalog	7
Everything outstanding, in one place	9
Approvals	11
Review team performance as a manager	12
Analytics	14
Notifications	16
Knowledge base	16
CMDB and service map	17
For administrators	19
Installing, upgrading, and backing up	25

This guide covers everyday use of ServiceOps: signing in, working with tickets, the service catalog, approvals, and every major screen. Deployment, security hardening, and upgrade procedures are covered separately in the deployment guide — this manual is for people using the product, not installing it.

System architecture

One PostgreSQL database and one worker process serve every application replica.

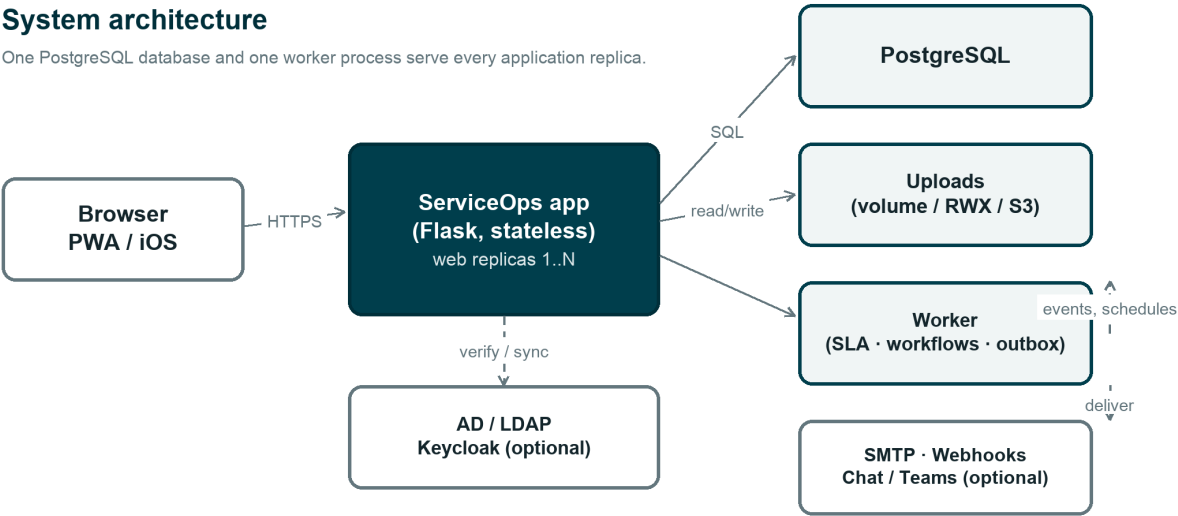

System architecture: browser and iOS clients call the stateless Flask application over HTTPS; the application reads and writes PostgreSQL and the uploads store, and hands scheduled/event work to a worker process that delivers notifications, SLA breaches, and workflow automation, with AD/LDAP, Keycloak, SMTP, webhooks, and chat integrations as optional adapters.

Who does what

Role	Can do
Requester	Submit and track requests and incidents, search knowledge
Agent	Triage, assign, fulfill, and resolve operational work
Manager	Everything an agent can, plus team oversight and approvals
CCB member	Review and approve planned changes
Administrator	Configure identity, teams, catalog, and platform settings

Every incident, request, and change belongs to one owning team. Only an active member of that team (or their manager, or an administrator) can change it — other teams can view it for awareness, but can't edit it. Someone with more than one role can switch which one is active from the **Acting as** control under their name in the sidebar.

Signing in

The sign-in page shows whichever methods your administrator has enabled: single sign-on (Keycloak), a company directory account (AD/LDAP), or a local account. If both directory and local sign-in are available, a dropdown lets you pick. Directory usernames work in any familiar form — `jsmith`, `jsmith@company.com`, or `CORP\jsmith`.

Finding your way around

The left sidebar groups everything into **Home**, **My work**, **Self-service**, **Management**, **Operations**, and **Administration**. Opening one section closes the previous one, and the section containing whatever page you're on opens automatically. Use **Find menu** at the top of the sidebar to jump straight to a module by typing part of its name.

The search bar in the top bar searches across tickets, requests, knowledge articles, configuration items, and more at once — not just navigation.

Click your name at the bottom of the sidebar to edit your profile, switch role (if you have more than one), or sign out.

The dashboard

The ServiceOps dashboard features a dark sidebar on the left with navigation links: Home, My Workspace, Client management (12), My work, Self-service, Management, Operations, and Administration. The main content area has a top bar with a search bar and user profile. Below this, the dashboard is divided into several sections:


- SERVICE OPERATIONS** header with a greeting "Good day, System" and a "Report an incident" button.
- Stat Tiles:** Four tiles showing key metrics: Incidents (6), Requests (1), Changes (3), and Open work (7). Each tile has a link to view the queue or schedule.
- Assigned to me:** A section showing open tickets where the user is the assignee. Currently, nothing is assigned.
- SLA breached:** A section titled "These need escalation now" showing a table of breached SLAs.
- Recently updated:** A section titled "Your latest service activity" showing a table of recently updated tickets.

NUMBER	SUMMARY	BREACHED AT
CHG0000002	test	Aug 10, 21:42
CHG0003623	E2E CSRF Bug Verification Change	Aug 10, 21:43
INC0003627	test	Aug 15, 09:18

NUMBER	SUMMARY	STATE	PRIORITY	UPDATED
INC0009049	Sanity check	New	P4	Aug 19, 21:40
INC0003628	Sanity check	New	P4	Aug 19, 21:40
INC0003627	test	New	P3	Aug 14, 09:18
INC0003626	iOS app API verification	In Progress	P3	Aug 14, 08:03
CHG0000002	test	In Progress	P3	Aug 14, 01:10
CHG0003624	E2E CSRF Bug Verification Change	Resolved	P1	Aug 14, 01:03
INC0003625	Verify B-203 task lifecycle	Resolved	P3	Aug 12, 21:11
CHG0003623	E2E CSRF Bug Verification Change	New	P3	Aug 09, 21:43

The ServiceOps dashboard: stat tiles for Incidents, Requests, Changes and Open work across the top, followed by Assigned to me, SLA breached, SLA at risk and Recently updated panels.

The dashboard is your landing page after sign-in. The stat tiles across the top link straight into the matching filtered list, and the Incidents tile turns red whenever a high-priority incident is open. Below that: **Assigned to me** lists your own open tickets by priority, **SLA breached/SLA at risk** only show up when something needs attention, and **Recently updated** shows the last records touched across everything you can see — handy for picking back up after a context switch.

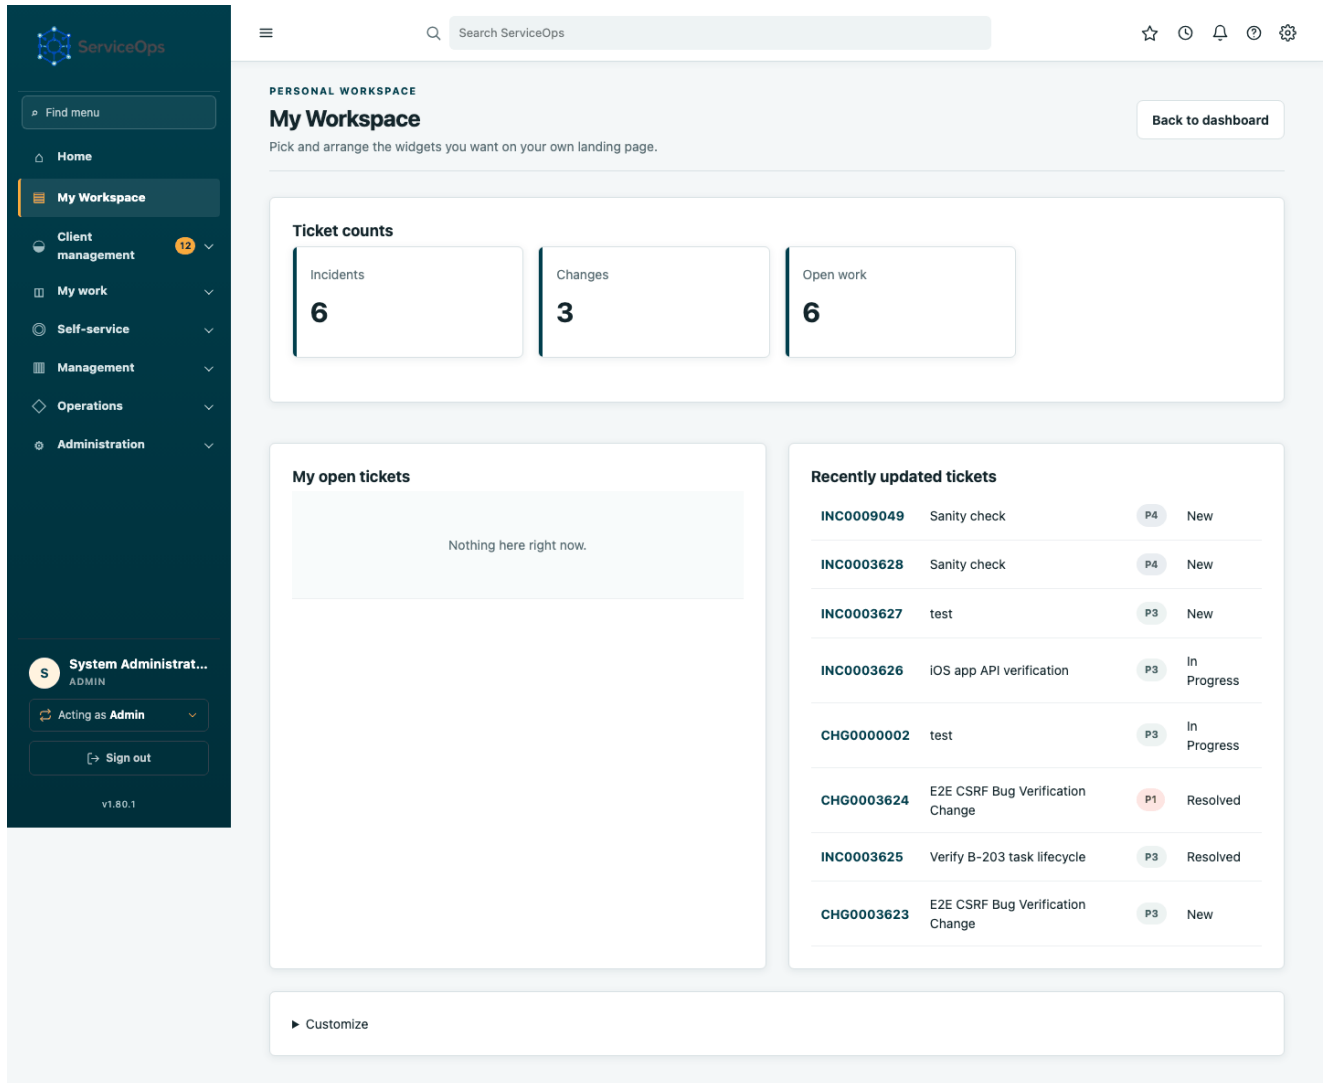

My Workspace: a per-user, drag-configurable landing page built from widgets -- ticket stats, my open tickets, recent tickets, SLA-at-risk, approvals awaiting me, favorites, recently viewed, and notifications.

My Workspace (/workspace) is a personal alternative to the shared dashboard — pick which widgets you want and lay them out however suits you.

Working with tickets

Report and resolve an incident

1. Click **+ Report an incident** on the dashboard, or **New** from the Incidents list.
2. Give it a concise title, describe the symptoms, and set business impact/urgency — ServiceOps calculates priority from those automatically.
3. Submit. The incident starts in state **New** and routes to its owning team.
4. An agent from that team sets it **In Progress** and works the issue — comments, attachments, and CI links all land in the Event history as they happen.
5. Once service is restored, the agent sets it **Resolved**; it moves to **Closed** once confirmed with the caller.

- Find menu
- Home
- My Workspace
- Client management 12
- My work**
 - Visual task board
 - My tasks
 - Incidents**
 - Service requests
 - Changes
 - My approvals
 - Notifications
 - Organization chart
- Self-service
- System Administrator ADMIN
 - Acting as Admin
 - [> Sign out]

☆ ⌚ 🔔 ⓘ ⚙️

Incidents

6 records

New
 ↓ CSV
 Print
 Number or short description
 Search
 Filter

< Page 1 of 1 >

#	NUMBER	OPENED	SHORT DESCRIPTION	CALLER	PRIORITY	STATE	CATEGORY	ASSIGNMENT GROUP	ASSIGNED TO	UPDATED
	INC0009049	2026-08-19 21:40	Sanity check	System Administrator	P4	New	General	CoreApps	Unassigned	2026-08-19 21:40
	INC0003628	2026-08-19 21:40	Sanity check	System Administrator	P4	New	General	CoreApps	Unassigned	2026-08-19 21:40
	INC0003627	2026-08-14 09:18	test	System Administrator	P3	New	General	Unix	Unassigned	2026-08-14 09:18
	INC0003626	2026-08-14 00:56	iOS app API verification	System Administrator	P3	In Progress	Software	Network	Unassigned	2026-08-14 08:00
	INC0003625	2026-08-12 21:10	Verify B-203 task lifecycle	System Administrator	P3	Resolved	Software	CoreApps	Unassigned	2026-08-12 21:11
	INC0000001	2026-07-31 19:01	test	System Administrator	P3	Closed	General	Network	Unassigned	2026-07-01 22:38

The Incidents list workspace: a searchable, filterable, paginated table with Number, Opened, Short description, Caller, Priority, State, Category, Assignment group, Assigned to and Updated columns.

Every ticket list (Incidents, Changes, Requests) works the same way: a **New** button, a state filter, free-text search, and pagination. Rows are sorted newest-updated first, with a small dot marking priority (red for P1, amber for P2). Click any row to open it.

Incident INC0009049 Updated Aug 19, 21:40 [Update](#) [Resolve](#)

New In Progress Pending Resolved Closed

Number: INC0009049 Contact type: Self-service

* Caller: System Administrator · admin@example.loc State: New

Category: General Impact: Low

Subcategory: Urgency: Low

Service offering: Not selected Priority: P4

Configuration item: Search configuration items... Notify: Email

* Assignment group: CoreApps Team manager: Not assigned Assigned to: Unassigned

* Short description: Sanity check

* Description: one off

Priority override reason: Required when overriding calculated priority

[Update incident](#)

Notes Related records Affected CIs Resolution information Major incident Attachments (0) Event history

Activity and work notes
Conversation and resolution evidence
No comments yet.
Add a work note or comment...
Attach a file (optional) [Choose File](#) No file chosen [Post comment](#)

Service commitments
Active SLA definitions and breach targets
No active service commitments.

► Reassign incident to another team


An open incident record: a lifecycle stepper (New → In Progress → Pending → Resolved → Closed) across the top, a two-column form with State, Priority, Category, Assignment group and Assigned to fields, and an Event history timeline below.

Every record type uses this same layout: a lifecycle stepper showing where it is, a two-column form for its fields, and an Event history below recording every change with who made it and when.

Submit a change through approval

1. Open **New change**, pick the type (Standard/Normal/Emergency), and name the affected configuration item(s).
2. Fill in risk/impact, the planned window, and implementation, test, and backout plans.
3. Submit — the change enters **Awaiting Approval** and routes to the relevant manager and CCB.
4. Once every required approval is in, the change moves to **Approved** and can be scheduled and implemented.

Normal change governance flow



material change → invalidates approvals, restarts at Draft

Scope, plan, risk, affected CIs, schedule, or assignment-group changes after approval reopen the record at the pre-approval gate and start a new approval cycle.

Normal change governance flow: Draft, then Team or manager approval, then CCB approval, then Approved, then Implementation with change tasks, then Post-implementation review. A material change made after Approved -- to scope, plan, risk, affected CIs, schedule, or assignment group -- invalidates the current approval chain and restarts the record at Draft.


Editing an already-approved change's scope, plan, risk, or affected systems resets it to **Draft** and starts a new approval cycle — this keeps the approved record honest, so approving a change always means approving what actually gets implemented.

The screenshot shows the ServiceOps interface. On the left is a dark sidebar with navigation options: Home, My Workspace, Client management (12), My work, Visual task board, My tasks, Incidents, Service requests, Changes (selected), My approvals, Notifications, Organization chart, Self-service, and System Administrator (ADMIN). The main area displays the 'Changes' list workspace with 3 records. It includes a search bar, 'New', 'CSV', 'Print', and 'Filter' buttons. The table below shows three records with columns: NUMBER, OPENED, SHORT DESCRIPTION, CALLER, PRIORITY, STATE, CATEGORY, ASSIGNMENT GROUP, ASSIGNED TO, and UPDATED.

NUMBER	OPENED	SHORT DESCRIPTION	CALLER	PRIORITY	STATE	CATEGORY	ASSIGNMENT GROUP	ASSIGNED TO	UPDATED
CHG00000002	2026-08-09 21:42	test	System Administrator	P3	In Progress	General	Unix	Unassigned	2026-08-14 01:10
CHG0003624	2026-08-09 21:44	E2E CSRF Bug Verification Change	System Administrator	P1	Resolved	General	Unix	Unassigned	2026-08-14 01:03
CHG0003623	2026-08-09 21:43	E2E CSRF Bug Verification Change	System Administrator	P3	New	General	Unix	Unassigned	2026-08-09 21:43


The Changes list workspace, filtered to a specific state, showing CHG-numbered records with their risk-bearing priority and assignment group columns.

Order something from the catalog

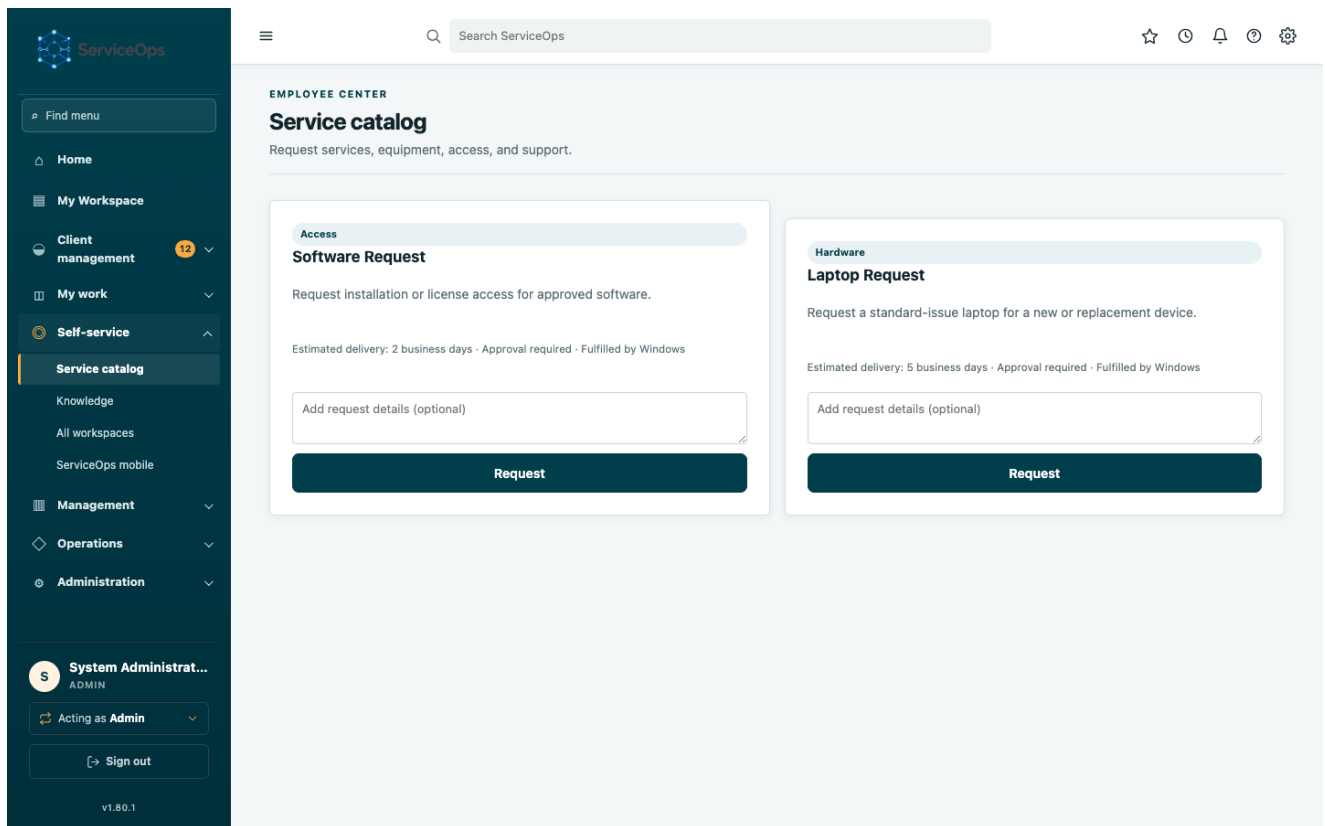

The service catalog: a grid of orderable catalog items (Laptop Request, Software Request) each with a description, estimated delivery time, approval requirement and fulfilling team, and a "Request" button.

Browse the **Service catalog**, pick an item — each card shows up front whether it needs approval and who fulfills it — fill in the form, and submit. That creates a REQ (the order) and one RITM per item ordered.

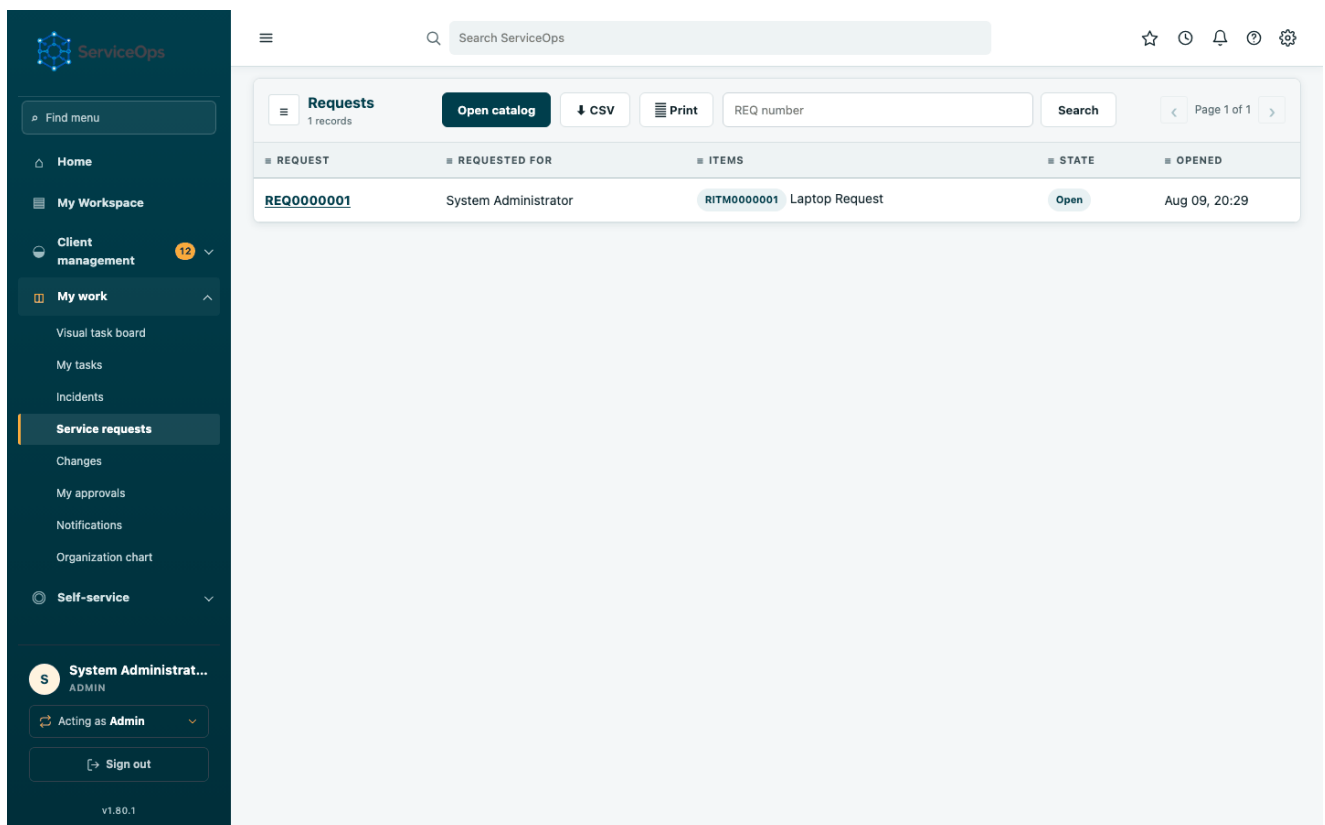

The Requests & RITMs list: REQ-numbered containers with Requested for, Items, State and Opened columns.

Track your order afterward from **Requests & RITMs**.

The screenshot displays the ServiceOps interface for a Requested Item (RITM). The left sidebar contains navigation links: Home, My Workspace, Client management (12), My work, Self-service, Management, Operations, and Administration. The user is logged in as System Administrator (ADMIN) and is acting as Admin. The main content area shows the RITM detail for RITM0000001. The lifecycle stepper indicates the RITM is currently in the 'Open' stage, having moved from 'Awaiting Approval' and 'Closed Complete'. The 'Open' stage is highlighted. The RITM details include: Number (RITM0000001), Request (REQ0000001), Item (Laptop Request), Requested for (System Administrator), Opened (Aug 09, 2026 20:29), Opened by (System Administrator), Stage (Request Approved), and Due (Not set). Below the RITM details is the 'Fulfillment tasks (SCTASK)' panel, which shows a table with one task: SCTASK0000001 - verify task, CoreApps - Unassigned, Open status, and Work notes. There is an 'Add SCTASK' button and a 'Sign out' button in the sidebar.

A RITM detail page showing its lifecycle stepper (Awaiting Approval → Open → Closed Complete), Opened/Opened by fields, and a Fulfillment tasks (SCTASK) panel below.

Opening a RITM shows its own approval → fulfillment → completion journey, plus every fulfillment task (SCTASK) needed to actually deliver it — the RITM only completes once all of those do.

Everything outstanding, in one place

ServiceOps

Find menu

Home

My Workspace

Client management12

My work

Self-service

Management

Operations

Administration

System Administrat...ADMIN

Acting as Admin

Sign out

v1.80.1

Search ServiceOps

NEEDS ATTENTION

Open work

Every incident, change, and service request that isn't resolved or closed yet.

Export CSVPrint / Save as PDF

Open incidents & changes

NUMBER	SUMMARY	STATE	PRIORITY	UPDATED
INC0003627	test	New	P3	Aug 14, 09:18
INC0003626	iOS app API verification	In Progress	P3	Aug 14, 08:03
CHG0000002	test	In Progress	P3	Aug 14, 01:10
CHG0003623	E2E CSRF Bug Verification Change	New	P3	Aug 09, 21:43
INC0009049	Sanity check	New	P4	Aug 19, 21:40
INC0003628	Sanity check	New	P4	Aug 19, 21:40

Open service requests

REQUEST	REQUESTED FOR	STATE	OPENED
REQ0000001	System Administrator	Open	Aug 09, 20:29

The Open work page: every incident, change and service request across the tenant that isn't resolved or closed yet, in one combined view.

Open work combines every unfinished incident, change, and request into one list instead of three.

ServiceOps

Find menu

Home

My Workspace

Client management12

My work

Visual task board

My tasks

Incidents

Service requests

Changes

My approvals

Notifications

Organization chart

Self-service

System Administrat...ADMIN

Acting as Admin

Sign out

v1.80.1

Search ServiceOps

WORK QUEUE

My tasks

Change, problem, event, and service catalog tasks assigned to you or your teams.

Assigned to me


NUMBER	TYPE	SUMMARY	STATE	TEAM	DUE
Nothing assigned to you right now.					

My teams' open tasks

NUMBER	TYPE	SUMMARY	STATE	TEAM	ASSIGNED TO	DUE
CTASK0000001	CHANGE	Implementation	Pending	Unix	Unassigned	Aug 09, 02:00
SCTASK0000001	SCTASK	verify task	Open	CoreApps	Unassigned	—

The My tasks page: a queue of operational tasks and catalog fulfillment tasks assigned to the signed-in user, plus a secondary list of unassigned team work.

My tasks is your personal queue — everything assigned to you, plus a second list of unclaimed team work you can pick up next. The sidebar link shows a badge whenever something's waiting.

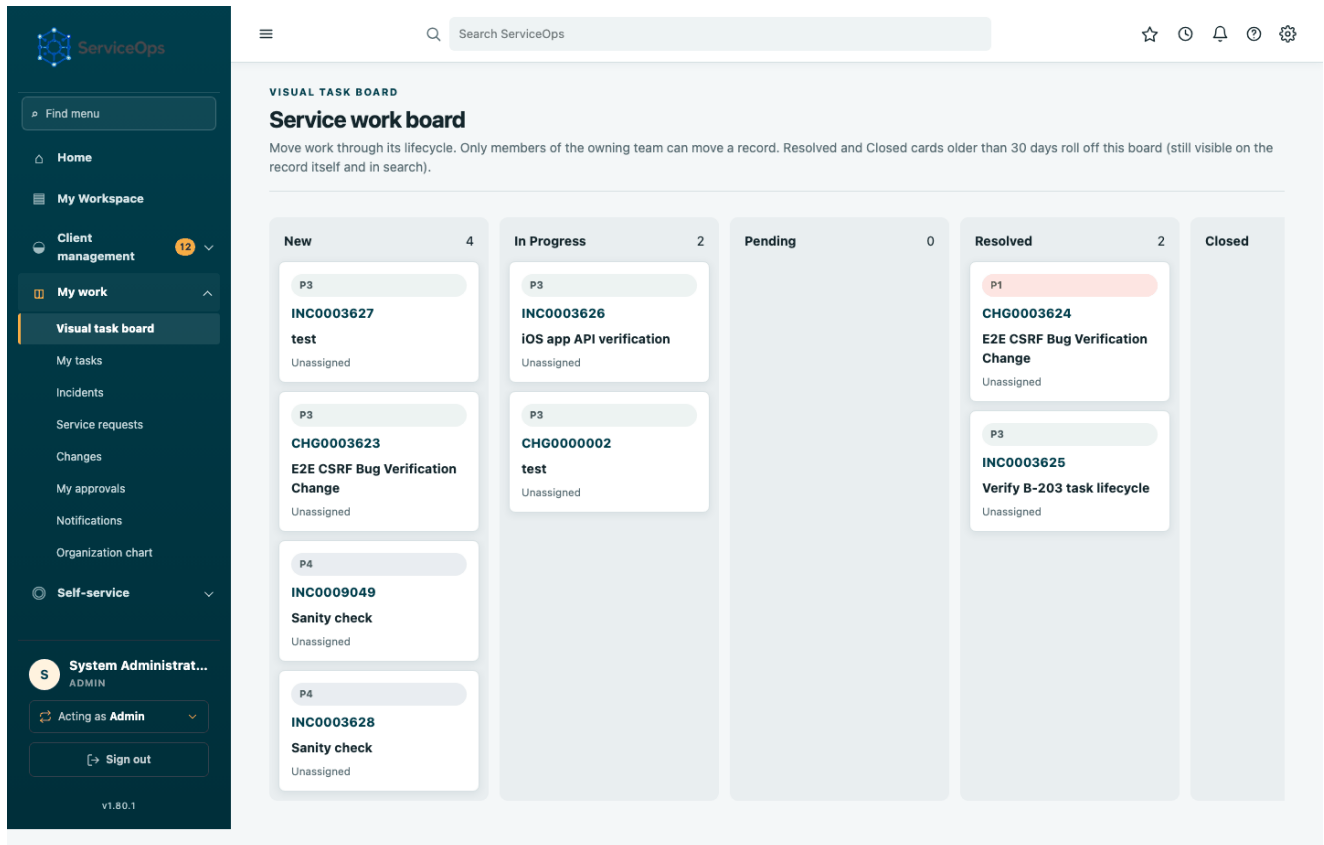

A Kanban-style visual task board with New, In Progress, Pending, Resolved and Closed lanes, each containing draggable ticket cards.

The **task board** gives the same tickets a Kanban view — dragging a card between lanes changes its state the same way editing the form would, so an invalid move (like skipping a required approval) is rejected the same way.

Approvals

Find menu

Home

My Workspace

Client management12

My work

Visual task board

My tasks

Incidents

Service requests

Changes

My approvals

Notifications

Organization chart

Self-service

System Administrat...ADMIN

Acting as Admin

Sign out

v1.80.1

Search ServiceOps

GOVERNANCE

Approval chains

Sequential and parallel decisions with complete vote history.

CHAIN	TARGET	CURRENT STAGE	STATE	CREATED
CHG0003624 change authorization v1	TICKET #3624	1 / 1	Approved	Aug 09, 21:44

The My approvals page: pending approval chains grouped by target record, each showing its gates, the votes already cast, and inline approve/reject controls for the ones waiting on the signed-in user.

If you're a manager or CCB member, **My approvals** lists everything waiting on your decision in one place, instead of you having to check every change or request individually. A sidebar badge tells you when something's there.

Review team performance as a manager

Find menu

- Home
- My Workspace
- Client management 12
- My work
- Self-service
- Management
 - Manager portal
 - Analytics
 - Operations
 - Administration

System Administrat...

ADMIN

Acting as Admin

[> Sign out]

v1.80.1

Search ServiceOps

LEADERSHIP

Manager portal

Team workload, SLA exposure and performance across the IT fulfillment teams you manage.

Export CSV

Print / Save as PDF

CoreApps

Manager: Unassigned · 0 members

0 open incidents · 0 open changes · 0 open tasks

MEMBER	STATUS	OPEN INCIDENTS	OPEN CHANGES	OPEN TASKS	RESOLVED (30D)	SLA BREACHED	SLA AT RISK
No members assigned to this team yet.							

Database

Manager: Unassigned · 0 members

0 open incidents · 0 open changes · 0 open tasks

MEMBER	STATUS	OPEN INCIDENTS	OPEN CHANGES	OPEN TASKS	RESOLVED (30D)	SLA BREACHED	SLA AT RISK
No members assigned to this team yet.							

Network

Manager: Unassigned · 0 members

0 open incidents · 0 open changes · 0 open tasks

MEMBER	STATUS	OPEN INCIDENTS	OPEN CHANGES	OPEN TASKS	RESOLVED (30D)	SLA BREACHED	SLA AT RISK
No members assigned to this team yet.							

SSD

Manager: Unassigned · 0 members

0 open incidents · 0 open changes · 0 open tasks

MEMBER	STATUS	OPEN INCIDENTS	OPEN CHANGES	OPEN TASKS	RESOLVED (30D)	SLA BREACHED	SLA AT RISK
No members assigned to this team yet.							

Unix

Manager: System Administrator · 1 member

0 open incidents · 0 open changes · 0 open tasks

MEMBER	STATUS	OPEN INCIDENTS	OPEN CHANGES	OPEN TASKS	RESOLVED (30D)	SLA BREACHED	SLA AT RISK
System Administrator Manager	Active	0	0	0	0	0	0

Windows


Manager: Unassigned · 0 members

0 open incidents · 0 open changes · 0 open tasks

MEMBER	STATUS	OPEN INCIDENTS	OPEN CHANGES	OPEN TASKS	RESOLVED (30D)	SLA BREACHED	SLA AT RISK
No members assigned to this team yet.							

The manager portal: one panel per team showing team-level open incident/change/task counts and SLA-breach totals, followed by a per-member table with status, workload and SLA columns.


Each team you manage gets its own panel in the **manager portal**: who's active, how much is open against them, what they've resolved in the last 30 days, and their SLA performance. **Export CSV** and **Print / Save as PDF** turn this straight into a report for a status meeting.

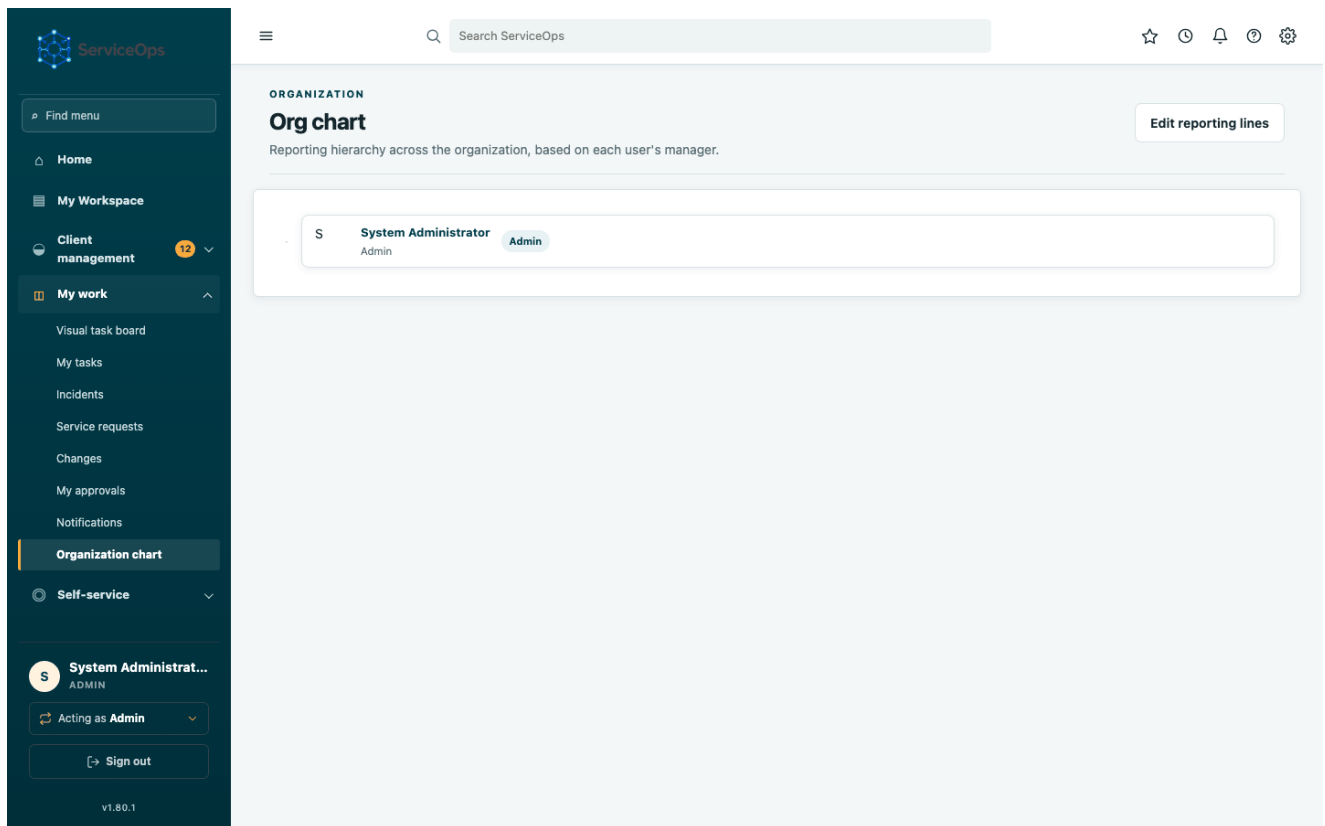

A vertically indented org chart showing manager-to-report reporting lines, with each person's name, title, department and a role badge.

The **org chart** is generated automatically from everyone's manager field — no separate data entry required.

Analytics

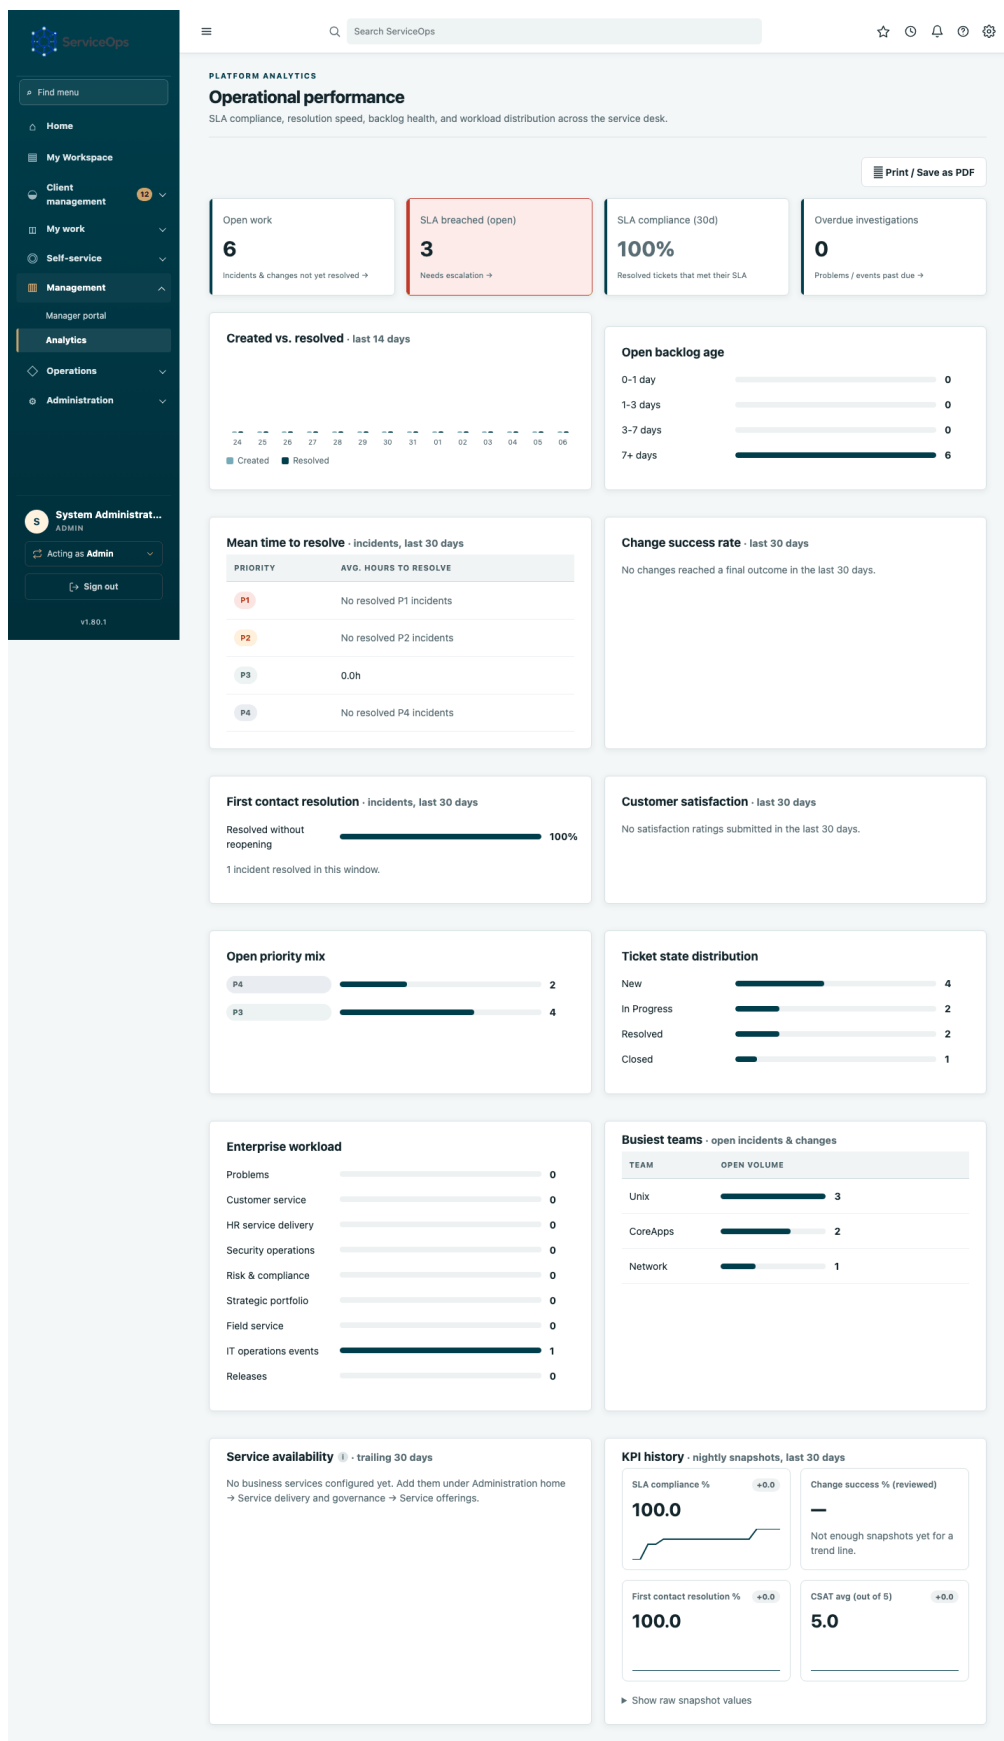


The analytics page: SLA compliance and breach/at-risk stat tiles, a 14-day created-vs-resolved trend chart, backlog aging buckets, mean-time-to-resolve by priority, change success rate, priority/state distribution bars, and a busiest-teams ranking.

This is the tenant-wide performance view. The trend chart is the fastest way to see if the backlog is growing or shrinking; backlog aging often catches problems earlier than a raw open-ticket count does; and mean-time-to-resolve

by priority is the number most worth tracking week over week.


Notifications

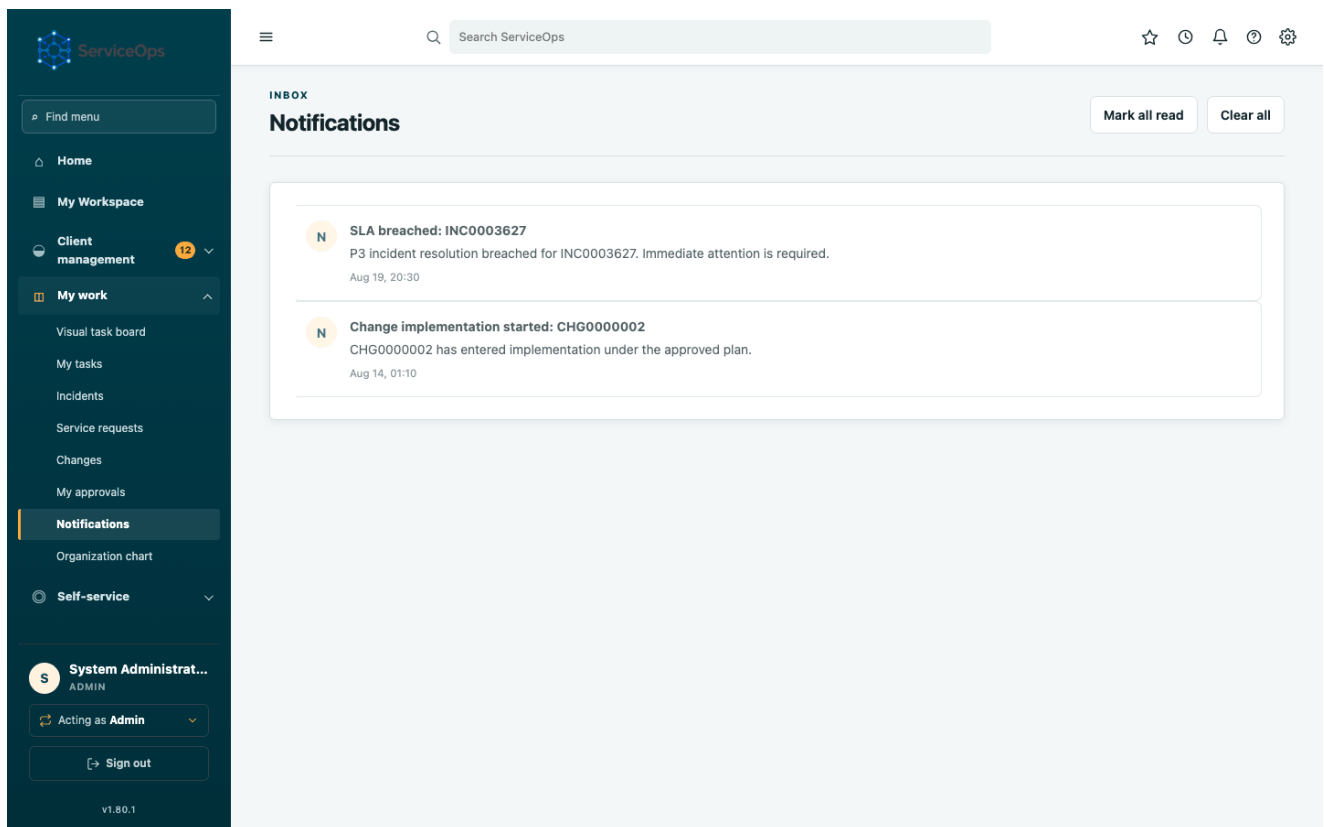

The notifications inbox: a list of system notifications with unread items visually distinguished by a colored left border and accent dot.

You're notified for things worth reacting to — an SLA breach on your ticket, a new approval request, a comment on something you're following. Unread items stay visually marked until you open the record they refer to.

Knowledge base

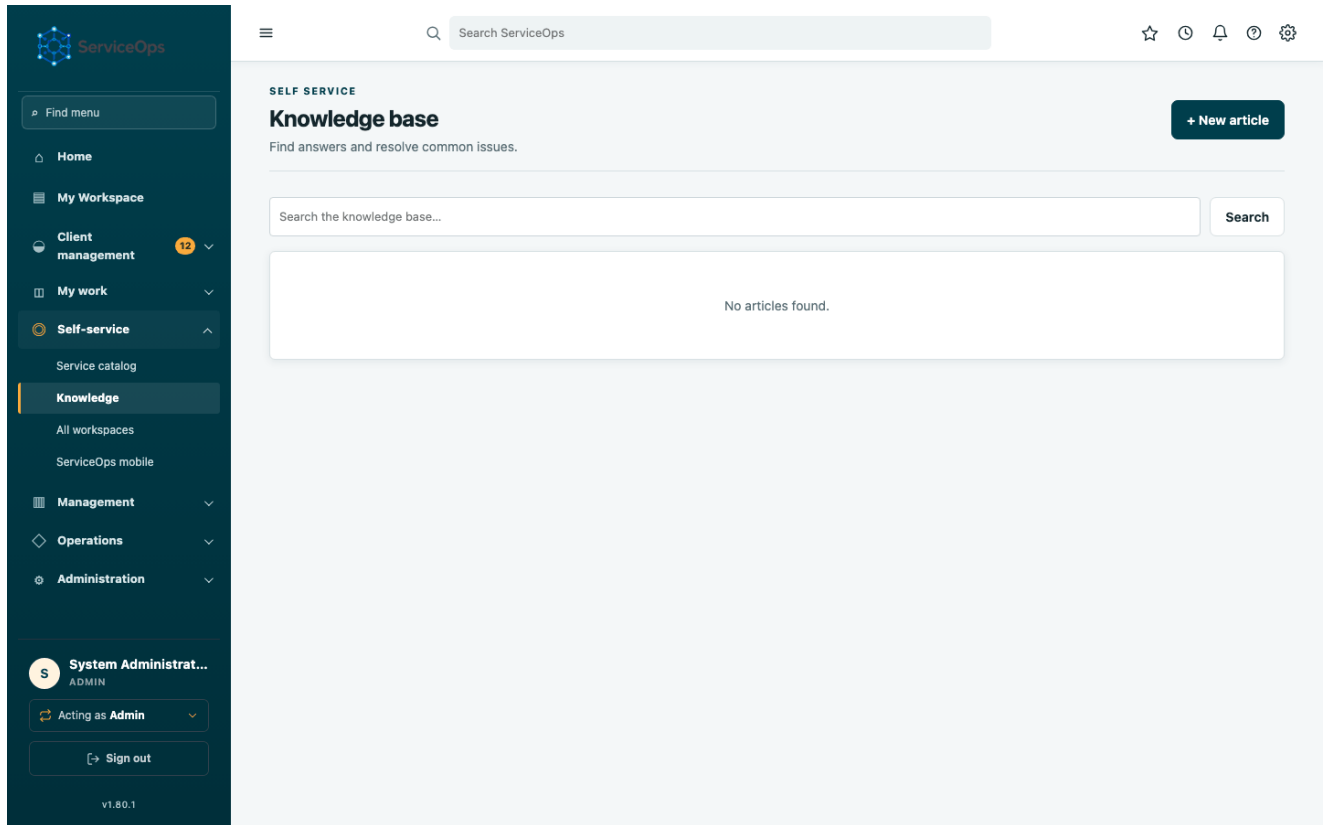

The knowledge base: a card grid of published articles with title, summary and category.

Search here before opening a ticket — a known-error article or workaround can solve the problem immediately.

CMDB and service map

ServiceOps

Find items

Home

My Workspace

Client Management

My work

Self-Service

Management

Operations

Problems

Known errors

IT operations

Improvements

CMDB & service map

Assets

System Administrator

Acting as Admin

Sign out

18.0.1

IT OPERATIONS

CMDB & service map

Configuration items and the dependencies that connect business services.

Discovery

Topology

Racks

Import

Permissions

New CI

Export CSV

Print / Save as PDF

Configuration items

Relationships

Operational

6000

0

6000

Across all classes

Mapped dependencies

View healthy CIs

Configuration items

6000 items

Name, serial, IP, model, vendor, location

Search

Filter

Page 1 of 100

Columns

ID	NAME	CLASS	ENVIRONMENT	STATUS	LIFECYCLE	CRITICALITY	LOCATION	OWNING TEAM
host00000.example.com	SN 3N000000	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00001.example.com	SN 3N000001	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00002.example.com	SN 3N000002	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00003.example.com	SN 3N000003	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00004.example.com	SN 3N000004	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00005.example.com	SN 3N000005	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00006.example.com	SN 3N000006	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00007.example.com	SN 3N000007	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00008.example.com	SN 3N000008	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00009.example.com	SN 3N000009	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00010.example.com	SN 3N000010	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00011.example.com	SN 3N000011	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00012.example.com	SN 3N000012	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00013.example.com	SN 3N000013	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00014.example.com	SN 3N000014	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00015.example.com	SN 3N000015	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00016.example.com	SN 3N000016	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00017.example.com	SN 3N000017	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00018.example.com	SN 3N000018	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00019.example.com	SN 3N000019	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00020.example.com	SN 3N000020	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00021.example.com	SN 3N000021	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00022.example.com	SN 3N000022	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00023.example.com	SN 3N000023	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00024.example.com	SN 3N000024	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00025.example.com	SN 3N000025	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00026.example.com	SN 3N000026	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00027.example.com	SN 3N000027	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00028.example.com	SN 3N000028	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00029.example.com	SN 3N000029	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00030.example.com	SN 3N000030	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00031.example.com	SN 3N000031	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00032.example.com	SN 3N000032	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00033.example.com	SN 3N000033	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00034.example.com	SN 3N000034	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00035.example.com	SN 3N000035	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00036.example.com	SN 3N000036	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00037.example.com	SN 3N000037	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00038.example.com	SN 3N000038	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00039.example.com	SN 3N000039	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00040.example.com	SN 3N000040	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00041.example.com	SN 3N000041	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00042.example.com	SN 3N000042	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00043.example.com	SN 3N000043	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00044.example.com	SN 3N000044	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00045.example.com	SN 3N000045	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00046.example.com	SN 3N000046	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00047.example.com	SN 3N000047	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00048.example.com	SN 3N000048	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned
host00049.example.com	SN 3N000049	Server	Production	Operational	In Use	Medium	CC1 / 9D-Row	Unassigned

Service relationships

No relationships mapped yet.

Add relationship

The CMDB page: a table of configuration items with Name, Class, Environment, Status, Lifecycle, Criticality, Location, Owning team and Owner columns, followed by a list of CI-to-CI relationships.

The CMDB tracks every server, application, and service, and how they depend on each other. Those relationships power conflict detection: scheduling a change against something another in-flight change already touches surfaces a

warning before approval.

For administrators

The screenshot shows the ServiceOps Platform settings page for administrators. The left sidebar contains a navigation menu with options: Home, My Workspace, Client management (12), My work, Self-service, Management, Operations, and Administration (selected). The Administration menu is expanded, showing sub-options: Administration home, User management, Service delivery & governance, and Connections & automation. The main content area is titled 'Platform settings' and includes a breadcrumb 'Administration home / Platform settings'. A description states: 'Manage organization identity and branding, sign-in and directory providers, security limits, workspace defaults, email delivery, and NetBox connections, and view the current runtime environment. Each area below is its own isolated page. Request Tracker connection settings live alongside the RT import tool under Integrations.' A 'Platform-wide configuration' note explains that these settings control the shared application experience, identity integrations, security boundaries, outbound delivery, and external data connections. The settings are organized into five sections: 'Identity and experience' (Company logo, Organization, Appearance, Sign-in and directory), 'Protection and behavior' (Security and limits, Workspace defaults, My Workspace widgets), 'Connections' (Email delivery, NetBox connection), and 'Deployment' (Runtime environment). Each setting card includes a gear icon, a title, and a brief description. The bottom of the sidebar shows the user 'System Administrator' acting as 'Admin' with a 'Sign out' button.

ServiceOps

Find menu

Home

My Workspace

Client management 12

My work

Self-service

Management

Operations

Administration

Administration home

User management

Service delivery & governance

Connections & automation

System Administrator ADMIN

Acting as Admin

Sign out

V1.80.1

Administration home / Platform settings

Platform settings

Manage organization identity and branding, sign-in and directory providers, security limits, workspace defaults, email delivery, and NetBox connections, and view the current runtime environment. Each area below is its own isolated page. Request Tracker connection settings live alongside the RT import tool under Integrations.

Platform-wide configuration These settings control the shared application experience, identity integrations, security boundaries, outbound delivery, and external data connections. Ticket, team, change, service, and SLA policies are managed under Service delivery and governance.

Identity and experience

- Company logo** PNG only, maximum 5 MB.
- Organization** Company identity, support contact, and instance-wide naming.
- Appearance** Brand colors and the default screen density for new users.
- Sign-in and directory** Local login, AD/LDAP, Keycloak, directory attributes, and synchronization.

Protection and behavior

- Security and limits** Sessions, passwords, MFA, rate limits, uploads, malware scanning, and audit streaming.
- Workspace defaults** Dashboard content and service-level warning thresholds.
- My Workspace widgets** Which widgets are available for users to add to their personal My Workspace page.

Connections

- Email delivery** SMTP connection and sender identity used for outgoing notifications.
- NetBox connection** Connection used to synchronize configuration items from NetBox.

Deployment

- Runtime environment** Deployment profile and environment-level diagnostics (read-only).

The Platform settings page: tenant-wide configuration divided into identity and experience, protection and behavior, connections, and deployment groups; each field is marked **Live** or **Restart required**.

Administration → **Platform settings** is where tenant-wide configuration lives: branding, security limits, SLA windows, LDAP/Keycloak, and more. Each field shows whether a change applies immediately (**Live**) or needs a restart to reach every running instance (**Restart required**).

- Find menu
- Home
- My Workspace
- Client management 12
- My work
- Self-service
- Management
- Operations
- Administration
 - Administration home
 - User management
 - Users**
 - Groups, teams & access
 - Roles & permissions
- System Administrator... ADMIN
 - Acting as Admin
 - Sign out

← Administration home

/ Users and access

U Users

User administration

New

Search

Filter

▼ All

7 records

USER ID	NAME	EMAIL	ACTIVE	ROLE	DEPARTMENT	TEAM MEMBERSHIPS
removed-verify-agent	Removed test identity	removed-verify-agent@invalid.local	false	agent	—	None
removed-verify-cud-agent	Removed test identity	removed-verify-cud-agent@invalid.local	false	agent	—	None
admin	System Administrator	admin@example.local	true	admin	—	Unix (manager, Manual), Change Control Board (CCB approver, Manual)
verif_blocked	Verif Blocked	verif_blocked@example.com	false	agent	—	SysOps (member, Manual)
verif_granted	Verif Granted	verif_granted@example.com	false	agent	—	SysOps (member, Manual)
removed-verify-nonsysops-agent	Verify NonSysOps Agent	verify-nonsysops-agent@test.invalid	false	agent	—	None
removed-verify-sysops-agent	Verify SysOps Agent	verify-sysops-agent@test.invalid	false	agent	—	None

v1.80.1

The Users & roles administration page: a searchable table of every user with username, name, role, department, active state and team membership, and a link into each user's editable record.

Users & roles manages accounts, roles, and team membership. Directory (AD/LDAP) accounts keep reconciling their team membership automatically on every login — editing membership here only sticks for locally-managed accounts.

The audit log: a chronological, tamper-evident table of every recorded action across the tenant — actor, action, target and timestamp.

The **audit log** records every create, update, and approval decision, cryptographically chained so tampering would be detectable — the first thing an auditor or incident responder would ask for.

Find menu

- Home
- My Workspace
- Client management 12
- My work
- Self-service
- Management
- Operations
- Administration
 - Administration home
 - User management
 - Service delivery & governance**
 - Connections & automation
- System Administrat... ADMIN

Acting as Admin

Sign out

v1.80.1

Search ServiceOps

← Administration home / Service delivery and governance

Service delivery and governance

Manage operational records for catalog routing, teams, approval authority, freeze windows, service mapping, and service commitments. Platform defaults and credentials are kept in Platform settings. Each area below is its own isolated page.

Looking for AD/LDAP group mapping or directory sync?

Those live together with the rest of the AD/LDAP connection settings under [Platform settings → Sign-in and directory](#).

Service delivery

Ticket defaults

Initial priority for new tickets and parent/child incident state sync.

Catalog and fulfillment routing

Service catalog items and which team fulfills each one by default.

People and routing

Team name aliases

Historical/imported team name spellings that safely merge into one canonical team.

Team managers

The named manager who holds change-approval authority for each team.

Executive approval (CEO)

The named user required to approve every Normal/Emergency change.

Governance groups

Review accountable groups, their type, manager, and current membership.

Change governance

Change approval policy

Which CMDB environment names require Change Control Board approval.

Change Control Board approvers

Users granted CCB voting authority for non-standard changes.

Change freeze windows

Blocks Standard/Normal change scheduling and approval during active windows.

Services and commitments

Service offerings

Map services to their supporting configuration items.

SLA definitions and business calendars

Business schedules and SLA target durations by priority.

The Service delivery and governance page: operational records for catalog routing, people and teams, change governance, service mapping, calendars, and commitments.

Service delivery and governance is where the process framework itself is configured: default catalog routing, SLA targets, business calendars, and CCB membership. Changes here govern future tickets, not ones already in flight.

ServiceOps Complete Platform Manual

Page 22

ServiceOps

Find menu

Home

My Workspace

Client management12

My work

Self-service

Management

Operations

Administration

S

System Administrat...
ADMIN

Acting as Admin

Sign out

v1.80.1

Search ServiceOps

Administration home / Guided tours

Guided tours

Contextual onboarding content shown to matching users on matching pages. Editing a tour's title, description, role/route targeting, or steps bumps its version so anyone who already dismissed it is re-prompted.

TITLE	ROUTE	ROLES	STEPS	VERSION	STATUS
No guided tours defined yet.					

Create a tour

Guided tours administration: a list of admin-authored, versioned tours with ordered steps and role targeting, plus the tour-creation form.

Guided tours lets you author step-by-step onboarding walkthroughs, scoped to specific roles, that new users see as an on-page overlay.

- Find menu
- Home
- My Workspace
- Client management 12
- My work
- Self-service
- Management
- Operations
- Administration

S System Administrator ADMIN

Acting as Admin

Sign out

V1.80.1

Search ServiceOps

[Administration home / Data governance](#)

Data governance

Data classification reference, retention policy, legal holds, and regional data notes.

Data classification

Governed statically alongside the source, not admin-editable — what counts as PII/confidential for a record type is a governance decision, not a runtime setting.

Record Type	Classification	Description
Client contact	PII	External customer name, email, phone, job title.
Client ticket	Confidential	Customer support conversations; may contain PII in free-text bodies.
Internal user	PII	Employee/agent identity and contact details.
Audit log	Confidential	Tamper-evident record of security-relevant actions. Governed separately by AuditRetentionPolicy.

Regional data note

Descriptive only — this environment does not enforce multi-region data residency. Recorded here so it's documented for audits and customer questions.

Data region

Save data region

Retention policy

Only **Client contact** is automatically enforced this pass (see the worker job's own disclosure) — records inactive past the window are erased (GDPR Art. 17 style scrub, same as an admin-triggered erasure), unless under a policy-level or per-record legal hold. Other record types can still be configured for documentation purposes.

Record Type	Retention (Days)	Legal Hold	Active	Last Run
Client contact	730	☐	Legal hold (blanket) ☒ Active	Never run Save
Client ticket	730	☐	Legal hold (blanket) ☒ Active	Never run Save
Internal user	730	☐	Legal hold (blanket) ☒ Active	Never run Save
Audit log	730	☐	Legal hold (blanket) ☒ Active	Never run Save

Run retention purge now

Legal holds

Exempts one specific record from the automatic retention purge, regardless of the policy above.

Record	Reason	Applied	By
No active legal holds.			

Record type

Client contact


Record ID

Reason

e.g. Active litigation hold, matter #4471

Apply legal hold

Data governance manages retention policies, legal holds, and export/erasure requests for client contacts.

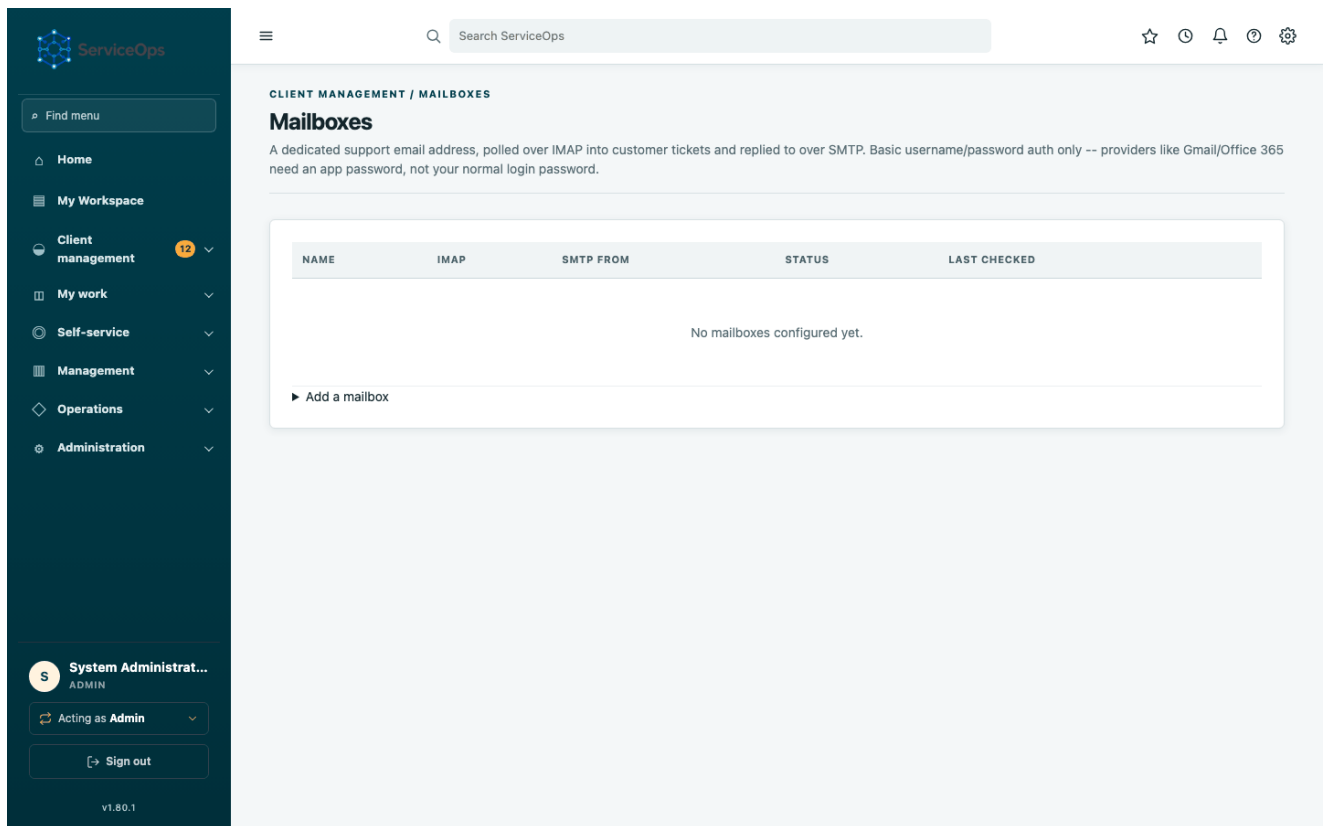

Client support mailbox administration: a list of configured IMAP/SMTP-polled inboxes with active/inactive toggles, and the mailbox-creation form.

Client support mailboxes turns a real inbox into Client tickets — inbound mail is threaded onto existing tickets or creates a new one; agent replies go back out the same way.

Installing, upgrading, and backing up

Installation, upgrades, backup/recovery, monitoring, and security hardening are covered in full in the separate deployment guide. In short:

- Install via a signed RPM (`sudo serviceops setup`), Docker Compose, or Kubernetes/Helm for production scale.
- `sudo serviceops backup / rehearse-recovery` verify backups actually restore, not just that they exist.
- `sudo serviceops rehearse-upgrade` tests a pending upgrade against a disposable copy of production data before you run it for real.
- Every release ships as a signed, immutable image with provenance — upgrades are pinned by digest, never a moving tag.

See the deployment guide for the full installation walkthrough, production checklist, and incident-response procedure.