RPractical_Edroso.Rmd.

Axel John M. Edroso

2026-11-09

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed           dist
##  Min.   : 4.0   Min.   :  2.00
##  1st Qu.:12.0   1st Qu.: 26.00
##  Median :15.0   Median : 36.00
##  Mean   :15.4   Mean   : 42.98
##  3rd Qu.:19.0   3rd Qu.: 56.00
##  Max.   :25.0   Max.   :120.00
```

Including Plots

You can also embed plots, for example:

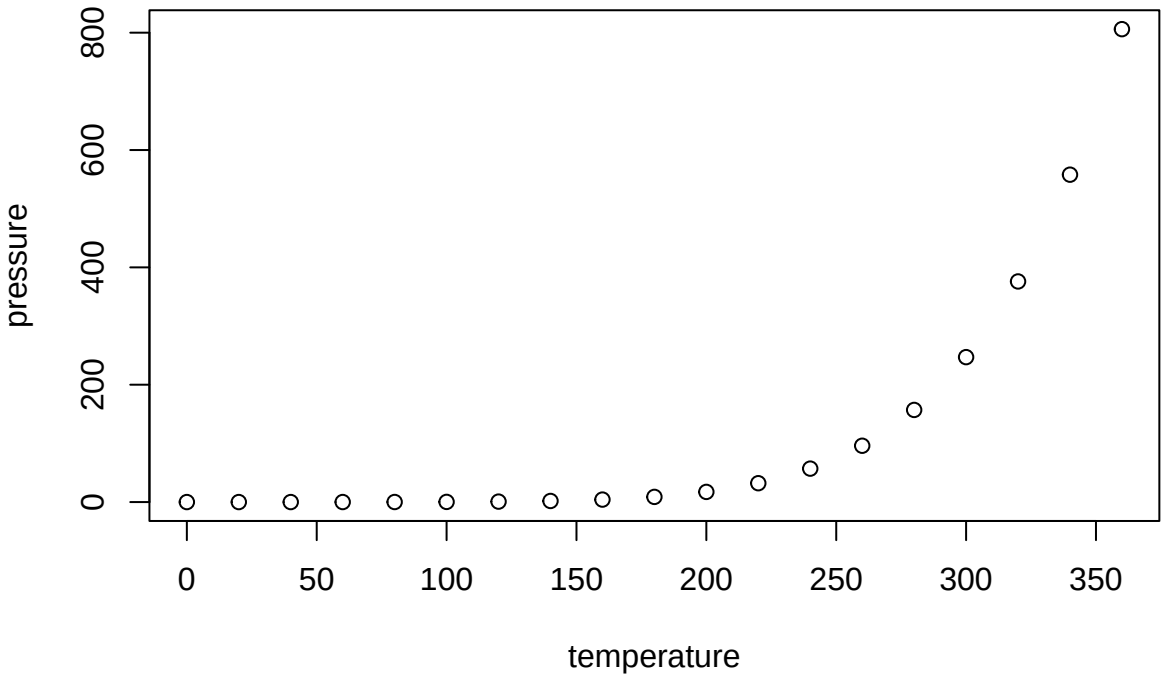

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot. A.(Basic Operation) A1

```
v<-seq(5, 50, by=5)
print(v)
```

```
##  [1]  5 10 15 20 25 30 35 40 45 50
```

```
print(length(v))
```

```
## [1] 10
```

```
print(sum(v))
```

```
## [1] 275
```

```
print(mean(v))
```

```
## [1] 27.5
```

A2

```
v<-rep(c(1,2,3), times=4)
z<-rep(c(1,2,3), each=4)

print(v)
```

```
##  [1] 1 2 3 1 2 3 1 2 3 1 2 3
```

```
print(z)
```

```
##  [1] 1 1 1 1 2 2 2 2 3 3 3 3
```

A3

```
print(17%%5)
```

```
## [1] 2
```

```
print(17%/%5)
```

```
## [1] 3
```

```
print(2^10)
```

```
## [1] 1024
```

```
print(sqrt(144))
```

```
## [1] 12
```

```
print(round(pi,3))
```

```
## [1] 3.142
```

A4

```
a<-c(2,4,6)
b<-c(3,5,7)

print(a+b)
```

```
## [1]  5  9 13
```

```r
print(a*b)
```

```
## [1]  6 20 42
```

```r
print(a>b)
```

```
## [1] FALSE FALSE FALSE
```

```r
print(sum(a*b))
```

```
## [1] 68
```

A5

```r
students <- paste("Student-",1:3,sep="")

print(students)
```

```
## [1] "Student-1" "Student-2" "Student-3"
```

```r
print(typeof(42))
```

```
## [1] "double"
```

```r
print(typeof(42L))
```

```
## [1] "integer"
```

```r
print(typeof("42"))
```

```
## [1] "character"
```

```r
print(typeof(4i))
```

```
## [1] "complex"
```

```r
print(typeof(TRUE))
```

```
## [1] "logical"
```

B.(Data Frames and Conditional Statement) B1

```r
students <- data.frame(
  id = 1:8,
  name = c("Alice", "Bruno", "Chen", "Dana",
           "Eli", "Farid", "Grace", "Hiro"),
  sex = c("F", "M", "M", "F", "F", "M", "F", "M"),
  section = c("A", "B", "A", "C", "B", "C", "A", "B"),
  midterm = c(78, 85, 92, 67, 74, 88, 95, 59),
  final = c(82, 79, 96, 71, 80, 91, 93, 65),
  attendance = c(95, 88, 100, 72, 90, 85, 98, 60),
  stringsAsFactors = FALSE
)

print(students)
```

```
##   id  name sex section midterm final attendance
## 1  1 Alice   F       A      78    82         95
## 2  2 Bruno   M       B      85    79         88
## 3  3  Chen   M       A      92    96        100
## 4  4  Dana   F       C      67    71         72
```

```
## 5  5   Eli   F       B      74    80         90
## 6  6 Farid   M       C      88    91         85
## 7  7 Grace   F       A      95    93         98
## 8  8  Hiro   M       B      59    65         60
```

B2

```
str(students)
```

```
## 'data.frame':    8 obs. of  7 variables:
##  $ id        : int  1 2 3 4 5 6 7 8
##  $ name      : chr  "Alice" "Bruno" "Chen" "Dana" ...
##  $ sex       : chr  "F" "M" "M" "F" ...
##  $ section   : chr  "A" "B" "A" "C" ...
##  $ midterm   : num  78 85 92 67 74 88 95 59
##  $ final     : num  82 79 96 71 80 91 93 65
##  $ attendance: num  95 88 100 72 90 85 98 60
```

```
dim(students)
```

```
## [1] 8 7
```

```
names(students)
```

```
## [1] "id"         "name"       "sex"        "section"    "midterm"
## [6] "final"      "attendance"
```

```
summary(students)
```

```
##        id              name               sex             section     midterm
##  Min.   :1.00   Length   :8   Length   :8   Length   :8   Min.   :59.00
##  1st Qu.:2.75   N.unique :8   N.unique :2   N.unique :3   1st Qu.:72.25
##  Median :4.50   N.blank  :0   N.blank  :0   N.blank  :0   Median :81.50
##  Mean   :4.50   Min.nchar:3   Min.nchar:1   Min.nchar:1   Mean   :79.75
##  3rd Qu.:6.25   Max.nchar:5   Max.nchar:1   Max.nchar:1   3rd Qu.:89.00
##  Max.   :8.00                                           Max.   :95.00
##      final         attendance
##  Min.   :65.00   Min.   : 60.00
##  1st Qu.:77.00   1st Qu.: 81.75
##  Median :81.00   Median : 89.00
##  Mean   :82.12   Mean   : 86.00
##  3rd Qu.:91.50   3rd Qu.: 95.75
##  Max.   :96.00   Max.   :100.00
```

B3

```
students$average <- round(
  rowMeans(students[, c("midterm", "final")]),
  1
)

print(students)
```

```
##   id  name sex section midterm final attendance average
## 1  1 Alice   F       A      78    82         95    80.0
## 2  2 Bruno   M       B      85    79         88    82.0
## 3  3  Chen   M       A      92    96        100    94.0
## 4  4  Dana   F       C      67    71         72    69.0
## 5  5   Eli   F       B      74    80         90    77.0
```

```
## 6  6 Farid   M       C      88    91         85    89.5
## 7  7 Grace   F       A      95    93         98    94.0
## 8  8  Hiro   M       B      59    65         60    62.0
```

B4

```
students$passed <- students$average >= 70 &
                   students$attendance >= 75

print(students)
```

```
##   id  name sex section midterm final attendance average passed
## 1  1 Alice   F       A      78    82         95    80.0   TRUE
## 2  2 Bruno   M       B      85    79         88    82.0   TRUE
## 3  3  Chen   M       A      92    96        100    94.0   TRUE
## 4  4  Dana   F       C      67    71         72    69.0  FALSE
## 5  5   Eli   F       B      74    80         90    77.0   TRUE
## 6  6 Farid   M       C      88    91         85    89.5   TRUE
## 7  7 Grace   F       A      95    93         98    94.0   TRUE
## 8  8  Hiro   M       B      59    65         60    62.0  FALSE
```

B5

```
students$standing <- ifelse(
  students$average >= 90, "Honors",
  ifelse(students$average >= 75, "Good", "Needs Support")
)

print(students)
```

```
##   id  name sex section midterm final attendance average passed      standing
## 1  1 Alice   F       A      78    82         95    80.0   TRUE          Good
## 2  2 Bruno   M       B      85    79         88    82.0   TRUE          Good
## 3  3  Chen   M       A      92    96        100    94.0   TRUE        Honors
## 4  4  Dana   F       C      67    71         72    69.0  FALSE Needs Support
## 5  5   Eli   F       B      74    80         90    77.0   TRUE          Good
## 6  6 Farid   M       C      88    91         85    89.5   TRUE          Good
## 7  7 Grace   F       A      95    93         98    94.0   TRUE        Honors
## 8  8  Hiro   M       B      59    65         60    62.0  FALSE Needs Support
```

B6

```
classify <- function(score) {
  if (score >= 85) {
    "Distinction"
  } else if (score >= 70){
    "Merit"
  } else if (score >= 50) {
    "Pass"
  } else {
    "Fail"
  }
}
print(sapply(c(90, 73, 55, 40), classify))
```

```
## [1] "Distinction" "Merit"       "Pass"        "Fail"
```

C.(rbind() and cbind()) C1

```r
new_students <- data.frame(
  id = c(9, 10),
  name = c("Ines", "Jamal"),
  sex = c("F", "M"),
  section = c("C", "A"),
  midterm = c(81, 70),
  final = c(84, 68),
  attendance = c(92, 80),
  stringsAsFactors = FALSE
)

new_students$average <- round(
  rowMeans(new_students[, c("midterm", "final")]),
  1
)

new_students$passed <- new_students$average >= 70 &
                       new_students$attendance >= 75

new_students$standing <- ifelse(
  new_students$average >= 90, "Honors",
  ifelse(new_students$average >= 75, "Good", "Needs Support")
)

students_all <- rbind(students, new_students)

print(students_all)
```

```
##    id  name sex section midterm final attendance average passed      standing
## 1   1 Alice   F       A      78    82         95    80.0   TRUE          Good
## 2   2 Bruno   M       B      85    79         88    82.0   TRUE          Good
## 3   3  Chen   M       A      92    96        100    94.0   TRUE        Honors
## 4   4  Dana   F       C      67    71         72    69.0  FALSE Needs Support
## 5   5   Eli   F       B      74    80         90    77.0   TRUE          Good
## 6   6 Farid   M       C      88    91         85    89.5   TRUE          Good
## 7   7 Grace   F       A      95    93         98    94.0   TRUE        Honors
## 8   8  Hiro   M       B      59    65         60    62.0  FALSE Needs Support
## 9   9  Ines   F       C      81    84         92    82.5   TRUE          Good
## 10 10 Jamal   M       A      70    68         80    69.0  FALSE Needs Support
```

```r
print(class(students_all))
```

```
## [1] "data.frame"
```

C2

```r
quiz <- c(8, 7, 10, 6, 7, 9, 10, 5, 8, 6)

students_all <- cbind(students_all, quiz = quiz)

print(students_all)
```

```
##    id  name sex section midterm final attendance average passed      standing
## 1   1 Alice   F       A      78    82         95    80.0   TRUE          Good
## 2   2 Bruno   M       B      85    79         88    82.0   TRUE          Good
## 3   3  Chen   M       A      92    96        100    94.0   TRUE        Honors
```

```
## 4   4  Dana   F       C      67    71         72    69.0  FALSE Needs Support
## 5   5   Eli   F       B      74    80         90    77.0   TRUE          Good
## 6   6 Farid   M       C      88    91         85    89.5   TRUE          Good
## 7   7 Grace   F       A      95    93         98    94.0   TRUE        Honors
## 8   8  Hiro   M       B      59    65         60    62.0  FALSE Needs Support
## 9   9  Ines   F       C      81    84         92    82.5   TRUE          Good
## 10 10 Jamal   M       A      70    68         80    69.0  FALSE Needs Support
##    quiz
## 1     8
## 2     7
## 3    10
## 4     6
## 5     7
## 6     9
## 7    10
## 8     5
## 9     8
## 10    6
```

```
print(class(students_all))
```

```
## [1] "data.frame"
```

C3

```
m <- cbind(midterm = students_all$midterm, final = students_all$final)
m <- rbind(m, mean = colMeans(m))
print(m)
```

```
##      midterm final
##         78.0  82.0
##         85.0  79.0
##         92.0  96.0
##         67.0  71.0
##         74.0  80.0
##         88.0  91.0
##         95.0  93.0
##         59.0  65.0
##         81.0  84.0
##         70.0  68.0
## mean    78.9  80.9
```

C4

```
bad <- data.frame(id = 11, nm = "Zed")
tryCatch(rbind(students, bad),
         error = function(e) {message("rbind failed:", conditionMessage(e)); NULL})
```

```
## rbind failed:numbers of columns of arguments do not match
```

```
## NULL
```