Лабораторная работа №9

Настройка POP3/IMAP сервера

Акунаева Антонина Эрдниевна

2026-10-31

Российский университет дружбы народов, Москва, Россия

Информация

Докладчик

- Акунаева Антонина Эрдниевна
- студент ФФМиЕН, НПИбд-02-24
- Российский университет дружбы народов
- 1032240492@rudn.ru
- https://github.com/Akuxee



Цели и задачи

Цели и задачи

- Приобретение практических навыков по установке и простейшему конфигурированию POP3/IMAP-сервера.

1. Установите на виртуальной машине server Dovecot и Telnet для дальнейшей проверки корректности работы почтового сервера (см. раздел 9.4.1).

2. Настройте Dovecot (см. раздел 9.4.2).

3. Установите на виртуальной машине client программу для чтения почты Evolution и настройте её для манипуляций с почтой вашего пользователя. Проверьте корректность работы почтового сервера как с виртуальной машины server, так и с виртуальной машины client (см. раздел 9.4.3).

4. Измените скрипт для Vagrant, фиксирующий действия по установке и настройке Postfix и Dovecote во внутреннем окружении виртуальной машины server, создайте скрипт для Vagrant, фиксирующий действия по установке Evolution во внутреннем окружении


Материалы и методы

Материалы и методы


- Linux (дистрибутив Rocky 10.2)
- Linux Fedora Workstation (Markdown)
- Oracle VirtualBox 7.2.16
- Vagrant 2.4.9 (Windows amd64)
- Dovecot
- Postfix
- Telnet

Выполнение лабораторной работы


Установка dovecot и telnet

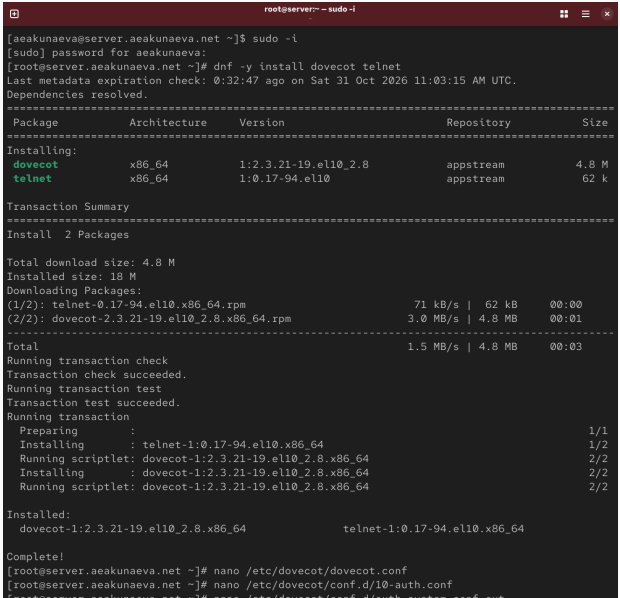


Конфигурационный файл /etc/dovecot/dovecot.conf

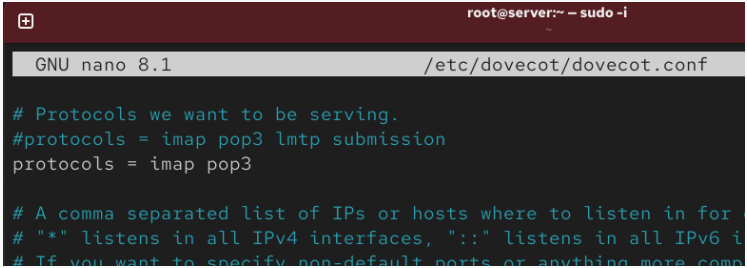


Конфигурационный файл /etc/dovecot/conf.d/10-auth.conf

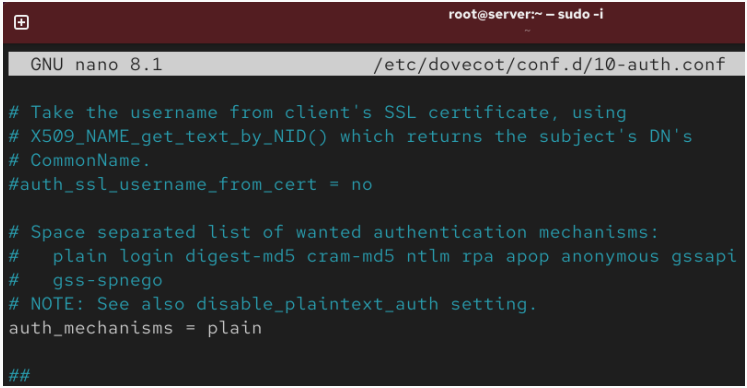


Конфигурационный файл /etc/dovecot/conf.d/auth-system.conf.ext

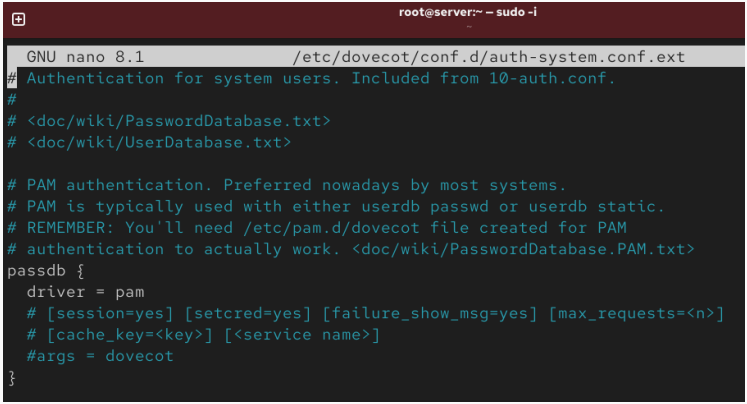


Конфигурационный файл /etc/dovecot/conf.d/auth-system.conf.ext

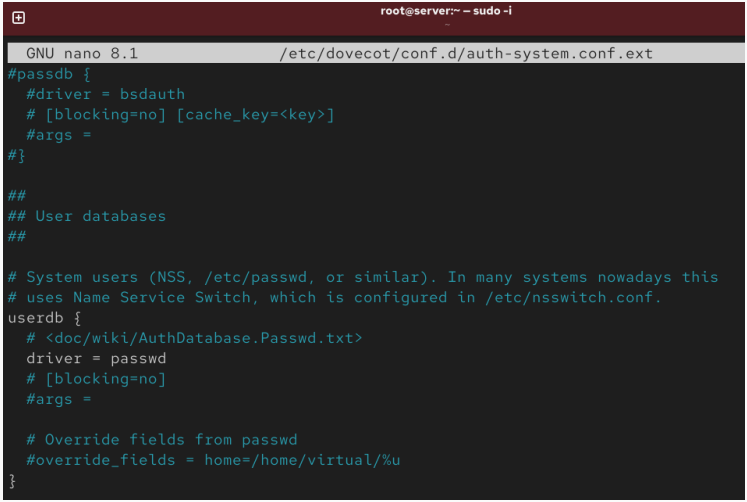

Конфигурационный файл /etc/dovecot/conf.d/10-mail.conf

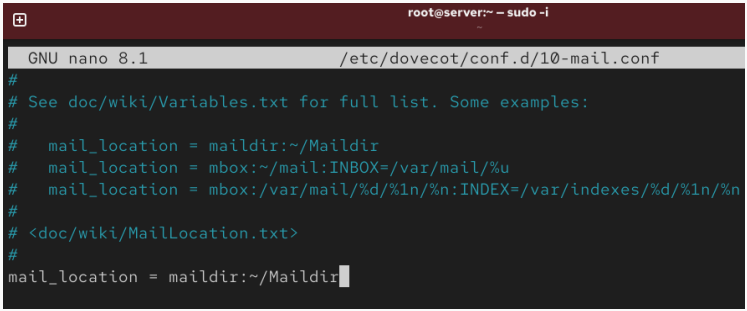

Задание каталога доставки почты Postfix

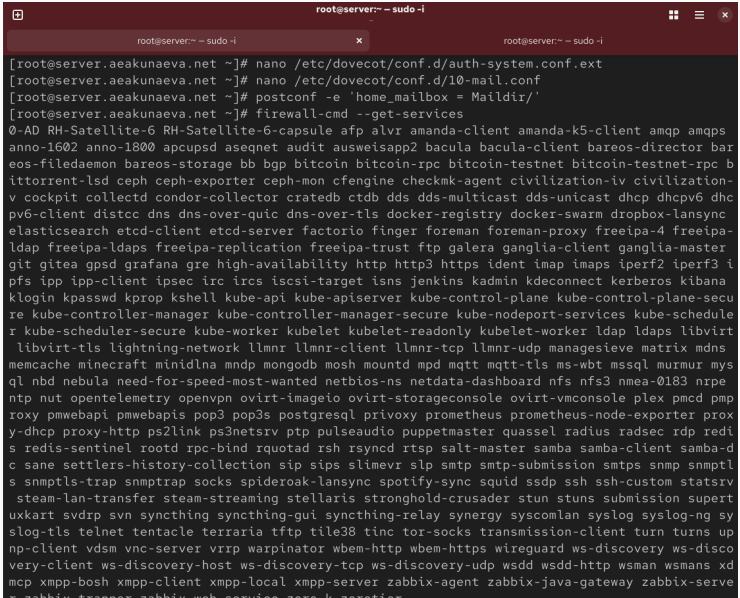


Настройка межсетевого экрана

```
[root@server.aeakunaeva.net ~]# firewall-cmd --get-services
0-AD RH-Satellite-6 RH-Satellite-6-capsule afp alvr amanda-client amanda-k5-client amqp amqps
anno-1602 anno-1800 apcupsd aseqnet audit ausweisapp2 bacula bacula-client bareos-director bar
eos-filedaemon bareos-storage bb bgp bitcoin bitcoin-rpc bitcoin-testnet bitcoin-testnet-rpc b
ittorrent-lsd ceph ceph-exporter ceph-mon cfengine checkmk-agent civilization-iv civilization-
v cockpit collectd condor-collector cratedb ctdb dds dds-multicast dds-unicast dhcp dhcpv6 dhc
pv6-client distcc dns dns-over-quic dns-over-tls docker-registry docker-swarm dropbox-lansync
elasticsearch etcd-client etcd-server factorio finger foreman foreman-proxy freeipa-4 freeipa-
ldap freeipa-ldaps freeipa-replication freeipa-trust ftp galera ganglia-client ganglia-master
git gitea gpsd grafana gre high-availability http http3 https ident imap imaps iperf2 iperf3 i
pfs ipp ipp-client ipsec irc ircs iscsi-target isns jenkins kadmin kdeconnect kerberos kibana
klogin kpasswd kprop kshell kube-api kube-apiserver kube-control-plane kube-control-plane-secu
re kube-controller-manager kube-controller-manager-secure kube-nodeport-services kube-schedule
r kube-scheduler-secure kube-worker kubelet kubelet-readonly kubelet-worker ldap ldaps libvirt
 libvirt-tls lightning-network llmnr llmnr-client llmnr-tcp llmnr-udp managesieve matrix mdns
memcache minecraft minidlna mndp mongodb mosh mountd mpd mqtt mqtt-tls ms-wbt mssql murmur mys
ql nbd nebula need-for-speed-most-wanted netbios-ns netdata-dashboard nfs nfs3 nmea-0183 nrpe
ntp nut opentelemetry openvpn ovirt-imageio ovirt-storageconsole ovirt-vmconsole plex pmcd pmp
roxy pmwebapi pmwebapis pop3 pop3s postgresql privoxy prometheus prometheus-node-exporter prox
y-dhcp proxy-http ps2link ps3netsrv ptp pulseaudio puppetmaster quassel radius radsec rdp redi
s redis-sentinel rootd rpc-bind rquotad rsh rsyncd rtsp salt-master samba samba-client samba-d
c sane settlers-history-collection sip sips slimevr slp smtp smtp-submission smtps snmp snmptl
s snmptls-trap snmptrap socks spideroak-lansync spotify-sync squid ssdp ssh ssh-custom statsrv
 steam-lan-transfer steam-streaming stellaris stronghold-crusader stun stuns submission supert
uxkart svdrp svn syncthing syncthing-gui syncthing-relay synergy syscomlan syslog syslog-ng sy
slog-tls telnet tentacle terraria tftp tile38 tinc tor-socks transmission-client turn turns up
np-client vdsm vnc-server vrrp warpinator wbem-http wbem-https wireguard ws-discovery ws-disco
very-client ws-discovery-host ws-discovery-tcp ws-discovery-udp wsdd wsdd-http wsman wsmans xd
mcp xmpp-bosh xmpp-client xmpp-local xmpp-server zabbix-agent zabbix-java-gateway zabbix-serve
r zabbix-trapper zabbix-web-service zero-k zerotier
```


Запуск и начало работы с Dovecot

```
[root@server.aeakunaeva.net ~]# firewall-cmd --add-service=pop3s --permanent
success
[root@server.aeakunaeva.net ~]# firewall-cmd --add-service=imap --permanent
success
[root@server.aeakunaeva.net ~]# firewall-cmd --add-service=imaps --permanent
success
[root@server.aeakunaeva.net ~]# firewall-cmd --reload
success
[root@server.aeakunaeva.net ~]# firewall-cmd --list-services
cockpit dhcp dhcpv6-client dns http https imap imaps pop3s smtp ssh ssh-custom
[root@server.aeakunaeva.net ~]# restorecon -vR /etc
[root@server.aeakunaeva.net ~]# systemctl restart postfix
[root@server.aeakunaeva.net ~]# systemctl enable dovecot
Created symlink '/etc/systemd/system/multi-user.target.wants/dovecot.service' → '/usr/lib/syst
emd/system/dovecot.service'.
[root@server.aeakunaeva.net ~]# systemctl start dovecot
[root@server.aeakunaeva.net ~]# MAIL=~/Maildir mail
s-nail: No mail for root at /root/Maildir
s-nail: /root/Maildir: No such entry, file or directory
[root@server.aeakunaeva.net ~]# doveadm mailbox list -u user
doveadm(user): Error: User doesn't exist
[root@server.aeakunaeva.net ~]# doveadm mailbox list -u aeakunaeva
INBOX
```


Мониторинг работы почтовой службы

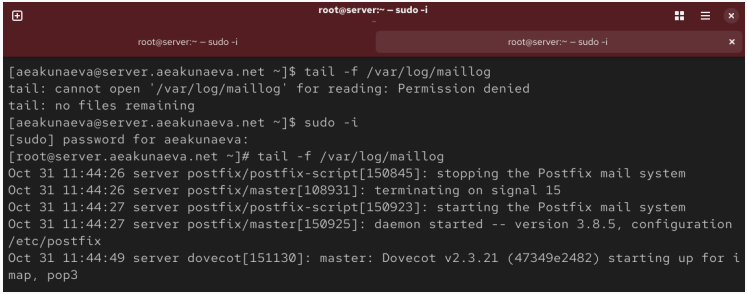


Установка почтового клиента evolution на client

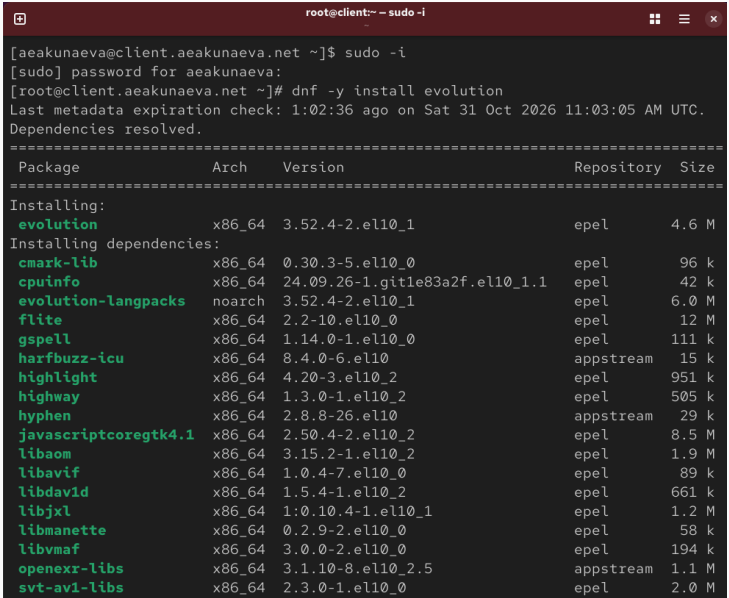


Настройка учётной записи Evolution

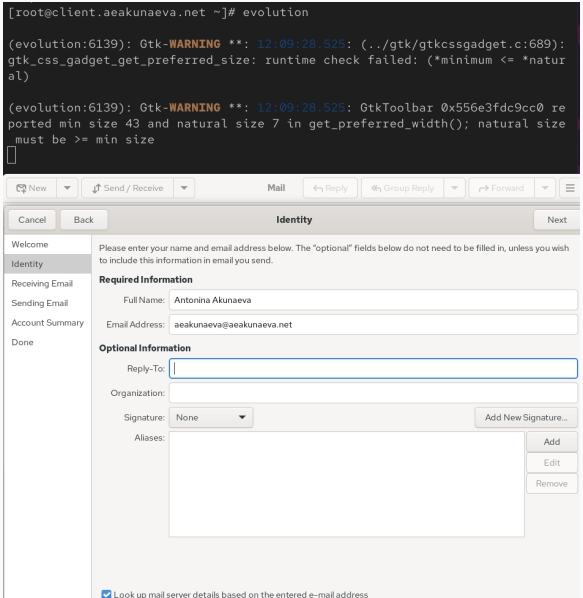


Настройка учётной записи Evolution

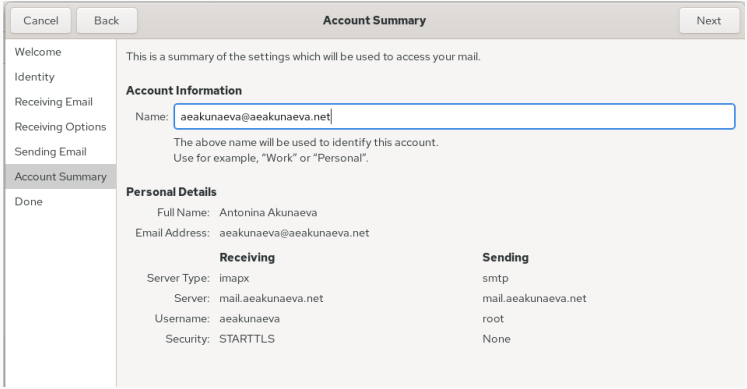


Настройка учётной записи Evolution

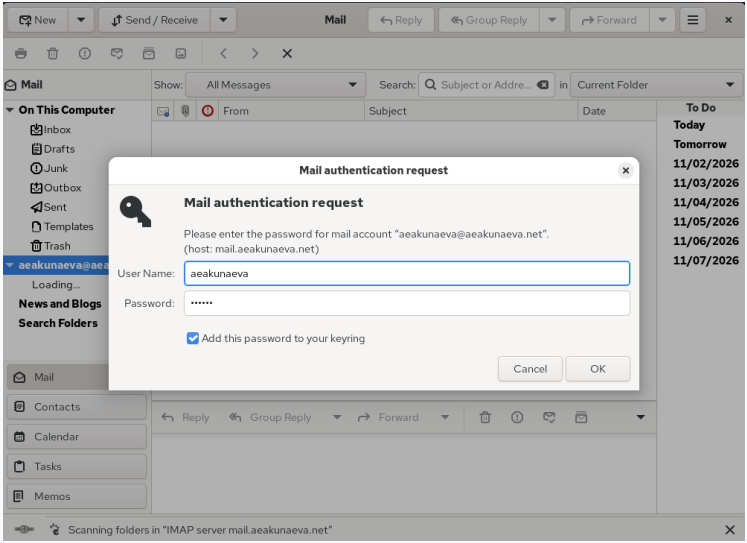

Отправление текстовых писем в Evolution

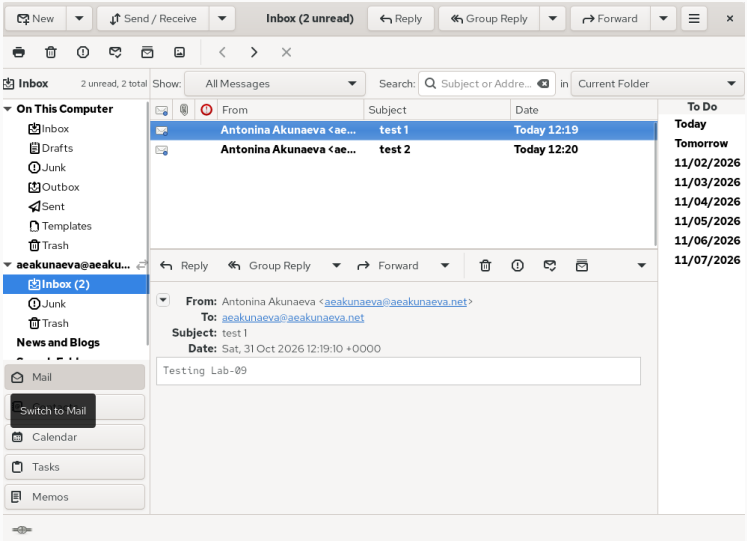

Мониторинг работы почтовой службы

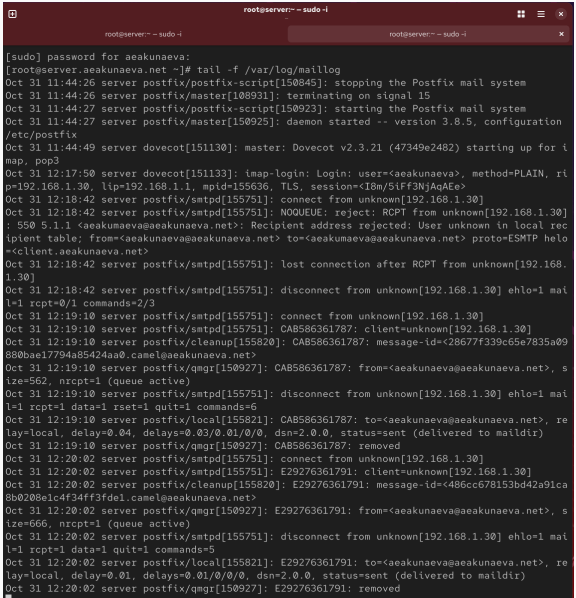

Проверка работы почтовой службы через Telnet


```
[root@server.aeakunaeva.net ~]# telnet mail.aeakunaeva.net 110
Trying 192.168.1.1...
Connected to mail.aeakunaeva.net.
Escape character is '^]'.
+OK Dovecot ready.
user aeakunaeva
+OK
pass 123456
+OK Logged in.
list
+OK 2 messages:
1 687
2 791
.
retr 1
+OK 687 octets
Return-Path: <aeakunaeva@aeakunaeva.net>
X-Original-To: aeakunaeva@aeakunaeva.net
Delivered-To: aeakunaeva@aeakunaeva.net
Received: from client.aeakunaeva.net (unknown [192.168.1.30])
        by server.aeakunaeva.net (Postfix) with ESMTP id CAB586361787
        for <aeakunaeva@aeakunaeva.net>; Sat, 31 Oct 2026 12:19:10 +0000 (UTC)
Message-ID: <28677f339c65e7835a09880bae17794a85424aa0.camel@aeakunaeva.net>
Subject: test 1
From: Antonina Akunaeva <aeakunaeva@aeakunaeva.net>
To: aeakunaeva@aeakunaeva.net
Date: Sat, 31 Oct 2026 12:19:10 +0000
Content-Type: text/plain
Content-Transfer-Encoding: 7bit
User-Agent: Evolution 3.52.4 (3.52.4-2.el10_1)
MIME-Version: 1.0

Testing Lab-09
.
dele 2
+OK Marked to be deleted.
quit
+OK Logging out, messages deleted.
Connection closed by foreign host.
```


Изменение внутреннего окружения Vagrant

```
[root@server.aeakunaeva.net ~]# cd /vagrant/provision/server
[root@server.aeakunaeva.net server]# cd /vagrant/provision/server
[root@server.aeakunaeva.net server]# mkdir -p /vagrant/provision/server/mail/etc/doveco
t/conf.d
[root@server.aeakunaeva.net server]# cp -R /etc/dovecot/dovecot.conf /vagrant/provision
/server/mail/etc/dovecot/
[root@server.aeakunaeva.net server]# cp -R /etc/dovecot/conf.d/10-auth.conf cp -R /etc/
dovecot/conf.d/10-auth.conf
cp: target '/etc/dovecot/conf.d/10-auth.conf': Not a directory
[root@server.aeakunaeva.net server]# cp -R /etc/dovecot/conf.d/10-auth.conf /vagrant/pr
ovision/server/mail/etc/dovecot/conf.d/
[root@server.aeakunaeva.net server]# cp -R /etc/dovecot/conf.d/auth-system.conf.ext /va
grant/provision/server/mail/etc/dovecot/conf.d/
[root@server.aeakunaeva.net server]# cp -R /etc/dovecot/conf.d/10-mail.conf
cp: missing destination file operand after '/etc/dovecot/conf.d/10-mail.conf'
Try 'cp --help' for more information.
[root@server.aeakunaeva.net server]# cp -R /etc/dovecot/conf.d/10-mail.conf /vagrant/pr
ovision/server/mail/etc/dovecot/conf.d/
[root@server.aeakunaeva.net server]# nano /vagrant/provision/server/mail.sh
[root@server.aeakunaeva.net server]#
```

Изменение конфигурационного файла /vagrant/provision/server/mail.sh

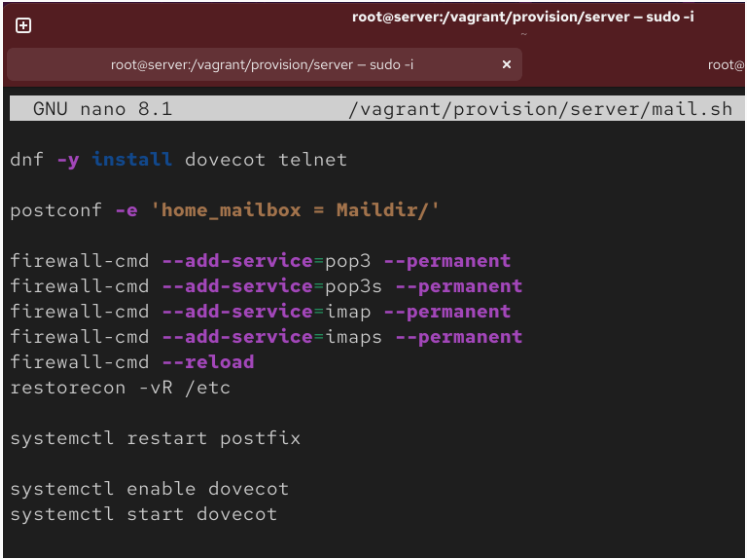

Изменение конфигурационного файла /vagrant/provision/client/mail.sh

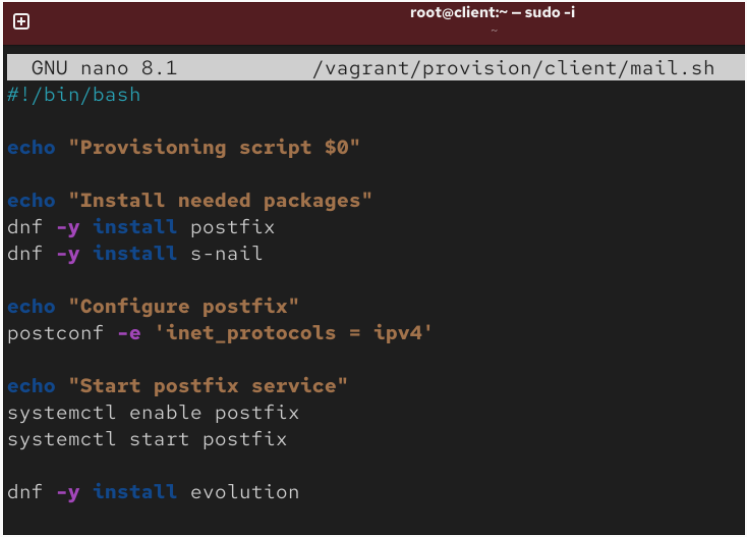

Выводы

Выводы

Я приобрела практическик навыки по установке и простейшему конфигурированию POP3/IMAP-сервера.