

# Efficient Algorithms for Geometric Partial Matching

Pankaj K. Agarwal   Hsien-Chih Chang   Allen Xiao


Department of Computer Science, Duke University

June 2019

# Geometric (bipartite) matching




$A, B$

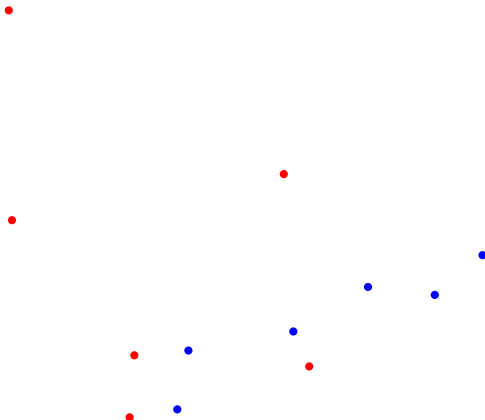

# Geometric (bipartite) matching




$A, B$

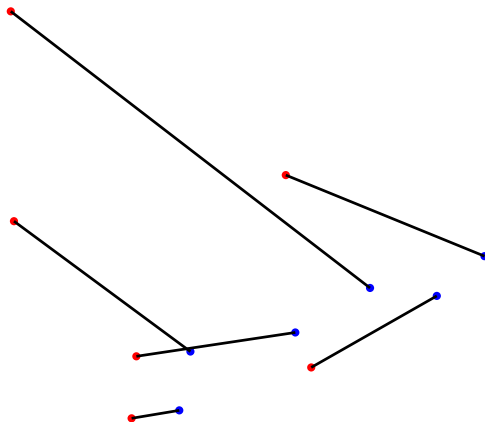

# Geometric (bipartite) matching




$A, B$

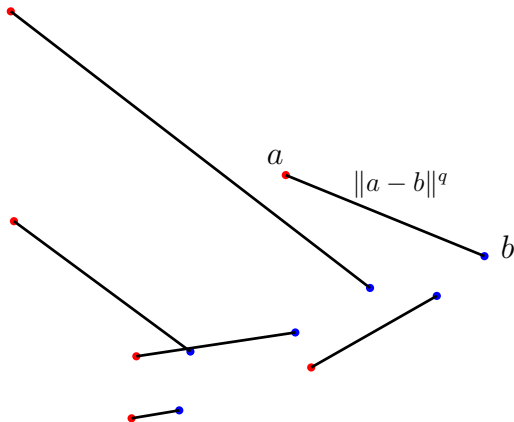

# Geometric (bipartite) partial matching



$A, B$

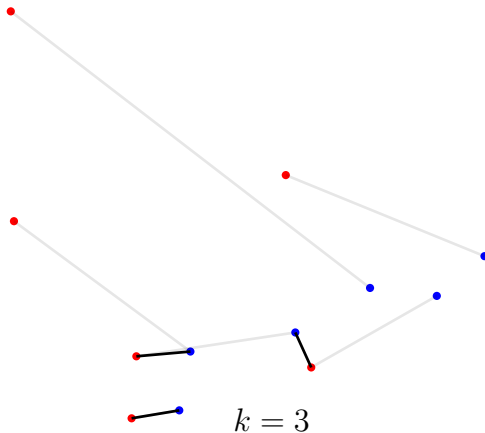





	<b>approx.</b>	<b>time</b>	<b>valid <math>q</math></b>
Hungarian algorithm (Kuhn)	exact	$O(km + k^2 \log n)$	$q \geq 1$
		$O(kn \text{ polylog } n)$	
Ramshaw, Tarjan 2012	exact <sup>1</sup>	$O(m\sqrt{k} \log(kC))$	$q \geq 1$
	$(1 + \varepsilon)$	$O(n\sqrt{k} \text{ polylog } n \log(1/\varepsilon))$	
Sharathkumar, Agarwal 2012	$(1 + \varepsilon)$	$O(n \text{ poly}(\log n, 1/\varepsilon))$	$q = 1$
new (Hungarian)	1	$O((n + k^2) \text{ polylog } n)$	$q \geq 1$
new (cost-scaling)	$(1 + \varepsilon)$	$O((n + k\sqrt{k}) \text{ polylog } n \log(1/\varepsilon))$	$q \geq 1$

<sup>1</sup>Assuming integer costs  $\leq C$ .

# Unit-capacity min-cost flow formulation

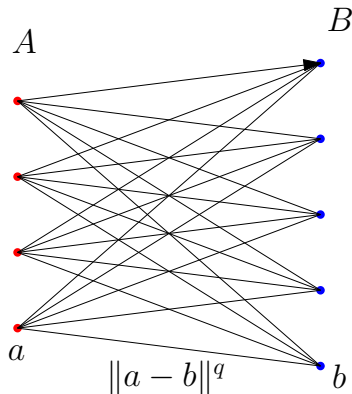


# Unit-capacity min-cost flow formulation

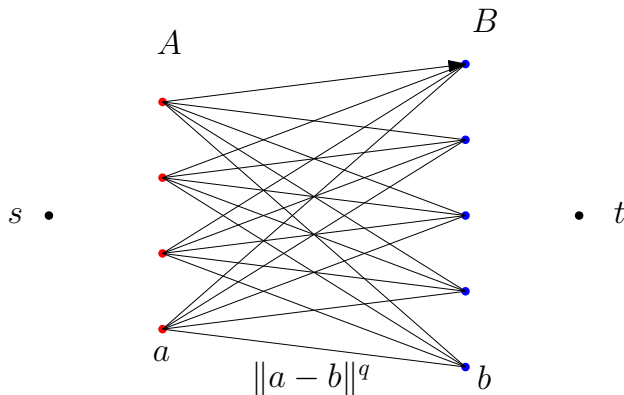





# Unit-capacity min-cost flow formulation

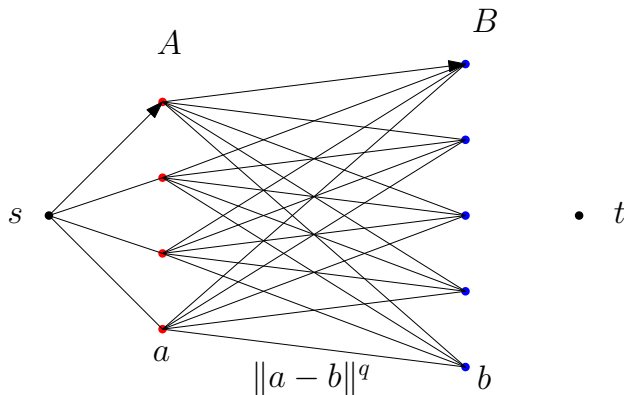


# Unit-capacity min-cost flow formulation

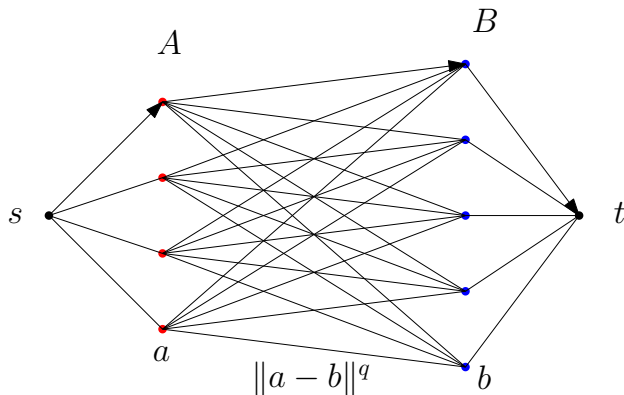


# Unit-capacity min-cost flow formulation

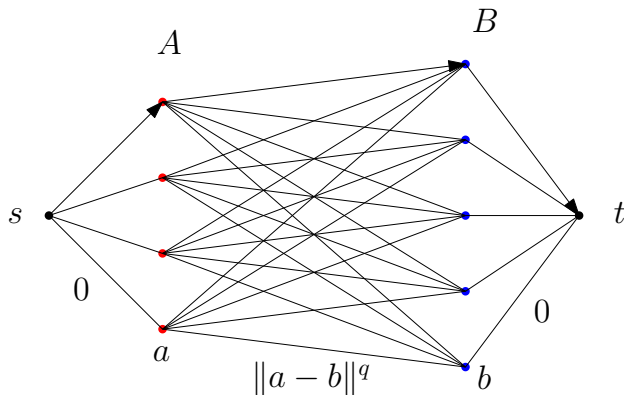


# Unit-capacity min-cost flow formulation

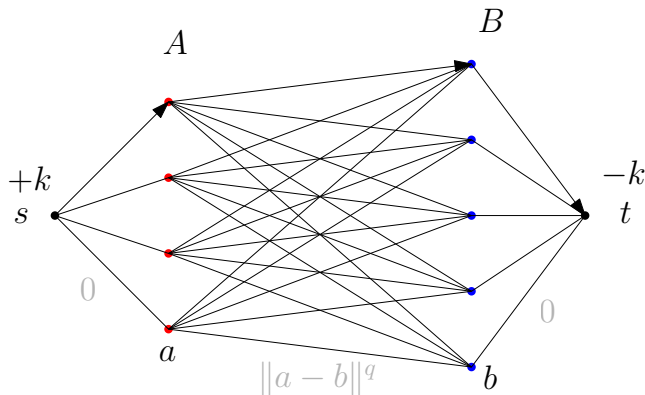

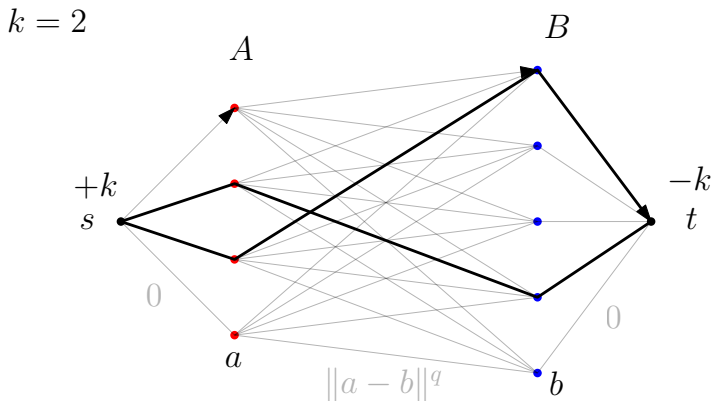





- ▶  $c_{\pi}(v \rightarrow w) := c(v \rightarrow w) - \pi(v) + \pi(w)$
- ▶  **$\theta$ -optimality**:  $c_{\pi}(v \rightarrow w) \geq -\theta$  on all residual arcs
- ▶ **admissible** residual arcs:  $c_{\pi}(v \rightarrow w) \leq 0$



- ▶  **$\theta$ -optimality**:  $c_\pi(v \rightarrow w) \geq -\theta$  on all residual arcs
- ▶ **admissible** residual arcs:  $c_\pi(v \rightarrow w) \leq 0$
- ▶  $\theta$ -optimal circulation is  $+n\theta$  approx.
- ▶ Find  $\theta$ -optimal circulations for geometrically decreasing values of  $\theta$ :
  1. Reduce  $\theta \leftarrow \theta/2$ , while creating  $O(k)$  excess.
  2. **Refine** this pseudoflow into a circulation, while preserving  $\theta$ -optimality






- ▶  $(1 + \varepsilon)$ -approx. geometric partial matching reduces into executing  $O(\log(n^q/\varepsilon))$  cost scales.



► Inside Refine:

1. Hungarian search: raise potentials until an excess-deficit admissible path exists.
2. Augment by an admissible **blocking flow**.

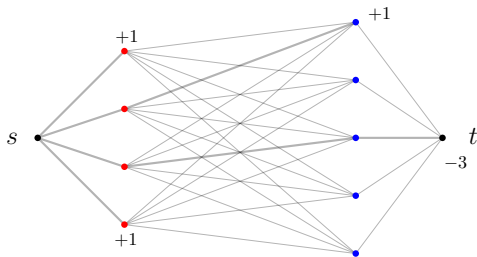


►  $O(\sqrt{k})$  blocking flows before  $f$  becomes a circulation.



## ► Inside Refine:

1. Hungarian search: raise potentials until an excess-deficit admissible path exists.
2. Augment by an admissible **blocking flow**.

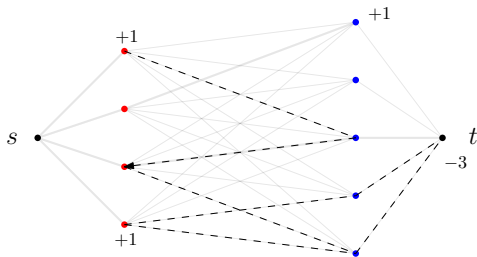


►  $O(\sqrt{k})$  blocking flows before  $f$  becomes a circulation.



## ► Inside Refine:

1. Hungarian search: raise potentials until an excess-deficit admissible path exists.
2. Augment by an admissible **blocking flow**.

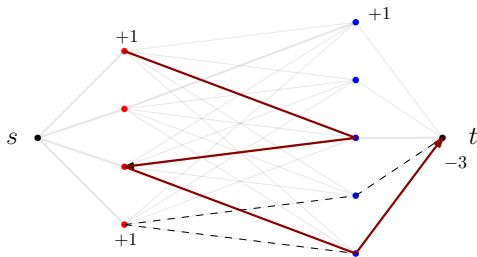


►  $O(\sqrt{k})$  blocking flows before  $f$  becomes a circulation.



► Inside Refine:

1. Hungarian search: raise potentials until an excess-deficit admissible path exists.
2. Augment by an admissible **blocking flow**.

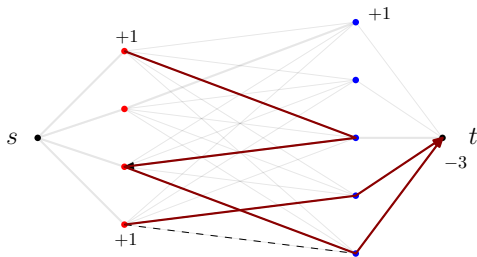


►  $O(\sqrt{k})$  blocking flows before  $f$  becomes a circulation.



► Inside Refine:

1. Hungarian search: raise potentials until an excess-deficit admissible path exists.
2. Augment by an admissible **blocking flow**.

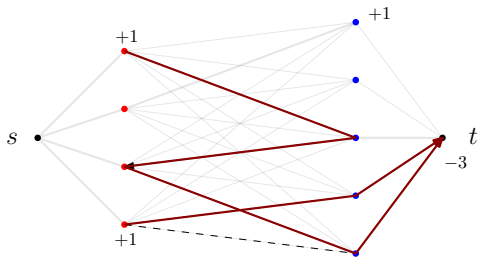

►  $O(\sqrt{k})$  blocking flows before  $f$  becomes a circulation.



- ▶ Inside Refine:
  1. Hungarian search: raise potentials until an excess-deficit admissible path exists.
  2. Augment by an admissible **blocking flow**.
  
- ▶ After  $O(n \text{ polylog } n)$ -time preprocessing, perform Hungarian search and find each blocking flow in  $O(k \text{ polylog } n)$  time.


- ◀ ◻ ▶ ◀ ◻ ▶ ◀ ≡ ▶ ◀ ≡ ▶ ≡



# Hungarian search with BCP (Agarwal-Efrat-Sharir)



$X$ : admissible reachable from an excess node

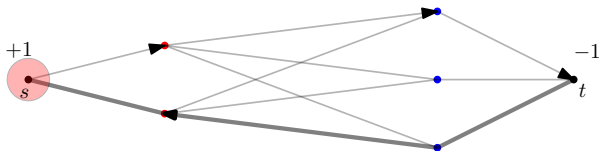


- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)

# Hungarian search with BCP (Agarwal-Efrat-Sharir)




$X$ : admissible reachable from an excess node

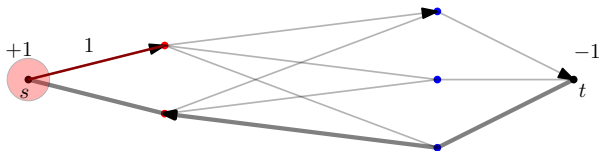

- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




$X$ : admissible reachable from an excess node

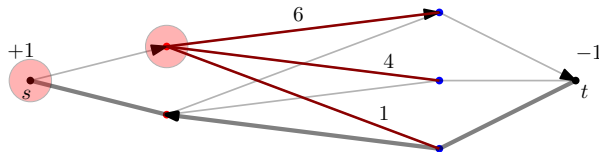

- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




$X$ : admissible reachable from an excess node

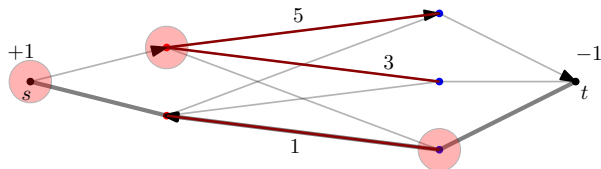

- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




$X$ : admissible reachable from an excess node

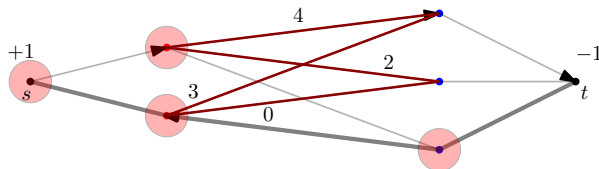

- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




$X$ : admissible reachable from an excess node

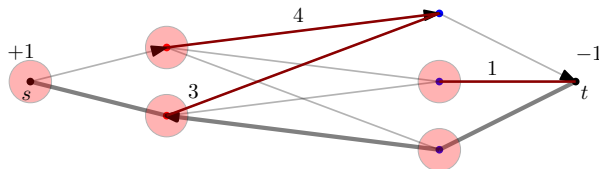

- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




$X$ : admissible reachable from an excess node

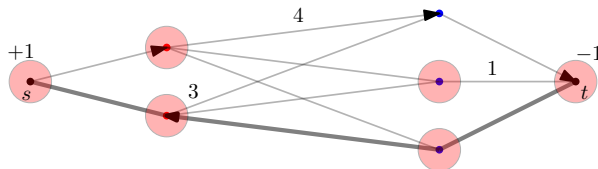

- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




$X$ : admissible reachable from an excess node

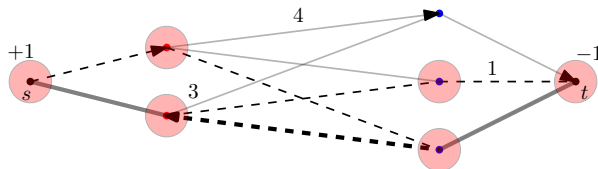


- Dynamic 2D BCP with  $O(\text{polylog } n)$  update time,  $O(\log^2 n)$  query time (Kaplan *et al.* SODA'17)




# Problem: Hungarian search looks at too many nodes

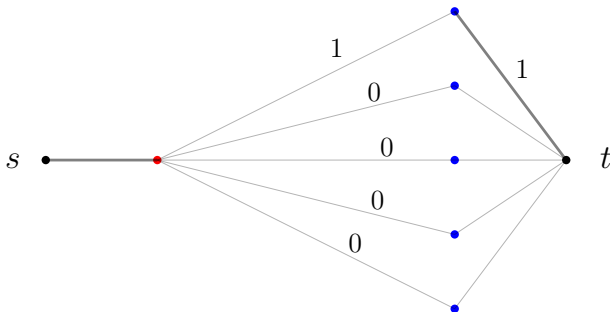


# Problem: Hungarian search looks at too many nodes

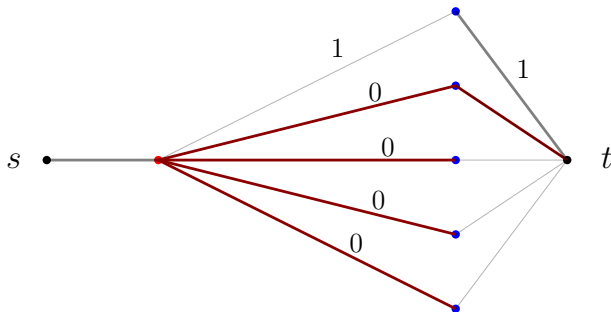

# Problem: Hungarian search looks at too many nodes

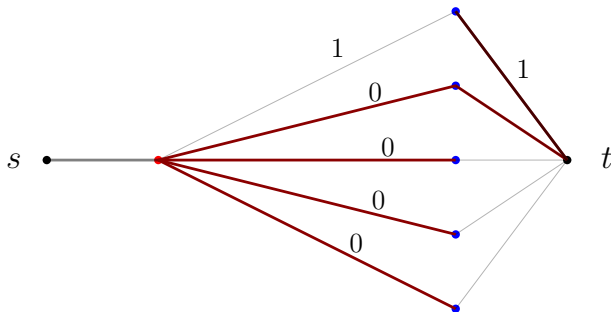


# Problem: Hungarian search looks at too many nodes

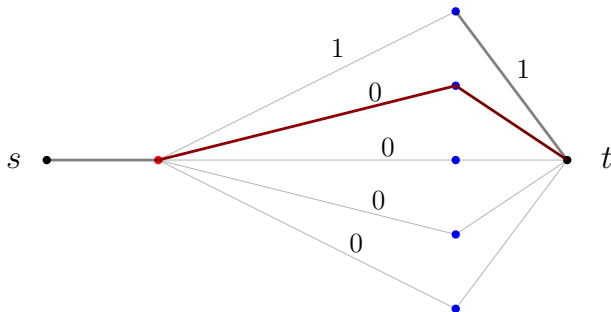




- ▶ **Alive nodes**: nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes**: ones which aren't alive.

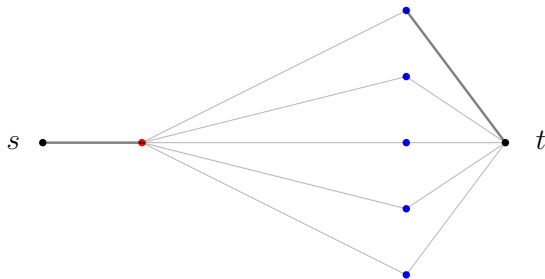

- ▶ **Alive path**: residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.




- ▶ **Alive nodes**: nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes**: ones which aren't alive.

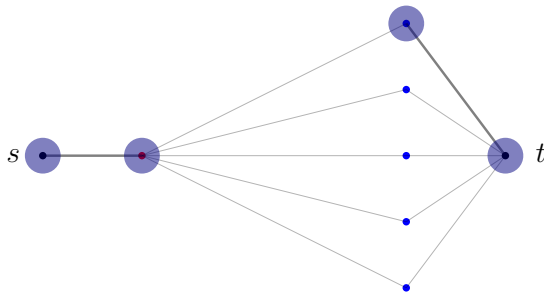

- ▶ **Alive path**: residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.




- ▶ **Alive nodes:** nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes:** ones which aren't alive.

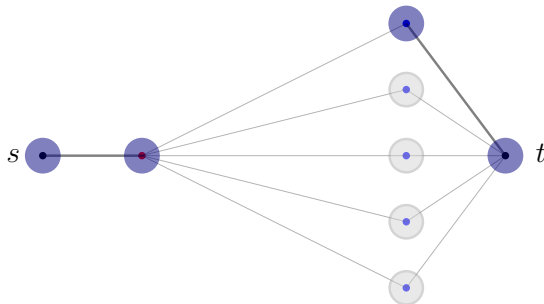

- ▶ **Alive path:** residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.



- ▶ **Alive nodes:** nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes:** ones which aren't alive.

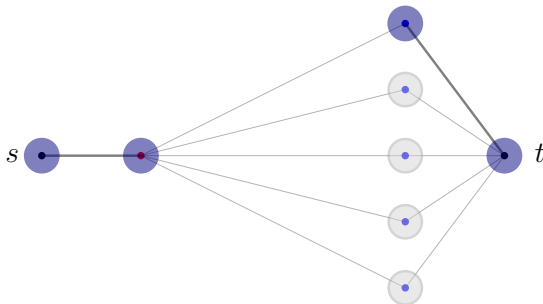


- ▶ **Alive path:** residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.






- ▶ **Alive nodes:** nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes:** ones which aren't alive.

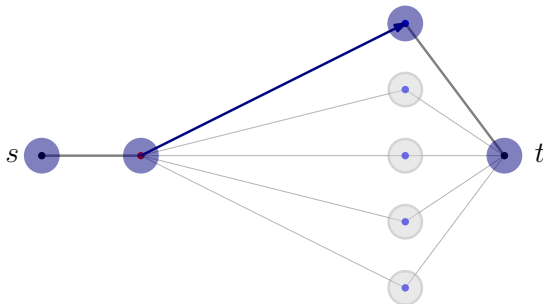

- ▶ **Alive path:** residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.




- ▶ **Alive nodes:** nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes:** ones which aren't alive.

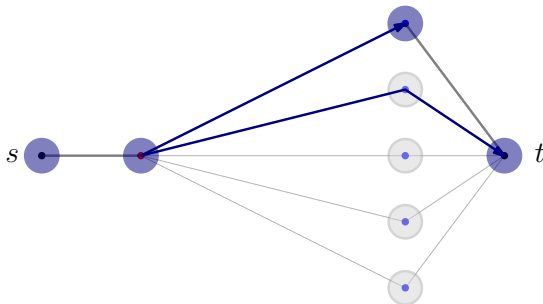

- ▶ **Alive path:** residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.




- ▶ **Alive nodes:** nonzero excess/deficit, or adjoining flow support arcs.
- ▶ **Dead nodes:** ones which aren't alive.

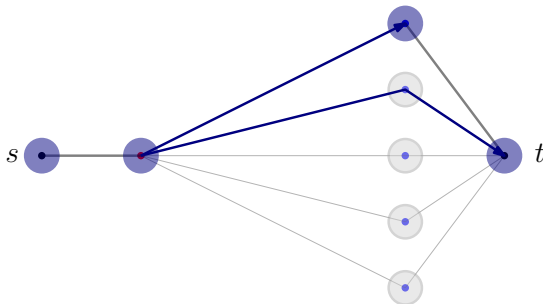

- ▶ **Alive path:** residual path between two alive nodes with no other alive nodes in between.
- ▶ Don't need to track potential of dead nodes.




- ▶ Alive paths have length 1, 2, or 3.

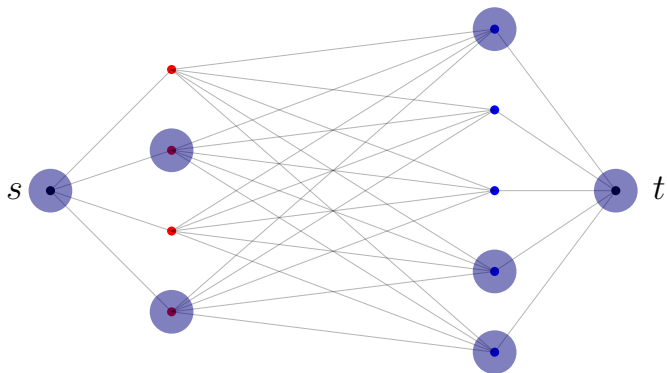

- ▶ Telescoping:  $c_{\pi}(s \rightarrow a \rightarrow b) = c(a \rightarrow b) - \pi(s) + \pi(b)$
- ▶ Can still use BCP.




- ▶ Alive paths have length 1, 2, or 3.

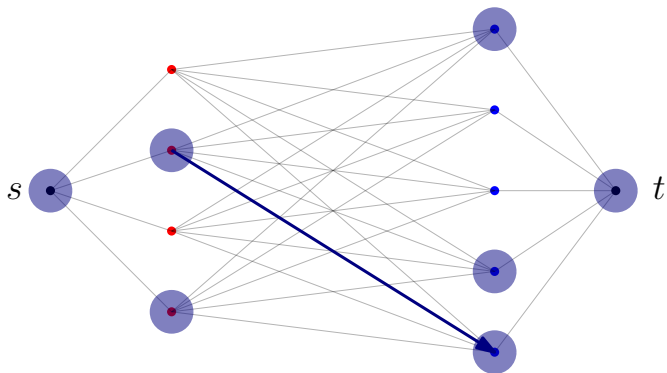

- ▶ Telescoping:  $c_{\pi}(s \rightarrow a \rightarrow b) = c(a \rightarrow b) - \pi(s) + \pi(b)$
- ▶ Can still use BCP.


- ▶ Alive paths have length 1, 2, or 3.

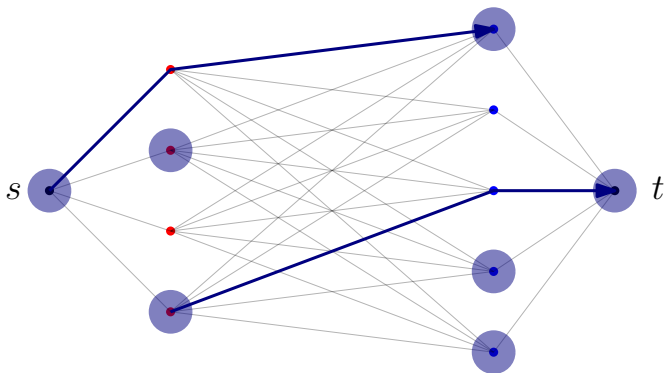

- ▶ Telescoping:  $c_{\pi}(s \rightarrow a \rightarrow b) = c(a \rightarrow b) - \pi(s) + \pi(b)$
- ▶ Can still use BCP.




- ▶ Alive paths have length 1, 2, or 3.

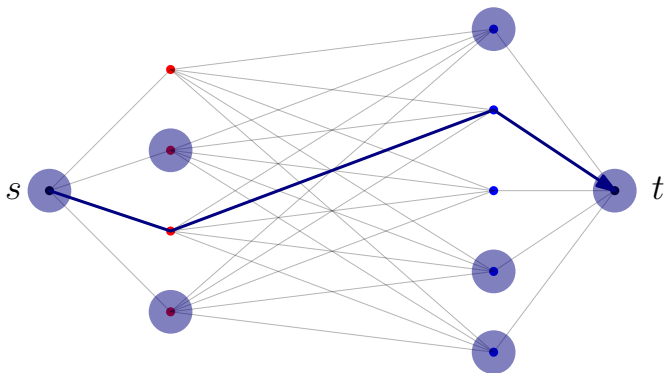

- ▶ Telescoping:  $c_{\pi}(s \rightarrow a \rightarrow b) = c(a \rightarrow b) - \pi(s) + \pi(b)$
- ▶ Can still use BCP.



- ▶ Alive paths have length 1, 2, or 3.

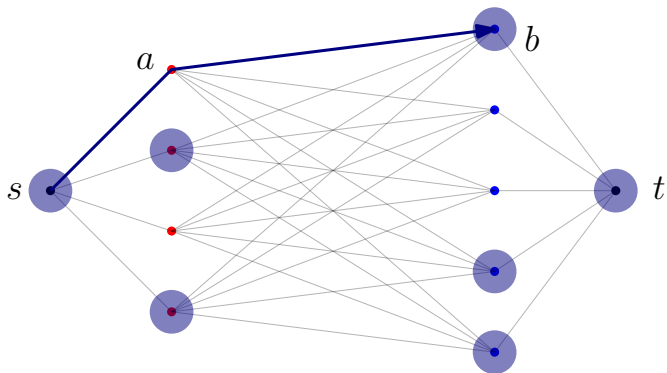


- ▶ Telescoping:  $c_{\pi}(s \rightarrow a \rightarrow b) = c(a \rightarrow b) - \pi(s) + \pi(b)$

- ▶ Can still use BCP.





- ▶ Alive paths have length 1, 2, or 3.

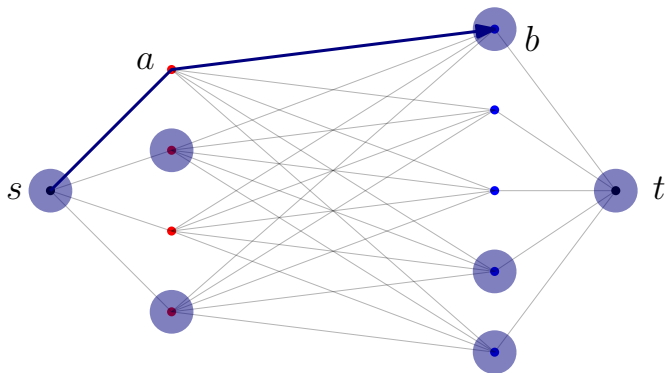

- ▶ Telescoping:  $c_{\pi}(s \rightarrow a \rightarrow b) = c(a \rightarrow b) - \pi(s) + \pi(b)$
- ▶ Can still use BCP.

# Problem: BCP initialization





- ▶  $X_t$  and  $X_{t+1}$  differ by the newly-matched  $A$  points.
- ▶ Persistence?



Thank you.