


fd's \swarrow `< cowrie.c cat | grep include | wc -l > num_lines`
 let \swarrow 30 = open cowrie.c
 31 = open num_lines

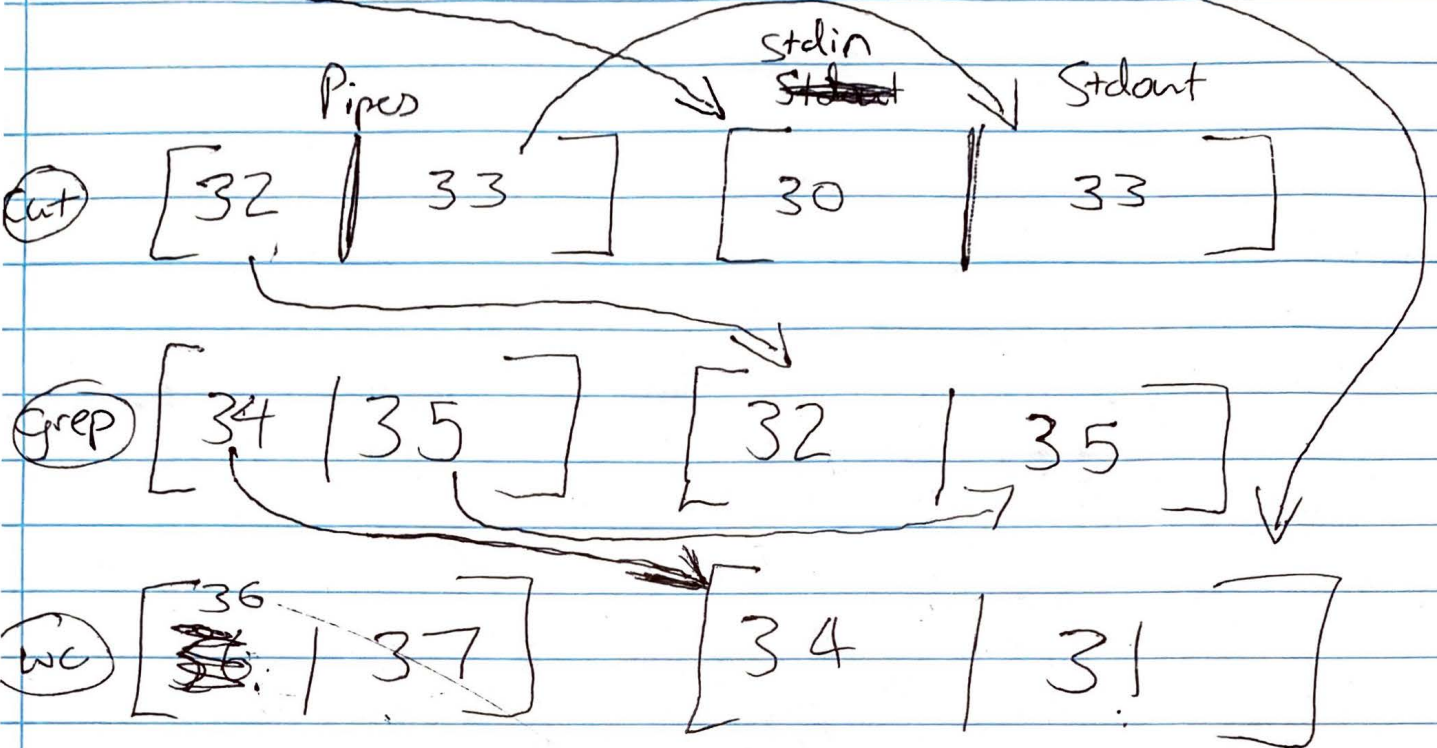

Remember to ~~add~~ `close` after each dup2 and to close the output pipe (`lowlevel close()`) once you spawn.

~~stdin~~

or out

IF no in file then no need to dup2 those ~~fd's~~ fd's