

AXONA

Architecture

David A. Smith
Axona.net

An Axona Architecture Note v0.6.2 2026-05-30

A protocol is the contract between layers that don't trust each other.

What I cannot create, I do not understand.

RICHARD FEYNMAN · 1988

I The Stack

AXONA SHIPS AS THREE REPOSITORIES that compose into one running system. Each layer has a single responsibility,¹ a single canonical version identifier (`KERNEL_VERSION`), and a contract surface narrow enough to fit on a postcard.

@axona/protocol (kernel). The pure-JS library. Owns the DHT routing, the pub/sub overlay, the cryptography, and the transport contracts. No browser DOM, no Node-specific I/O, no network code outside abstract transport classes. Runs identically in browsers, in Node, in dht-sim’s simulated network.

axona-peer (browser application). The reference end-user app. Provides identity persistence, region selection, WebRTC mesh formation, a chat-style UI for pub/sub. Imports the kernel as a vendored copy under `vendor/axona-protocol/` so the version that ran when the page was built is the version that runs in the browser.

axona-bridge (deployed server). The signaling + introducer service at `bridge.axona.net`. Runs an embedded `AxonaPeer` of its own (so it’s a full DHT participant, not just a relay), gates connecting peers behind a version handshake, relays WebRTC signaling between browsers, and forwards Axona wire frames addressed to its own embedded peer.

The three components carry their own semver tracks because each ships to a different audience: kernel changes need API-level discipline; peer changes are user-visible UI; bridge changes are operational deploys. But they all share the same kernel version, visible at runtime through `/healthz` (bridge), the `welcome` frame (any peer connecting), and the version row in the peer UI.

II Identity and Addressing

EVERY AXONA PARTICIPANT has a 264-bit identifier. The top 8 bits are a Google S2 cell prefix² computed from the peer’s latitude and longitude; the bottom 256 bits are the SHA-256 of the peer’s Ed25519 public key. A peer in London has an ID starting with `0x44`; a peer

¹ The pattern is intentional. A peer’s business logic should never need to know the wire format; a bridge should never need to know what topic a subscriber cares about; the kernel should never need to know which application is using it. Every interface in this document is a place where one layer was given the right to be wrong about the layer below.

A fourth component, `dht-sim`, runs the kernel against a simulated network for protocol research and regression benchmarks. It’s not part of the production stack but shares the same `@axona/protocol` library; every change that ships to production also has to pass the simulator’s 25,000-node battery.

² S2 projects the sphere onto the six faces of a cube and partitions each face along a Hilbert curve. We bin to level 3 (8×8 per face, 384 cells globally), then truncate to 8 bits — equivalent to taking the top 8 bits of Google’s 64-bit level-3 cell ID. Result: 192 valid cells, with byte values 192–255 reserved for future system use. The cube projection keeps cell areas within $\sim 1.4\times$ of each other globally — no polar shrinkage — and any standard S2 library can recompute our prefixes by truncation.

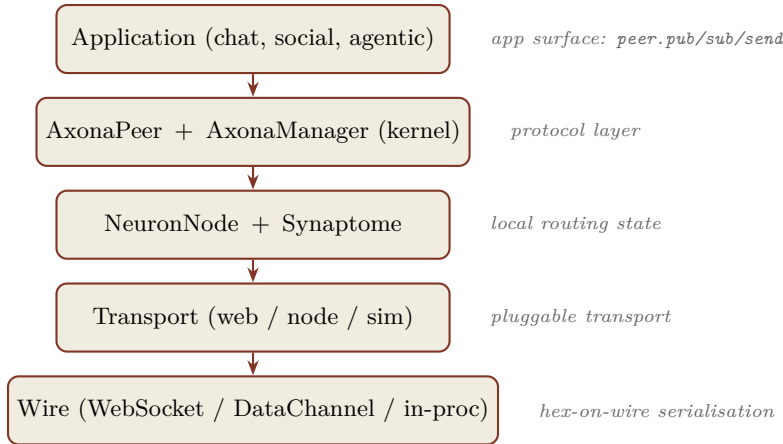


Figure 1: *

Five layers in one peer. Every arrow is a contract; every contract has a smoke-test suite.

in Virginia starts with 0x89. Two peers in the same region share a leading byte; two random peers share only the bits their keys happen to share.

The address space is treated as `BigInt` in every line of running code. The wire format is 66-character lowercase hex — the **ONLY** representation that ever appears in JSON. The conversion happens at exactly two places: when the transport serialises an outgoing frame, and when the dispatcher parses an incoming one.³

Topic identifiers share the address space. A topic is named by the application (a string like `us-east/hello-world`) and optionally anchored at a publisher: `topicId = sha256(publisher || topic-name)`. When the publisher is null the topic is global (top byte 00); when it's a regional synthetic publisher (top byte = S2 cell, bottom bits zero), the topic inherits the region. That's what makes regional pub/sub route naturally: peers in the same region are XOR-closest to topics anchored at that region.

The Activation Potential (AP) routing formula, the K-closest selector, and the synaptome's stratum buckets all operate on this one space. There is no separate "topic ID space" or "peer ID space"; they share addresses because they share routing.

³ This rule didn't exist in versions 1.0 through 1.4. The kernel mixed hex strings and `BigInts` in different layers and the boundaries weren't enforced; `pub/sub` silently failed because `transport.notify(bigint)` returned without sending against a hex-keyed `Map`. v1.5.0 made `BigInt`-internal canonical; `_normPeerId` helpers and `typeof v === 'bigint'` defensive branches are gone.

III The Kernel: *@axona/protocol*

THE KERNEL IS THE PROTOCOL. Everything else is its clients. The directory structure mirrors the contract surface:

`src/contracts/`. Abstract base classes: `Transport`, `DHT`, `DHTNode`, `BootstrapService`, `PersistenceAdapter`. These are the seams

where alternate implementations plug in. A custom transport (libp2p, QUIC, embedded) extends `Transport`; a database-backed persistence (IndexedDB, SQLite) extends `PersistenceAdapter`.

src/dht/. The active routing layer: `NeuronNode`, `Synapse`, `AxonaPeer`, `AxonaDomain`, `Subscription`. This is where the Axona routing logic lives, and where the developer-facing API surface (`peer.pub`, `peer.sub`, `peer.lookup`) is declared.

src/pubsub/. The pub/sub overlay: `AxonaManager`, `post.js` (topic ID derivation), `envelope.js` (signed publish envelopes), `ed25519.js` (Ed25519 binding for `crypto.subtle`). `AxonaManager` owns the K-closest tree, the replay caches, the dedup LRU, the metrics counters.

src/transport/. Concrete transports: `transport/web/` (browser: BridgeTransport over WebSocket + WebRTCTransport over DataChannels), `transport/node/` (server-side WebSocket), `transport/sim/` (in-process simulation for dht-sim and tests). All implement the abstract `Transport` contract identically.

src/utils/. Pure helpers: `hexid.js` (BigInt $\leftrightarrow$ hex conversions, XOR distance, leading-zero count), `s2.js` (S2 cell computation), JSON codec (`transport/wire.js`).

src/identity/. Ed25519 keypair derivation + persistence envelope. The single entry point `deriveIdentity` takes a `{lat, lng}` or full options object and returns `{id, pubkey, pubkeyHex, privateKey, region, ...}`.

The whole kernel has zero runtime dependencies beyond the host JavaScript environment (browser or Node 20+). No bundler, no transpilation, no build step. The same source files run in the browser via ES modules, in Node via direct `import`, and in the simulator via the in-process transport.

IV The Local Node

EACH PEER’S VIEW OF THE NETWORK lives in two data structures on the `NeuronNode`: the *synaptome* (its outgoing connections) and the *incoming synapse index* (peers known to point at it). Both are keyed by 264-bit `BigInt` `nodeId`.

A `Synapse` is a routing edge — it carries a peer ID, a measured latency, a learned weight, a stratum (the XOR-distance bucket), an inertia lock, and provenance (was this synapse added via handshake, hop-cache, triadic introduction, or sponsor bootstrap?). The synaptome is

unbounded by design; the routing layer evicts synapses through the *Structural Survival Rule*, which guarantees navigability even under aggressive weight decay.

Routing decisions don't pick the XOR-closest synapse blindly. Each candidate is scored by Activation Potential:

$$AP_c = \frac{\Delta \text{Distance}_c}{L_c} \times (1 + w \cdot W_c)$$

The first factor is progress velocity — how much XOR distance the hop closes per millisecond of measured latency. The second is a mild boost for synapses that have historically led to fast lookups. Weight only accrues on at-or-below-average-latency paths, so a high- W synapse genuinely represents a fast route, not just a frequently-used one. Two random hops with similar latency tie; the one that's served us well before wins the tiebreak.

V The Protocol Layer

AXONAPEER IS THE ACTIVE OBJECT that turns a **NeuronNode** into a network participant. It owns:

- The handler installation. On `peer.start()` it registers the Axona routing handlers (`lookup_step`, `lookahead_probe`, `find_closest_set`, `route_msg`, `local_probe`, `triadic_introduce`, `hop_cache`, `lateral_spread`, `reinforce`) on the transport.
- The auto-admission loop. It asks `transport.boundPeers()` for currently-bound nodeIds and seeds them into the synaptome; it subscribes to `transport.onPeerBound` for future admissions.
- The pub/sub surface. `peer.pub`, `peer.sub`, `peer.pull`, `peer.metrics`: the developer-facing API. Each delegates to the **AxonaManager** after deriving the topic ID and (for `pub`) building a signed envelope.
- The direct-message surface. `peer.send`, `peer.notify`, `peer.onMessage`: per-peer request/response and fire-and-forget, outside the pub/sub overlay. For protocols that aren't topic-shaped.
- The lookup primitive. `peer.lookup(targetKey)` runs an iterative K-closest walk and returns `{found, path, hops, peerId, latency}`. This is what **AxonaManager** uses internally on every `pub/sub` to find the topic's axons.

AxonaManager is a separate object owned by the peer. Its job is the pub/sub overlay: when a subscriber sends `pubsub:subscribe-k` to the K-closest axons for a topic, the receiving **AxonaManager** stores the subscriber in its `role.children` for that topic. When a publisher fans

The rule, in one sentence: a synapse may only be pruned if at least one other synapse with the same stratum exists. The effect: every populated stratum keeps at least one live route, so the address space stays globally navigable even after heavy decay.

The **AxonaPeer** surface is described in detail in the companion document *AxonaPeer Overview* (v0.4.0). This section is the architectural placement; the field-by-field description lives there.

`pubsub:publish-k` to its own K -closest, each receiving `AxonaManager` iterates its `role.children` and forwards `pubsub:deliver` to each subscriber. The publisher’s signed envelope flows through unchanged; per-hop dedup prevents the fan-out tree from delivering duplicates.

The K -closest replication is what makes the system tolerant. A publisher sends to *five* root axons in parallel; a subscriber subscribes at *five* root axons in parallel. As long as one axon in each set overlaps, delivery succeeds. With $K = 5$ and synaptomes that converge under the bridge’s peer-list dissemination, overlap is typically 4 or 5 of 5 — so a publish that loses two axons to transient WebRTC failures still delivers cleanly.

VI The Transport Layer

TRANSPORT IS WHERE ADDRESSES MEET SOCKETS. The kernel’s `Transport` contract is a small surface: `start`, `stop`, `send` (request/response), `notify` (fire-and-forget), `isConnected`, `bindPeer`, `boundPeers`, `onPeerBound`, `onRequest`, `onNotification`, `onPeerDied`. Every concrete transport implements this surface and the upper layers don’t care which one is wired in.

Three concrete implementations ship:

transport/web/. The browser stack. A `CompositeTransport` fans out to two sub-transports based on which one owns each `nodeId`: a `BridgeTransport` that carries Axona wire frames over the same `WebSocket` the bridge uses for signaling, and a `WebRTCTransport` over a `MeshManager` that owns the data-channel pool. The factory `webTransport({bridgeUrl, identity})` composes the two, drives the bridge’s version gate, runs the hello/hello-ack admission, threads TURN credentials from the welcome frame into the mesh’s ICE config, and resolves once everything is up.

As of kernel v2.1 the factory also owns the *connection lifecycle*, so applications no longer hand-roll it: a 1 Hz ping/pong heartbeat with stale detection, auto-reconnect with exponential back-off on an unexpected socket close (re-running the version gate and hello/hello-ack on each re-open), and a small observability surface — a `bridgeState` machine (`connecting` → `open` → `stale` → `disconnected`, plus `upgrade-required` on a 4426 close), the captured `welcome` (`bridgeInfo`), and the live ping RTT (`bridgeRtt`). A 4426 version-gate rejection suppresses reconnect; `reconnectNow()` forces an immediate re-attempt (used on tab-resume and network-online).

The WebRTC mesh under `webTransport` self-heals on the same

Before v2.1 the factory connected once and stayed dead if the socket dropped; each browser app re-implemented reconnect, ping/pong, and welcome parsing itself. Folding that into the factory is what let `axona-peer` delete its ~850-line `AxonaNode/BrowserEngine` wrapper and build directly on `webTransport` + `AxonaPeer`, the same two-object pattern the demo uses.

principle. **MeshManager** runs a 1 Hz ping/pong on every data channel and (kernel v2.1.1) evicts a peer the moment its channel goes dead: no pong for the heartbeat-timeout window, or a few consecutive throwing `send()`s — the signature of a channel a browser keeps reporting `open` after a laptop sleep, where the socket is gone but `readyState` lies. Eviction fires `onPeerLost` → `onPeerDied`, so the protocol layer drops the synapse and routes around the dead peer while the bridge’s next peer-list rebuilds a fresh channel. This is the Transport contract’s heartbeat-timeout obligation, and it means recovery from a connection freeze needs *zero* application code. An application *may* add an accelerator: on a resume event (`visibilitychange`, `online`, `bfcache` `pageshow`) call `transport.mesh.reset()` + `reconnectNow()` to clear stale peers at once rather than waiting out the per-peer timeouts — both the demo and the axona.net peer do this. A macOS screensaver notably fires none of those resume events (the tab never goes hidden), which is why the transport-level eviction is the load-bearing mechanism and the app-level reset is only a speed-up.

transport/node/. A Node-side WebSocket transport. Used by the bridge’s embedded peer to talk to connected browsers without simulating WebRTC — the bridge *is* the signaling server, so it doesn’t need WebRTC to reach any browser; the WebSocket is direct.

transport/sim/. The simulator transport. Used by dht-sim’s **TransportAxonaEngine** and by the kernel’s smoke tests. Identical Transport contract, but messages are scheduled in the event loop with simulated latency derived from a real internet topology dataset.

The wire format is JSON, with a single quirk: `BigInt` is serialised as `"<digits>n"` (decimal digits with an `n` suffix) and revived back to `BigInt` on decode. `NodeId` fields are always hex strings on the wire — they never appear as bigint-suffixed literals because the kernel converts them at frame construction.

The same kernel test suite runs against all three transports. Cross-transport bugs — which is to say, the kind of bug where a fix lands in one transport’s call path but not the others — can’t ship.

VII The Bridge

THE BRIDGE IS AN INTRODUCER, not a server. Its job is to let browsers find each other; once they’ve found each other, WebRTC data channels carry every byte of application traffic peer-to-peer. The bridge stays in the picture only for two reasons: (1) it’s the rendezvous for the version handshake before peers can talk at all; (2) it’s a guaranteed-reachable mesh peer, which makes it a useful K-closest

axon in small networks where two browsers might otherwise fail to find common axons.

The bridge handles three kinds of frames over the WebSocket:

Signaling. `welcome`, `peer-list`, `peer-joined`, `peer-left`, `signal`, `ping/pong`. Routes WebRTC SDP offers/answers and ICE candidates between browsers, broadcasts join/leave events, supplies short-lived TURN credentials in the welcome frame.

Version handshake. `client-hello/` `server-hello`. Enforces a minimum peer version. Rejects sub-minimum peers with WebSocket close code 4426 and a human-readable reason; the peer’s UI shows a “please reload” banner.

Axona wire. `{type: 'axona', payload: ...}` frames carrying `req/res/ntf` messages between any connected browser and the bridge’s embedded peer. These are the same frames any two browsers exchange over WebRTC — the bridge embeds a full `AxonaPeer` of its own (`BridgeAxonaNode`) and participates in routing just like any other node, which is why it can be in K-closest sets and why it can hold subscriber children for pub/sub topics.

The bridge’s embedded peer has a fixed identity (`cf3138...` in production, anchored at London). Its `health` surface exposes the kernel version it’s running and the synaptome it has built up, available at `/healthz` JSON. Operators check that endpoint to confirm a deploy.

VIII The Wire Protocol

EVERY FRAME ON THE WIRE is JSON. Every `nodeId` or `topic ID` field is a 66-character lowercase hex string. There’s no binary framing, no protobuf, no length-prefixed records — the discipline of having one wire format that any of the three transports can carry is worth the few percent of size you give up.

Three kinds of message-typed envelopes flow over the wire:

Request (*k*: `'req'`). A correlated request expecting a response.

Carries an integer `id` for correlation, a `type` string naming the handler (`lookup_step`, `route_msg`, `find_closest_set`, ...), and an opaque `body`.

Response (*k*: `'res'`). The reply to a `req`. Echoes the `id` and adds an `ok` boolean and a `body`.

Notification (*k*: `'ntf'`). Fire-and-forget. No `id`, no response. Used for `hello/hello-ack` admission, `pubsub:subscribe-k`, `pubsub:publish-k`, `pubsub:deliver`, `triadic_introduce`, `hop_cache`, `lateral_spread`, `reinforce`.

The kernel builds a peer’s `AxonaManager` lazily, on its first `pub/sub`. The bridge never publishes or subscribes — it only relays — so it must build that engine *eagerly* at startup, otherwise the `pubsub:subscribe-k/publish-k` handlers are never installed and every `pub/sub` frame addressed to the bridge is silently dropped. Because the bridge sits in nearly every peer’s K-closest set, that failure mode is a near-invisible delivery hole; the eager build is what keeps it an honest relay axon.

The handler types are versioned implicitly through the kernel — the bridge’s `minPeerVersion` gate excludes peers running an older protocol that wouldn’t understand newer messages. Major protocol changes bump `KERNEL_VERSION`’s minor; minor changes are additive (a peer that doesn’t know a handler type silently drops the message).

A pub/sub message envelope is signed:

```
{
  msgId:      "<sha256 of canonical(envelope) hex>",
  ts:         1716638400000,
  topic:      "us-east/hello-world",
  message:    "<application payload>",
  signerPubkey: "<Ed25519 pubkey hex>",
  signature:  "ed25519:<128 hex chars>"
}
```

Receivers verify the signature against the signer’s pubkey using `crypto.subtle.verify`; the kernel surfaces verification result on the delivered envelope so applications can decide whether to trust unsigned or unverifiable publishes.

IX Routing

AXONA’S ROUTING IS LEARNING-ADAPTIVE. It replaces Kademlia’s k -bucket array with a dynamic synaptome that adjusts edge weights based on observed latency. The basic shape — iterative lookup, $\log_2(N)$ hop count — is unchanged from Kademlia; what changes is which peer you ask at each hop.

The five wire operations that drive Axona routing are:

lookup_step (*req*). “Here’s a target. What’s your best next hop?”

The receiver evaluates AP across its synaptome’s progress candidates, returns the winning synapse + its own routing state.

lookahead_probe (*req*). “If I forward to you for target T , who would you forward to?” A one-deep peek that lets the caller compare expected hop costs across candidates before committing.

find_closest_set (*req*). “Give me your K peers closest to this target.” The K -closest harvester used by AxonaManager’s pub/sub axon discovery.

route_msg (*req*). Generic routed-message forwarder. Used by AxonaManager for `__tunneled_direct__` delivery when the target isn’t directly bound.

reinforce (*ntf*). “This lookup succeeded; bump the weight on the synapse I used.” Fire-and-forget LTP signal back along the path. Only flows when the lookup hit at-or-below average latency for the path’s region.

Two structural-plasticity messages let the network rewire itself without explicit instruction: `triadic_introduce` (“introduce me to your friend at *X*”) and `hop_cache` (“I’ve forwarded to *X* several times; install a direct synapse to *X*”). Both are fire-and-forget notifications that obey the synaptome’s admission rule (`_addByVitality`).

X Pub/Sub: K-Closest

THE PUB/SUB OVERLAY IS ITS OWN STRUCTURE. It sits on top of Axona routing but doesn’t reuse the synaptome for state — each peer maintains a separate set of *axon roles*, one per topic it’s chosen as an axon for. A role holds a topic ID, a set of children (subscribers), a replay cache, and a *K*-replicated peer set (the other root axons for the same topic).

Subscriber-side flow:

1. Compute `topicId = sha256(publisher || topic-name)`.
2. Find the *K* peers closest to `topicId` in the local synaptome. (No network walk — the local reachable peer set is what matters; remote-walk *K*-closest returns ghost IDs that route fan-out into dead ends.)
3. Send `pubsub:subscribe-k` to each, carrying the subscriber’s `nodeId` and an optional `lastSeenTs` for replay.
4. Each receiver runs `_addOrRecruitChild`, stores the subscriber under `role.children`, and optionally serves a `pubsub:replay-batch` of cached messages newer than `lastSeenTs`.

Publisher-side flow:

1. Compute the same `topicId`.
2. Build a signed envelope.
3. Find the same *K* peers closest to `topicId` locally.
4. Send `pubsub:publish-k` to each.
5. Each receiver runs `_onPublishDirect`: dedup against `_seenPublishes`, add to replay cache, fan `pubsub:deliver` to every child in `role.children`.
6. Each child receives `pubsub:deliver`, dedups, fires the local `_deliveryCallback` which routes to the application’s subscription handler.

The performance claim of Axona over Kademlia is roughly 40% fewer wall-clock milliseconds per lookup at 25,000 nodes, mostly from latency-weighted hop selection. The figure is documented in the companion paper *Axona: A Learning-Adaptive DHT*.

When a publisher's K-closest peers also happen to be in the subscribers' K-closest sets, the tree converges and delivery is single-hop from publisher to axon to subscriber. When they don't, the system relies on the redundancy: a missing axon's subtree is covered by the four other axons. The Activation Potential weighting makes high-quality axons dominate the K-closest set over time.

Per-hop `_alreadySeenPublish` dedup is keyed on `publishId` (a string like `nodeId:counter`), separate from the content-hash `msgId` the application sees. Multiple arrivals of the same `publishId` at one peer collapse to a single `_deliveryCallback` firing.

K-CLOSEST IS COMPUTED AGAINST THE LOCAL SYNAPTOME, so in a browser mesh that fills in gradually the answer is a moving target: a peer that subscribed while it only knew the bridge picked a narrow axon set, and a publisher that joined later computes a wider one — they can fail to overlap, and the publish misses that subscriber. The result is cached per topic under an epoch counter to avoid recomputing on every `pub/sub`; the fix is to *invalidate* that cache as the mesh changes. `AxonaPeer` bumps the epoch on every `onPeerBound`, and `AxonaManager.refreshTick` (a 10s timer the application arms after subscribing) flushes it and re-issues every live subscription against the now-converged set. So a subscription anchored early re-anchors as the mesh widens, rather than staying pinned to a stale, narrow axon set.

XI The Application API

EVERY AXONA APPLICATION TALKS TO THE PROTOCOL THROUGH ONE IMPORT. The barrel export at `@axona/protocol` is the entire contract surface — a small set of factory functions, one peer class, and a handful of helpers. This section is the field-by-field reference.

Identity

`deriveIdentity({ lat, lng })` *generate a fresh peer identity*

lat number. Latitude in decimal degrees.

lng number. Longitude in decimal degrees.

Returns a Promise resolving to `{ id, pubkey, pubkeyHex, privkey, privateKey, region }`. `id` is the 66-char hex `nodeId` (8-bit S2 prefix from `(lat,lng) + 256-bit SHA-256` of the public key). `privateKey` is the in-memory `CryptoKey` ready for signing; `privkey` is the base64-encoded export for persistence. The whole envelope is what `AxonaPeer` expects as `identity`.

`dumpIdentity(identity)` *serialize for storage*

Returns a Promise resolving to a plain JSON object you can write to disk or IndexedDB. The reciprocal `loadIdentity(envelope)` reconstructs the `CryptoKey`-bearing form on the next launch.

Transports

`webTransport({ ... })` *browser transport: WebSocket to the bridge + WebRTC mesh*

bridgeUrl string. e.g. `wss://bridge.axona.net`.

identity identity envelope from `deriveIdentity`.

log (*optional, default* `() => {}`) function (`event`, `data`) that receives transport-internal diagnostic events.

WebSocketImpl (*optional*) constructor for the `WebSocket` class. Defaults to `globalThis.WebSocket`.

autoHandshake (*optional, default* `true`) when `true`, `transport.start()` drives the full bridge admission sequence end-to-end — the `WebSocket` version gate, the application-level `hello/hello-ack` exchange, and binding the bridge as a peer. Set to `false` only if you're driving the handshake yourself.

peerVersion (*optional, default* `KERNEL_VERSION`) semver string sent in `client-hello`.

handshakeTimeoutMs (*optional, default* `15000`) how long to wait for the bridge's `hello` before rejecting the *first* `start()`.

reconnect (*optional, default* `true`) auto-reconnect with exponential backoff on an unexpected socket close (bounds tunable via `reconnectInitialMs` / `reconnectMaxMs`). A 4426 version-gate rejection is the one close that does *not* reconnect.

Returns a `CompositeTransport`. After `await transport.start(identity.id)` the bridge is reachable as a peer (`transport.bridgeNodeId`) and the WebRTC mesh is ready to accept channels. Beyond the `Transport` contract the returned object carries the connection-observability surface the factory now owns:

onBridgeState(cb) subscribe to state transitions `connecting | open | stale | disconnected | upgrade-required`; `bridgeState` is the current value, `upgradeReason` the 4426 detail.

onWelcome(cb) the bridge's `welcome` (`{connId, version, kernelVersion, turn}`), also cached on `bridgeInfo` and replayed to late subscribers.

bridgeRtt / *bridgeRttAvg* last and windowed ping→pong round-trip in ms.

onPingTraffic(cb) per-frame (nodeId, 'sent'|'recv') pulses for live link indicators.

reconnectNow() force an immediate reconnect with the backoff reset (tab-resume / network-online).

nodeTransport.server({ ... }) *server-side WebSocket transport (Node 20+)*

nodeTransport.client({ ... }) *Node WebSocket client*

Used by axona-bridge's embedded peer and by Node applications.

Same Transport contract as the browser transport; no WebRTC.

simTransport({ network, identity }) *in-process simulation transport*

network SimNetwork shared across peers.

identity identity envelope.

For tests and dht-sim. Messages are scheduled in the event loop with synthetic latency from a real internet topology dataset.

AxonaPeer

new AxonaPeer({ ... }) *the per-node DHT instance*

node NeuronNode instance for this peer (carries id, lat, lng, the synaptome).

domain AxonaDomain the peer joins. Construct one per network with *new AxonaDomain({ k: 20 })*, where *k* (default 20) is the *K*-replication factor.

transport the transport instance from *webTransport*, *nodeTransport*, or *simTransport*.

identity (optional) identity envelope. Required for signed publishes (the default). Apps that only call *peer.pub(t, m, { sign: false })* can omit it.

axonaManager (optional) explicit *AxonaManager*. When omitted, one is built automatically on *peer.start()*.

persist (optional) *PersistenceAdapter* for synaptome / subscription / replay-cache checkpoints. Default: no persistence.

Lifecycle

`await peer.start()` *wire handlers, install delivery hook*

`await peer.stop()` *detach handlers and event listeners*

`await peer.join(sponsor?)` *production bootstrap path*

sponsor (optional) 66-char hex node ID. If given, opens a transport channel to that peer and seeds the synaptome from it. If omitted, returns immediately — the peer is “joined” but isolated; inbound connections from other peers populate the synaptome.

`await peer.leave(opts?)` *leave the network gracefully*

opts.drain (default `true`) wait for in-flight publishes to settle.

opts.notify (default `true`) send a `peer-leaving` notification to every peer in the synaptome.

opts.timeoutMs (default 5000) maximum drain window in ms.

Pub / Sub

`await peer.pub(topic, message, opts?)` *publish to a topic*

topic string. Application-level topic name (any non-empty string).

message JSON-serializable payload.

opts.sign (default `true`) sign the envelope with the identity’s Ed25519 key.

opts.publisher (default: *this peer’s nodeId*) controls where the topic is anchored in the DHT. `undefined` means this peer publishes its own topic; `null` means the public well-known mode (`topicId=SHA256(topic)`, anyone can publish); a 66-char hex string lets a peer relay under that publisher’s anchor (rare).

Returns a Promise resolving to the `msgId` — the 64-char hex content hash of the envelope. Throws `PublishError` on invalid inputs or signing failure.

`await peer.sub(topic, handler, opts?)` *subscribe to a topic*

topic string.

handler function (envelope) => void invoked for each delivery.

The envelope is { `msgId`, `ts`, `topic`, `message`, `publisher`, `signerPubkey` }.

opts.publisher (default: *this peer’s nodeId*) same semantics as `pub` — must match the publisher’s `publisher` value for the subscription to land at the right topic ID.

opts.since (default: *live tail*) replay control. Pass 'latest' for the most-recent cached message plus future deliveries, 'all' for the full replay cache plus future, or a Unix-ms **number** for everything newer than that timestamp.

Returns a Promise resolving to a **Subscription** handle. Call **sub.unsubscribe()** to stop receiving.

await peer.pull(msgId, opts) *fetch a single message by ID from the relay's replay cache*

msgId 64-char hex content hash.

opts.topic string. The topic name (required, used to locate the relay).

opts.publisher 66-char hex publisher ID, or null for public topics.

opts.timeoutMs (default 1000).

Returns the envelope or null if not found.

await peer.metrics(topic, opts) *aggregate counters across the relay tree*

topic string.

opts.publisher 66-char hex publisher ID, or null.

opts.timeoutMs (default 500).

Returns { publishes, subscribers, deliveries, pulls, reshares, relayCount }.

Direct messaging

await peer.send(targetId, message) *RPC-style; awaits the remote handler's return value*

peer.notify(targetId, message) *fire-and-forget*

peer.onMessage(handler) *register a handler for incoming direct messages*

targetId 66-char hex node ID. The peer must already be in the synaptome.

message JSON-serializable payload.

handler function (fromId, message) => result. The return value is sent back to the caller on **send**; ignored on **notify**. Async handlers are awaited.

Mesh introspection

`peer.peers()` returns an array of 66-char hex node IDs currently in the synaptome.
`peer.onPeerJoin(handler)` registers (`nodeId`) => void for new arrivals.
`peer.onPeerLeave(handler)` registers (`nodeId`) => void for departures.
`peer.health()` returns { `started`, `transportConnected`, `synapseCount`, `subscriptionCount`, `kernelVersion` }.
`peer.onLog(level, handler)` level is 'info', 'warn', or 'error'.
`peer.onError(handler)` registers (`err`) => void for unhandled errors.

Lookup

`await peer.lookup(targetKey)` *iterative K-closest walk*

targetKey 66-char hex 264-bit key. Usually a topic ID or a node ID.

Returns { `found`, `path`, `hops`, `peerId`, `latency` }. `found` is the closest reachable peer; `path` is the list of nodes traversed; `hops` is the count; `latency` is wall-clock ms.

Snapshots

`await peer.snapshot()` returns a JSON object capturing identity, synaptome, axon roles, subscriptions, replay caches. Symmetric with `AxonaPeer.fromSnapshot(snap, deps)`, which reconstructs a peer from one of these dumps without touching the network.

Helpers

`await deriveTopicId(publisher, topic)` returns the 66-char hex topic ID. `publisher` may be null (public mode) or a 66-char hex node ID. Useful for displaying the publish location in a UI.

`geoCellId(lat, lng, bits)` returns the integer S2 cell at the given precision. `bits = 8` matches the top 8 bits of every Axona `nodeId`.

XII Identity and Security

IDENTITY IS AN ED25519 KEYPAIR. The kernel uses `crypto.subtle.generateKey` to produce a curve-Ed25519 pair; the public key is hashed with SHA-256 to produce the bottom 256 bits of the `nodeId`; the top 8 bits are the S2 cell of the user's (`lat`, `lng`). The private key never leaves the host environment, but the public key is broadcast on every connection (in `hello/hello-ack`) so peers can verify each other.

Every signed publish carries the publisher's public key (`signerPubkey`) inline. The kernel verifies the `ed25519:<hex>` signature against `signerPubkey` using `crypto.subtle.verify`. Verification is per-envelope, not per-peer — a peer that's untrusted can still relay signed publishes from a trusted publisher unchanged, and any receiver along the way can verify the chain of custody.

Persistence is opt-in. The kernel's `PersistenceAdapter` contract exposes `write(namespace, value)` and `read(namespace)`; concrete adapters target IndexedDB (browser) and the filesystem (Node). When wired, AxonaPeer checkpoints identity, synaptome seeds, and pending subscriptions on a 5-second debounce. On restart, the identity envelope is reloaded and validated (the stored `nodeId` must match the freshly-derived one); subscriptions are reinstalled as soon as the mesh has stabilised.

The `crypto.subtle` dependency is a hard requirement: the demo and the peer fail to boot in insecure contexts (HTTP pages outside localhost) because the Web Crypto API simply isn't available. The bridge serves over HTTPS; the peer's GitHub Pages deployment enforces HTTPS at the Pages level; the demo at `demo.axona.net` required Let's Encrypt cert provisioning before identity derivation would run at all.

Because identity is bound to a region prefix, moving geographic location changes the `nodeId`. `axona-peer`'s `identity.js` preserves the existing identity across reloads unless the user explicitly re-selects a different region. A roaming user keeps the same DHT identity for the life of the browser profile.

XIII Production Deployment

THE PUBLIC STACK RUNS AT THREE URLS.

bridge.axona.net. The deployed bridge. Runs on a DigitalOcean droplet, started by `systemd`, kept current via `git pull && npm ci --omit=dev && systemctl restart`. Exposes `/healthz` for monitoring. Listens on `wss://` only; HTTP requests are redirected.

axona.net. The reference peer application, served via GitHub Pages from the `axona-peer` repo's main branch. Every push redeploys. The vendored `axona-protocol` kernel ships with the app; the version row in the UI confirms which kernel an open tab is running.

demo.axona.net. The minimal pub/sub demo, served via GitHub

Pages from the `axona-protocol` repo's main branch (where `examples/minimal-pubsub-browser/` lives). Same Pages deployment pattern; HTTPS-enforced because `crypto.subtle` requires a secure context.

A coordinated release works as follows: a fix lands in `axona-protocol`, bumps `KERNEL_VERSION` and the package version, tags the commit. `axona-peer` resyncs its `vendor/axona-protocol/` from the new kernel, bumps `PEER_VERSION`, and pushes (Pages picks up). The bridge updates its `@axona/protocol` dependency in `package.json`, bumps `VERSION` in `server.js`, pushes, and the operator runs the deploy script. Every component ends up reporting the same `kernelVersion` in its visible metadata.

XIV Future Directions

THE ARCHITECTURE IS STABLE. The shape of the layering, the wire format, the BigInt-canonical address discipline, the K-closest pub/sub semantics — these are not expected to change. What's coming sits inside the existing seams:

Federated bridges. Multiple bridges in different geographic regions, gossiping peer-lists so a peer connected to one bridge can be reached from another. Single-bridge today is a deployment simplification, not a protocol constraint.

Bridge directory. A well-known public topic (`deriveTopicId({public: true, seed: "axona.bridge-directory"})`) where every bridge republishes itself once per hour: URL, region, kernel version, advertised TURN credentials, last-seen timestamp.⁴ Peers subscribe at startup and cache the directory; a peer whose primary bridge disappears has a list of alternates to try without out-of-band coordination. To prevent spam and DDoS of the channel, the topic uses an *allowed-signer set*: only Ed25519 keys with a valid attestation chain back to one of the genesis bridge keys (baked into the kernel) can publish. Subscribers verify the chain on every publish and drop unattested envelopes at the AxonaManager layer, before they reach the application. Genesis keys can sign attestations admitting new bridges without a kernel release. This turns “federated bridges” from a deployment story into something clients can actually discover at runtime.

Capability hardening (endo / SES). Adopt the Agoric and MetaMask object-capability stack to harden the host-side surface, in three landings: `@endo/marshal` for envelope payloads (so payloads

Every Axona component is required to surface its `KERNEL_VERSION` at a runtime-inspectable point: the bridge in `/healthz` and the welcome frame, the peer in its UI version row, the demo in its footer. The rule exists because before it did, “which kernel is everyone on?” required SSH-ing into the bridge and grepping `node_modules`.

⁴Subscribers keep the newest entry per `signerPubkey` and prune entries older than 24 hours. Pull from the global S2 cell (top byte `0x00`) so every peer sees the same directory regardless of geography.

can carry BigInt, remotable references, and the slot-and-body wire shape captp expects);⁵ an opt-in `AxonaPeer.create({secure: true})` that calls `lockdown()` to freeze JavaScript primordials before kernel init, defending against prototype pollution and supply-chain mutation; and `@endo/captp` layered over `peer.send/peer.onMessage` to upgrade direct messaging from string-handler RPC to capability-style RPC with promise pipelining and revocable handles. A later phase ships `@endo/import-bundle` for content-addressed, signature-verified code distribution — the substrate for running third-party agents and creator-published filters inside peer compartments with only the authority each receiver chose to grant.

⁵ Marshal output is JSON-shaped with `@qclass` annotations on typed values, so legacy peers see plain objects and capability-aware peers see typed data. Negotiated per-envelope via a `payloadFormat` tag.

Persistent topics. Today’s replay cache survives in-memory only.

A pluggable persistence layer for axon `role.replayCache` (with a TTL) lets late subscribers catch up across bridge restarts.

Topic access control. Public-mode topics (`publisher: null`) let anyone publish. Private topics (`publisher: <fixed-pubkey>`) accept publishes only from that key. A capability layer where subscribers verify per-publish signatures against an allowed-signer set lives at the application layer today; lifting it into the kernel is straightforward.

Cross-tab state sharing. Multiple tabs on the same browser today derive the same identity and form independent peers; a BroadcastChannel-based shared peer would reduce mesh load proportional to tab count.

Native transport. A C-based or Rust-based embedded kernel for IoT-class devices, sharing the wire format with the JS kernel so existing peers can talk to it without adaptation.

Connection-time optimization. The authenticated-identity handshake costs only sub-millisecond crypto (one Ed25519 sign plus one verify per link); the felt cost of a cold start is dominated instead by WebRTC ICE/DTLS bring-up, un-bundled module loading, and the few added round-trips of the mesh handshake — none of which touches steady-state routing or delivery latency. The recovery levers all sit at the client and transport layer, independent of the wire protocol: bundle the kernel modules, render the UI and authenticate in the background, and fold the mesh handshake into the DTLS/SDP setup so the signed hello rides the first data-channel frame.⁶ Not yet mission-critical; deferred until adoption makes first-connect time the binding constraint.

⁶ The last lever pairs naturally with binding the channel-binding value to the DTLS certificate fingerprint: once the CBV derives from the fingerprint already exchanged in the SDP, no nonce round-trip is needed and the handshake adds no extra latency — security and speed land together.

The job of the architecture is to make these additions land cleanly. The job of the existing layers is to keep working while they do.

Companion documents: *NeuronNode Overview (v0.4.0)*, *AxonaPeer Overview (v0.4.0)*, *Axona Explainer (v0.4.25)*, and the source repositories at github.com/axona-net.

A Appendix: The Demo Application

THIS IS THE COMPLETE SOURCE of the minimal-pubsub demo deployed at demo.axona.net. The file lives in the kernel repository under `examples/minimal-pubsub-browser/index.html`. Just over six hundred lines of HTML, CSS, and JavaScript, no build step, no dependencies outside the kernel barrel export. Open it in two tabs; one publishes, the other receives. The structure maps to the API reference in §XI section by section: identity, transport, peer construction, lifecycle, subscribe, publish — and, since kernel v2.1, the connection-state and ping-traffic hooks that drive the dot strip and survive a bridge restart.

```
examples/minimal-pubsub-browser/index.html

<!doctype html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1, viewport-
    fit=cover">
  <meta name="theme-color" content="#2d7373">
  <title>Axona Demo</title>

  <style>
    :root {
      --bg:          #ffffff8;
      --ink:         #1a1a1a;
      --muted:       #6b6b6b;
      --card:        #ffffff;
      --border:      #e2dfd6;
      --accent:      #2d7373;
      --accent-soft: #d4e4e1;
      --dot-bridge:  #2d7373;
      --dot-open:    #22c55e;
      --dot-pending: #f59e0b;
      --dot-dead:    #c9c9c9;
      --tile-bg:     #f4f1e8;
    }
    * { box-sizing: border-box; }
    html, body { margin: 0; padding: 0; background: var(--bg); color: var(--
      ink); }
    body {
      font-family: system-ui, -apple-system, 'Segoe UI', Roboto, sans-serif;
      line-height: 1.5;
      min-height: 100vh;
      padding: env(safe-area-inset-top) env(safe-area-inset-right) env(safe-
        area-inset-bottom) env(safe-area-inset-left);
    }
    .wrap {
      max-width: 880px;
      margin: 0 auto;
      padding: 1.4rem 1.1rem 3rem;
    }

    /* Header */
```

```

header {
  display: flex;
  align-items: baseline;
  justify-content: space-between;
  gap: 1rem;
  margin-bottom: 0.6rem;
}
h1 {
  font-size: 1.5rem;
  font-weight: 600;
  letter-spacing: -0.01em;
  margin: 0;
  color: var(--accent);
}
.status {
  font-size: 0.8rem;
  color: var(--muted);
  font-variant-numeric: tabular-nums;
}

/* Dot strip (mesh) */
.dots {
  display: flex;
  flex-wrap: wrap;
  gap: 4px;
  padding: 0.5rem 0 1rem;
  min-height: 18px;
}
.dot {
  width: 7px;
  height: 7px;
  border-radius: 50%;
  background: var(--dot-dead);
  transition: background 0.15s, transform 0.15s, opacity 0.15s;
  opacity: 0.55; /* resting (no recent traffic) */
}
.dot.bridge { background: var(--dot-bridge); width: 9px; height: 9px; }
.dot.open { background: var(--dot-open); }
.dot.pending { background: var(--dot-pending); }
.dot.dead { background: var(--dot-dead); }

/* v2.0.2: pulse-on-ping. The dot brightens when a ping/pong
   frame crosses its channel. Class added on event, removed
   400 ms later → dot fades back to its resting opacity. Steady
   channels at 1 Hz visibly blink twice/second; stalled channels
   go dim within ~1 s. */
.dot.pulse {
  opacity: 1;
  transform: scale(1.35);
}

/* Topic info row */
.topic-row {
  display: flex;
  flex-wrap: wrap;
  gap: 0.5rem;
  margin-bottom: 1.2rem;
}
.tile {
  background: var(--tile-bg);
  border: 1px solid var(--border);
  border-radius: 6px;
  padding: 0.4rem 0.7rem;
  font-size: 0.82rem;
  color: var(--ink);
  display: flex;
  flex-direction: column;
  gap: 1px;
}

```

```

}
.tile .k { color: var(--muted); font-size: 0.7rem; letter-spacing: 0.04em;
  text-transform: uppercase; }
.tile .v {
  font-family: ui-monospace, 'SF Mono', Menlo, monospace;
  font-size: 0.86rem;
}
.tile.topic .v { color: var(--accent); font-weight: 600; }
.tile.prefix .v { color: var(--accent); font-weight: 600; }
.tile.topid .v { color: var(--muted); font-size: 0.74rem; word-break:
  break-all; }

/* Two-pane grid */
.panes {
  display: grid;
  grid-template-columns: 1fr 1fr;
  gap: 1rem;
}
@media (max-width: 700px) {
  .panes { grid-template-columns: 1fr; }
}
.pane {
  background: var(--card);
  border: 1px solid var(--border);
  border-radius: 10px;
  padding: 1rem 1.1rem;
}
.pane h2 {
  font-size: 0.78rem;
  font-weight: 600;
  letter-spacing: 0.06em;
  text-transform: uppercase;
  color: var(--muted);
  margin: 0 0 0.7rem 0;
}

/* Publish form */
label.field {
  display: block;
  margin-bottom: 0.7rem;
}
label.field span {
  display: block;
  font-size: 0.74rem;
  color: var(--muted);
  margin-bottom: 0.2rem;
}
input[type="text"] {
  width: 100%;
  padding: 0.6rem 0.7rem;
  border: 1px solid var(--border);
  border-radius: 6px;
  font-family: inherit;
  font-size: 1rem;
  color: var(--ink);
  background: white;
  transition: border-color 0.15s, box-shadow 0.15s;
}
input[type="text"]:focus {
  outline: none;
  border-color: var(--accent);
  box-shadow: 0 0 0 3px var(--accent-soft);
}
button.publish {
  width: 100%;
  padding: 0.75rem 1rem;
  border: none;
  border-radius: 6px;

```

```

        background: var(--accent);
        color: white;
        font-family: inherit;
        font-size: 1rem;
        font-weight: 600;
        cursor: pointer;
        transition: background 0.15s;
        margin-top: 0.3rem;
    }
    button.publish:hover { background: #1d5959; }
    button.publish:active { background: #144545; }
    button.publish:disabled { background: #9aafad; cursor: not-allowed; }

    /* Subscribe feed */
    .feed {
        min-height: 220px;
        max-height: 420px;
        overflow-y: auto;
        display: flex;
        flex-direction: column;
        gap: 0.5rem;
    }
    .feed .empty {
        color: var(--muted);
        font-style: italic;
        font-size: 0.92rem;
        padding: 0.4rem 0;
    }
    .msg {
        padding: 0.55rem 0.7rem;
        background: var(--tile-bg);
        border-radius: 6px;
        font-size: 0.95rem;
    }
    .msg .meta {
        font-size: 0.72rem;
        color: var(--muted);
        margin-bottom: 0.15rem;
        display: flex;
        gap: 0.6rem;
        align-items: baseline;
    }
    .msg .name { font-weight: 600; color: var(--accent); }
    .msg .time { font-variant-numeric: tabular-nums; }
    .msg .body { color: var(--ink); white-space: pre-wrap; word-wrap: break-
word; }

    /* Footer */
    footer {
        margin-top: 1.6rem;
        padding-top: 0.9rem;
        border-top: 1px solid var(--border);
        font-size: 0.74rem;
        color: var(--muted);
        display: flex;
        justify-content: space-between;
        gap: 1rem;
        flex-wrap: wrap;
        font-family: ui-monospace, 'SF Mono', Menlo, monospace;
    }
    footer a { color: var(--accent); text-decoration: none; }
    footer a:hover { text-decoration: underline; }
</style>
</head>
<body>
<div class="wrap">

<header>

```



```

    <h1>Axona Demo</h1>
    <div class="status" id="status">...connecting</div>
</header>

<div class="dots" id="dots" aria-label="connected peers"></div>

<div class="topic-row">
  <div class="tile topic">
    <span class="k">Topic</span>
    <span class="v">hello-world</span>
  </div>
  <div class="tile prefix">
    <span class="k">Anchor</span>
    <span class="v" id="prefix">-</span>
  </div>
  <div class="tile topicid">
    <span class="k">Topic ID</span>
    <span class="v" id="topicId">-</span>
  </div>
</div>

<div class="panes">
  <div class="pane">
    <h2>Publish</h2>
    <label class="field">
      <span>Name</span>
      <input type="text" id="nameInput" value="Alice" autocomplete="off"
autocapitalize="words">
    </label>
    <label class="field">
      <span>Message</span>
      <input type="text" id="msgInput" value="Hello, world." autocomplete="
off">
    </label>
    <button class="publish" id="pubBtn" disabled>Publish</button>
  </div>

  <div class="pane">
    <h2>Subscribe</h2>
    <div class="feed" id="feed">
      <span class="empty">Waiting for ...messages</span>
    </div>
  </div>
</div>

<footer>
  <span>demo v<span id="demoVer">...</span> · kernel v<span id="kernelVer">...</
span></span>
  <a href="https://github.com/axona-net/axona-protocol">source</a>
</footer>

</div>

<script type="module">
import {
  AxonaPeer, AxonaDomain, NeuronNode,
  deriveIdentity, deriveTopicId, geoCellId,
} from '/src/index.js';
import { webTransport } from '/src/transport/web/index.js';

// Constants
// Bump the middle digit on every code change to this file so the
// footer reflects what's actually running and stale browser tabs are
// distinguishable.
const DEMO_VERSION = '1.6.0';
const BRIDGE_URL = new URLSearchParams(window.location.search).get('bridge')
|| 'wss://bridge.axona.net';
const VIRGINIA = { lat: 38.0, lng: -77.0 };

```

```

// axona-peer composes topic names as `${regionId}/${eventName}` (see
// axona-peer/src/client.js line 1230). Use the same composition here
// so the demo's hello-world topic at us-east is the EXACT topic that
// axona-peer subscribers on us-east/hello-world see. Without this,
// the 0x89 anchor matches but the body hash differs and the two apps
// never converge. EVENT is what we show in the UI tile; TOPIC is
// what crosses the wire.
const REGION_ID = 'us-east';
const EVENT = 'hello-world';
const TOPIC = `${REGION_ID}/${EVENT}`;
const MAX_DOTS = 100;

// DOM
const $dots = document.getElementById('dots');
const $status = document.getElementById('status');
const $prefix = document.getElementById('prefix');
const $topicId = document.getElementById('topicId');
const $kernel = document.getElementById('kernelVer');
const $name = document.getElementById('nameInput');
const $msg = document.getElementById('msgInput');
const $pubBtn = document.getElementById('pubBtn');
const $feed = document.getElementById('feed');

// Footer versions
document.getElementById('demoVer').textContent = DEMO_VERSION;
try {
  const pkg = await fetch('/package.json').then(r => r.json());
  $kernel.textContent = pkg.version;
} catch { $kernel.textContent = '?'; }

// Topic info (Virginia-anchored)
const virginiaPrefix = geoCellId(VIRGINIA.lat, VIRGINIA.lng, 8);
$prefix.textContent = '0x' + virginiaPrefix.toString(16).padStart(2, '0').
  toUpperCase();

// Synthetic publisher: nodeId-shaped hex whose top 8 bits = Virginia
// S2 cell. Anchors the topic at Virginia regardless of where the
// subscribing peer lives - every demo user worldwide computes the
// same topicId.
const publisher = virginiaPrefix.toString(16).padStart(2, '0') + '0'.repeat
  (64);
const topicId = await deriveTopicId(publisher, TOPIC);
$topicId.textContent = topicId.slice(0, 12) + ...' + topicId.slice(-6);

// Geolocation (for our own identity only)
async function getLocation() {
  // Even if denied, identity falls back to (0, 0) → cell 0x10 (Gulf
  // of Guinea). We never end up with a 0x00 identity prefix unless
  // the user is at the South Pole. The topic anchor above is
  // independent of this - it always stays at Virginia (0x89).
  const FALLBACK = { lat: 0, lng: 0 };
  if (!navigator.geolocation) return FALLBACK;
  return new Promise(resolve => {
    navigator.geolocation.getCurrentPosition(
      pos => resolve({ lat: pos.coords.latitude, lng: pos.coords.longitude })
    ,
      () => resolve(FALLBACK),
      { enableHighAccuracy: false, timeout: 6000, maximumAge: 600_000 },
    );
  });
}
const geo = await getLocation();

// Identity + transport + peer
const identity = await deriveIdentity({ lat: geo.lat, lng: geo.lng });
const transport = webTransport({ bridgeUrl: BRIDGE_URL, identity });
const node = new NeuronNode({ id: BigInt('0x' + identity.id), lat: geo.lat
  , lng: geo.lng });

```

```

node.transport = transport;
const domain   = new AxonaDomain({ k: 20 });
const peer     = new AxonaPeer({ domain, node, identity, transport });

// Peer-state tracking for the dot strip
//
// We render one dot per known peer. Bridge is always the first
// (larger, accent-colored) dot, drawn whenever the bridge connection
// is alive. Each subsequent dot is a WebRTC peer.
//
// open    - green    (bound peer, isConnected = true)
// pending - amber    (in synaptome but not yet bound - fresh signal)
// dead    - grey     (was bound, transport reported death)
//
// Cap at MAX_DOTS; if more peers, we just truncate (rare in a single
// browser tab - typically ~520 connections).
// Render the dot strip directly from transport.boundPeers() - the
// transport's own ground truth. This matches axona-peer's pattern
// (client.js:455 - for each render tick it diffs mesh.peers())
// against the existing rows and DOM-removes anything no longer
// present). There's no separate death-tracking map: a peer that
// dies just stops appearing. No grey-dot accumulation.
let bridgeUp = false;

// Transport callbacks deliver peerIds as BigInts (kernel canonical
// form). Normalise to lowercase 66-char hex for the dot's tooltip.
function asHex(peerId) {
  if (typeof peerId === 'bigint') return peerId.toString(16).padStart(66, '0')
  ;
  if (typeof peerId === 'string') return peerId.toLowerCase();
  return String(peerId);
}

// Map peerHex → its current dot DOM node, so onPingTraffic can flash
// the right dot without re-walking the children every event. Cleared
// on each renderDots(); rebuilt as we create children.
const dotByPeer = new Map();
let bridgeDot = null;

function renderDots() {
  $dots.innerHTML = '';
  dotByPeer.clear();
  // Bridge dot first
  bridgeDot = document.createElement('div');
  bridgeDot.className = 'dot bridge' + (bridgeUp ? ' open' : ' pending');
  bridgeDot.title = 'bridge';
  $dots.appendChild(bridgeDot);
  // Currently-bound peers (kernel reports only live channels)
  const peers = [...(transport.boundPeers?.() || [])].slice(0, MAX_DOTS - 1);
  for (const peerId of peers) {
    const hex = asHex(peerId);
    const d = document.createElement('div');
    d.className = 'dot open';
    d.title = hex.slice(0, 12) + ...'';
    $dots.appendChild(d);
    dotByPeer.set(hex, d);
  }
}

renderDots();

// v2.0.2: pulse a dot on every ping-sent / pong-received frame on
// that peer's channel. Class is removed 400 ms later so a steady
// 1 Hz traffic looks like a soft, regular blink and a stalled
// channel goes dim within a second.
function pulse(dot) {
  if (!dot) return;
  dot.classList.add('pulse');
  // clearTimeout existing handle if any, to avoid premature class removal

```

```

    // when two events arrive in quick succession.
    if (dot._pulseTimer) clearTimeout(dot._pulseTimer);
    dot._pulseTimer = setTimeout(() => dot.classList.remove('pulse'), 400);
  }

  transport.onPingTraffic?.((peerId /*, kind */ => {
    const hex = asHex(peerId);
    // Bridge ping/pong attributes to the bridge's nodeId - the same
    // hex appears in boundPeers() as the bridge connection. If the
    // hex matches the bridge's nodeId, pulse the bridge dot; otherwise
    // look up the per-peer dot.
    const bridgeHex = transport.bridgeNodeId ? asHex(transport.bridgeNodeId) :
      null;
    if (bridgeHex && hex === bridgeHex) pulse(bridgeDot);
    else pulse(dotByPeer.get(hex));
  });

  // onPeerBound / onPeerDied are just render triggers - boundPeers()
  // is the source of truth, so we re-read it on every event.
  transport.onPeerBound?.(() => renderDots());
  transport.onPeerDied?.(() => renderDots());

  // Connect
  //
  // Two-phase: transport+peer start first (handshake with the bridge),
  // then wait for the mesh to fill in before subscribing. Subscribing
  // while synaptome.size === 1 (just the bridge) registers our
  // subscription at the bridge only. When other peers come online and
  // other publishers route their `pubsub:publish-k` through a fuller
  // K-closest set, those publishes can miss us because our subscription
  // is anchored at the wrong axon. Gating the subscribe behind a
  // stable synaptome matches axona-peer's manual "Add subscription"
  // pattern and what dht-sim does after warm-up.
  //
  // READY_SYNAPSE_COUNT = bridge + ~3 WebRTC peers; READY_TIMEOUT_MS
  // puts a ceiling on solo-tab runs (when there's no one else to find).
  const READY_SYNAPSE_COUNT = 4;
  const READY_TIMEOUT_MS = 10_000;

  async function waitForMeshReady() {
    const t0 = Date.now();
    while (Date.now() - t0 < READY_TIMEOUT_MS) {
      if (node.synaptome.size >= READY_SYNAPSE_COUNT) return node.synaptome.size;
      ;
      await new Promise(r => setTimeout(r, 200));
    }
    return node.synaptome.size;
  }

  try {
    await transport.start(identity.id);
    await peer.start();
    bridgeUp = true;
    $status.textContent = 'stabilising ...mesh';
    renderDots(); // bridge dot + any peers already bound

    await waitForMeshReady();
    // Subscription happens just below (top-level await) - gate the
    // button on success after sub resolves.
  } catch (err) {
    $status.textContent = 'connection failed';
    console.error('[demo] connect failed', err);
  }

  // Subscribe
  let messageCount = 0;
  function appendMessage(name, body, when) {
    if (messageCount === 0) $feed.innerHTML = '';

```

```

messageCount++;
const msg = document.createElement('div');
msg.className = 'msg';
const meta = document.createElement('div');
meta.className = 'meta';
const nameEl = document.createElement('span');
nameEl.className = 'name';
nameEl.textContent = name;
const timeEl = document.createElement('span');
timeEl.className = 'time';
timeEl.textContent = when.toLocaleTimeString([], { hour: '2-digit', minute:
    '2-digit' });
meta.appendChild(nameEl);
meta.appendChild(timeEl);
const bodyEl = document.createElement('div');
bodyEl.className = 'body';
bodyEl.textContent = body;
msg.appendChild(meta);
msg.appendChild(bodyEl);
$feed.appendChild(msg);
// Auto-scroll to the newest message
$feed.scrollTop = $feed.scrollHeight;
}

const sub = await peer.sub(TOPIC, (envelope) => {
    // Envelopes from the wire are "Name: Body" strings.
    const wire = envelope.message || '';
    const colonAt = wire.indexOf(':');
    const name = colonAt > 0 ? wire.slice(0, colonAt).trim() : '(unknown)';
    const body = colonAt > 0 ? wire.slice(colonAt + 1).trim() : wire;
    appendMessage(name, body, new Date());
}, { publisher, since: 'all' });

// Arm the kernel's AxonaManager periodic refresh timer. By default
// AxonaPeer._buildDefaultAxonaManager() does NOT call am.start() (the
// comment in AxonaPeer.js:1820 says "applications call peer.sub after
// the mesh has stabilised, so the initial K-closest is already wide
// and refresh isn't needed"). That assumption holds for the dht-sim
// simulator's steady-state runs but NOT for a browser mesh, where
// WebRTC peers come and go on every page reload. Without this, a
// subscription registered at the initial K-closest set becomes stale
// as the mesh churns, and publishes routed through a new K-closest
// set miss the stale subscribers. Arming refreshTick at the 10 s
// default keeps the subscription pinned to whoever is K-closest
// right now.
peer._axonaManager?.start?();

// Backstop re-render every 2 s. onPeerBound / onPeerDied catch
// most transitions, but some peers die silently (network drop, page
// suspended, browser throttled tab). A periodic re-read of
// transport.boundPeers() keeps the strip honest without a
// state-tracking map.
setInterval(renderDots, 2000);

// Resume recovery (laptop sleep / tab background)
// The kernel transport already self-heals after a connection freeze:
// dead WebRTC channels are evicted on heartbeat timeout (mesh v2.1.1)
// and the bridge socket auto-reconnects with backoff. This is the
// optional *application-layer* accelerator the peer at axona.net also
// uses - on a genuine resume event, tear the mesh down at once
// (mesh.reset() fires onPeerLost so the synaptome clears too) and force
// an immediate bridge reconnect, so recovery is snappy rather than
// waiting out the per-peer timeouts. A macOS screensaver may fire NONE
// of these events (the tab never goes hidden); that's exactly the case
// the kernel-side eviction backstops.
function onResume(reason) {
    console.log('[demo] resume:', reason);
    try { transport.mesh?.reset?(); } catch { /* mesh may already be gone */ }
}

```

```

    transport.reconnectNow?();
  }
  let hiddenAt = 0;
  document.addEventListener('visibilitychange', () => {
    if (document.visibilityState === 'hidden') { hiddenAt = Date.now(); return;
    }
    if (hiddenAt && Date.now() - hiddenAt >= 5000) onResume('visible');
    hiddenAt = 0;
  });
  window.addEventListener('online', () => onResume('online'));
  window.addEventListener('pageshow', (e) => { if (e.persisted) onResume('
    bfcache'); });

  // Subscription is registered - safe to publish now.
  $status.textContent = 'connected';
  $pubBtn.disabled = false;

  // Publish
  async function publish() {
    const name = ($name.value || 'Alice').trim();
    const msg = ($msg.value || 'Hello, world.').trim();
    if (!msg) return;
    $pubBtn.disabled = true;
    try {
      await peer.pub(TOPIC, name + ': ' + msg, { publisher });
    } catch (err) {
      console.error('[demo] publish failed', err);
    } finally {
      $pubBtn.disabled = false;
      $msg.focus();
      $msg.select();
    }
  }
  $pubBtn.addEventListener('click', publish);
  $msg.addEventListener('keydown', (e) => {
    if (e.key === 'Enter' && !$pubBtn.disabled) publish();
  });
</script>

</body>
</html>

```