 EMPOWERMENT TECHNOLOGY

HTML 5

TUTORIAL FOR BEGINNERS

 Aneesh Yadav

File Edit Selection View Go Run Terminal Help

Headings ×

HTML HEADINGS

- HTML headings are defined with the `<h1>` to `<h6>` tags.
- `<h1>` defines the most important heading. `<h6>` defines the least important heading:
- Example code:

```
<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<h3>This is heading 3</h3>
<h4>This is heading 4</h4>
<h5>This is heading 5</h5>
<h6>This is heading 6</h6>
```

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph ×

HTML PARAGRAPH

- HTML paragraphs are defined with the `<p>` tag:

- Example code:

```
<p>This is a paragraph.</p>
<p>This is another paragraph.</p>
```

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules ×

HTML HORIZONTAL RULES

- The <hr> tag defines a thematic break in an HTML page, and is most often displayed as a horizontal rule.

  The <hr> element is used to separate content (or define a change) in an HTML page:

- Example code:

```
<h1>This is heading 1</h1>
<p>This is some text.</p>
<hr>
<h2>This is heading 2</h2>
<p>This is some other text.</p>
<hr>
```

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules ×

HTML HORIZONTAL RULES

- The `<hr>` tag is an empty tag, which means that it has no end tag.

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks ×

HTML LINE BREAKS

- The HTML <br> element defines a line break.
- Use <br> if you want a line break (a new line) without starting a new paragraph:
- Example code:

```
<p>This is<br>a paragraph<br>with line breaks.</p>
```

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks ×

HTML LINE BREAKS

- The `<br>` tag is an empty tag, which means that it has no end tag.

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links ×

HTML LINKS

- HTML links are defined with the `<a>` tag:
- Example code:

```
<a href="https://www.reallygreatsite.com">This is a link</a>
```

- The link's destination is specified in the href attribute.
- Attributes are used to provide additional information about HTML elements.

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links Images ×

HTML IMAGES

- HTML images are defined with the <img> tag.
- The source file (src), alternative text (alt), width, and height are provided as attributes:
- Example code:

```
<img src="picture.jpg" alt="reallygreatsite.com" width="104"
height="142">
```

HTML 5

HTML FAVICON

- A favicon is a small image, so it should be a simple image with high contrast.
- A favicon image is displayed to the left of the page title in the browser tab, like this:

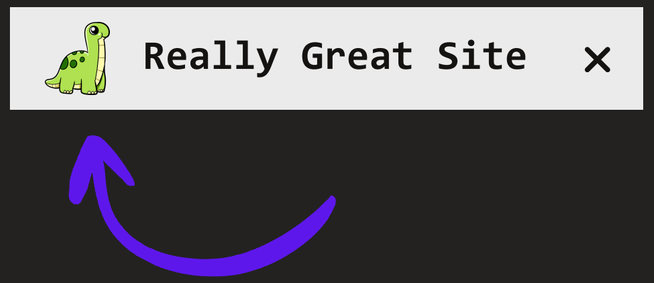

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links Images Favicon ×

HTML FAVICON

- Example code:

```
<!DOCTYPE html>
<html>
<head>
  <title>My Page Title</title>
  <link rel="icon" type="" href=“location and format">
</head>
<body>

<h1>This is a Heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links Images Favicon Lists ×

HTML LIST

- HTML lists allow web developers to group a set of related items in lists.

- An unordered HTML list:
  - Item
  - Item
  - Item
  - Item

- An ordered HTML list:
  1. First item
  2. Second item
  3. Third item
  4. Fourth item

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links Images Favicon Lists ×

UNORDERED LIST

- An unordered list starts with the `<ul>` tag. Each list item starts with the `<li>` tag.
- The list items will be marked with bullets (small black circles) by default:
- Example code:

```
<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>
```

HTML 5

ORDERED LIST

- An ordered list starts with the `<ol>` tag. Each list item starts with the `<li>` tag.
- The list items will be marked with numbers by default:
- Example code:

```
<ol>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ol>
```

ORDERED LISTS TYPE ATTRIBUTE

- The type attribute of the `<ol>` tag, defines the type of the list item marker:

Type	Description
type="1"	The list items will be numbered with numbers (default)
type="A"	The list items will be numbered with uppercase letters
type="a"	The list items will be numbered with lowercase letters
type="I"	The list items will be numbered with uppercase roman numbers
type="i"	The list items will be numbered with lowercase roman numbers

HTML 5

DESCRIPTION LIST

- HTML also supports description lists.
- A description list is a list of terms, with a description of each term.
- The <dl> tag defines the description list, the <dt> tag defines the term (name), and the <dd> tag describes each term:

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links Images Favicon Lists ×

DESCRIPTION LIST

- Example code:

```
<dl>
  <dt>Coffee</dt>
  <dd>- black hot drink</dd>
  <dt>Milk</dt>
  <dd>- white cold drink</dd>
</dl>
```

HTML 5

File Edit Selection View Go Run Terminal Help

Headings Paragraph H_Rules L_Breaks Links Images Favicon Lists Table ×

HTML TABLE

- A table in HTML consists of table cells inside rows and columns.
- Example code:

```
<table>
  <tr>
    <th>Company</th>
    <th>Contact</th>
    <th>Country</th>
  </tr>
  <tr>
    <td>Alfreds Futter</td>
    <td>Maria Anders</td>
    <td>Germany</td>
  </tr>
</table>
```

HTML 5

HTML CELLS

- Each table cell is defined by a `<td>` and a `</td>` tag.
- `td` stands for `table data`.
- Everything between `<td>` and `</td>` are the content of the table cell.

HTML ROWS

- Each table row starts with a `<tr>` and ends with a `</tr>` tag.
- `tr` stands for `table row.`

HTML HEADERS

- Sometimes you want your cells to be table header cells. In those cases use the `<th>` tag instead of the `<td>` tag:
- `th` stands for `table header`.

HTML 5

THANK YOU FOR LISTENING

HTML 5

TUTORIAL FOR BEGINNERS