




PIT histograms with prerank: marginal
Dataset 1: $d=10, \sigma^2=1.0, \tau=1.0, \text{mean} = (-0.50)^{10}$

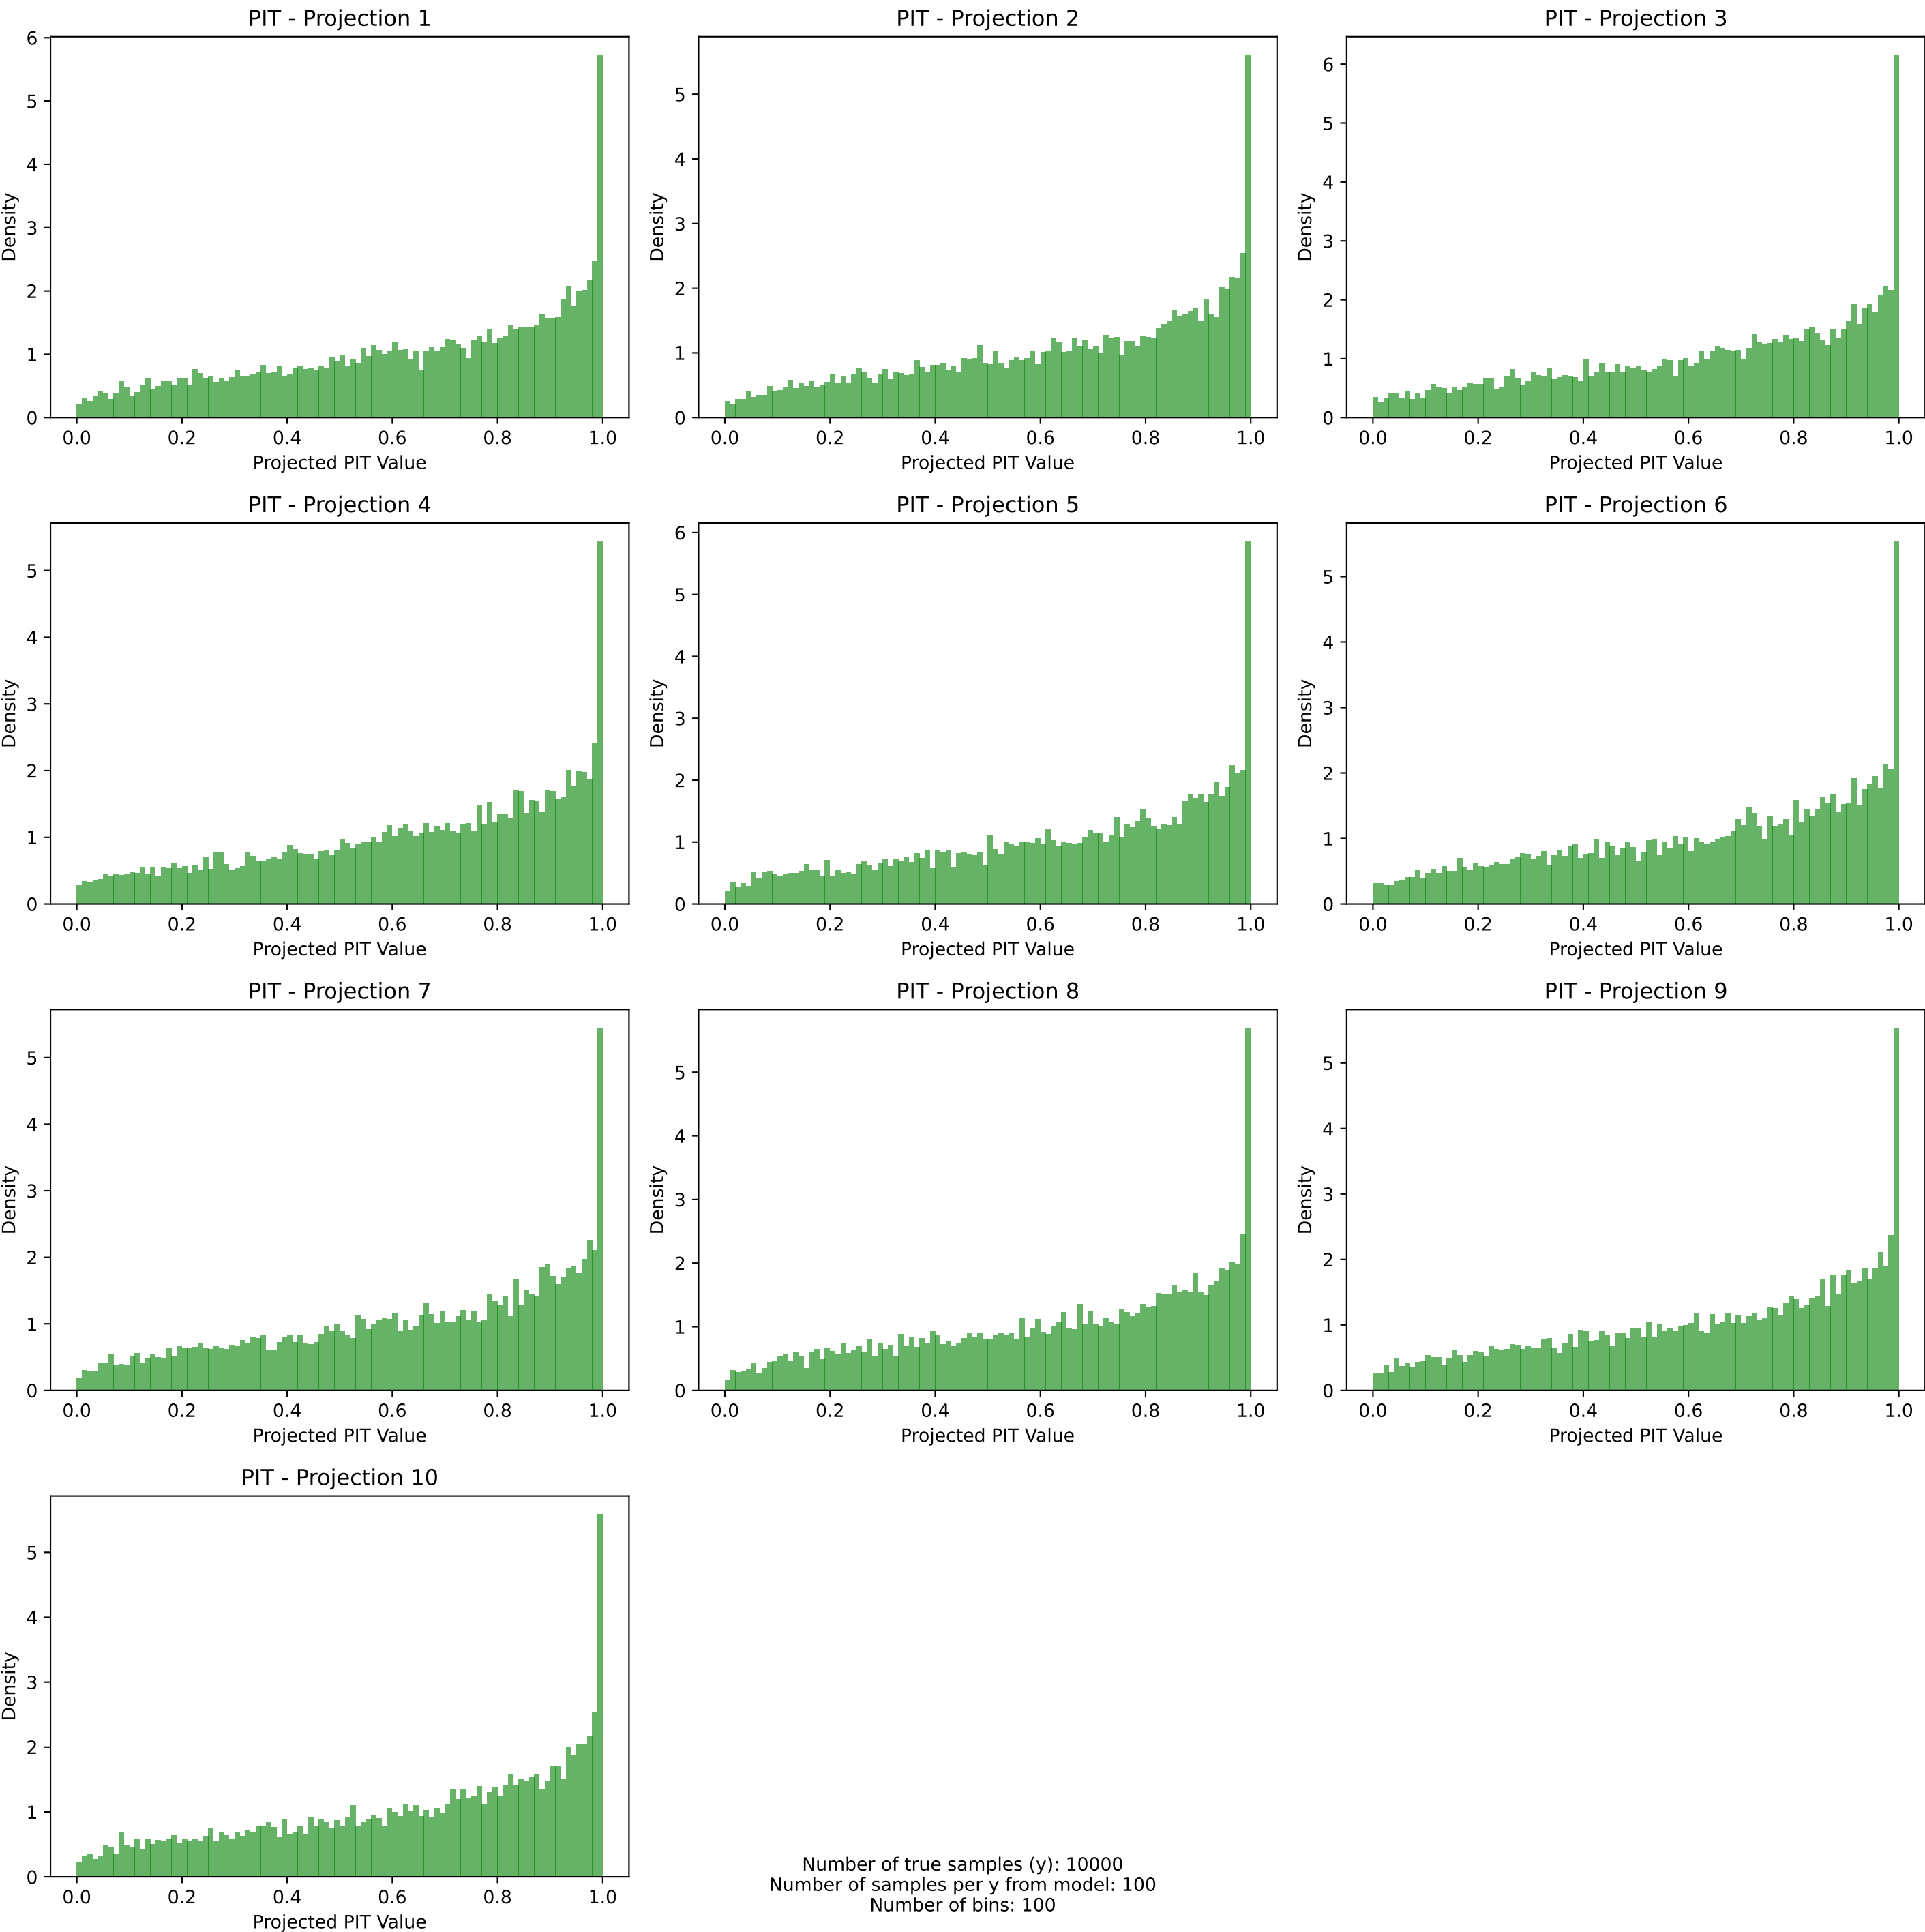


PIT histograms with prerank: marginal
Dataset 2: $d=10$, $\sigma^2=1.0$, $\tau=1.0$, mean = $(0.50)^{10}$

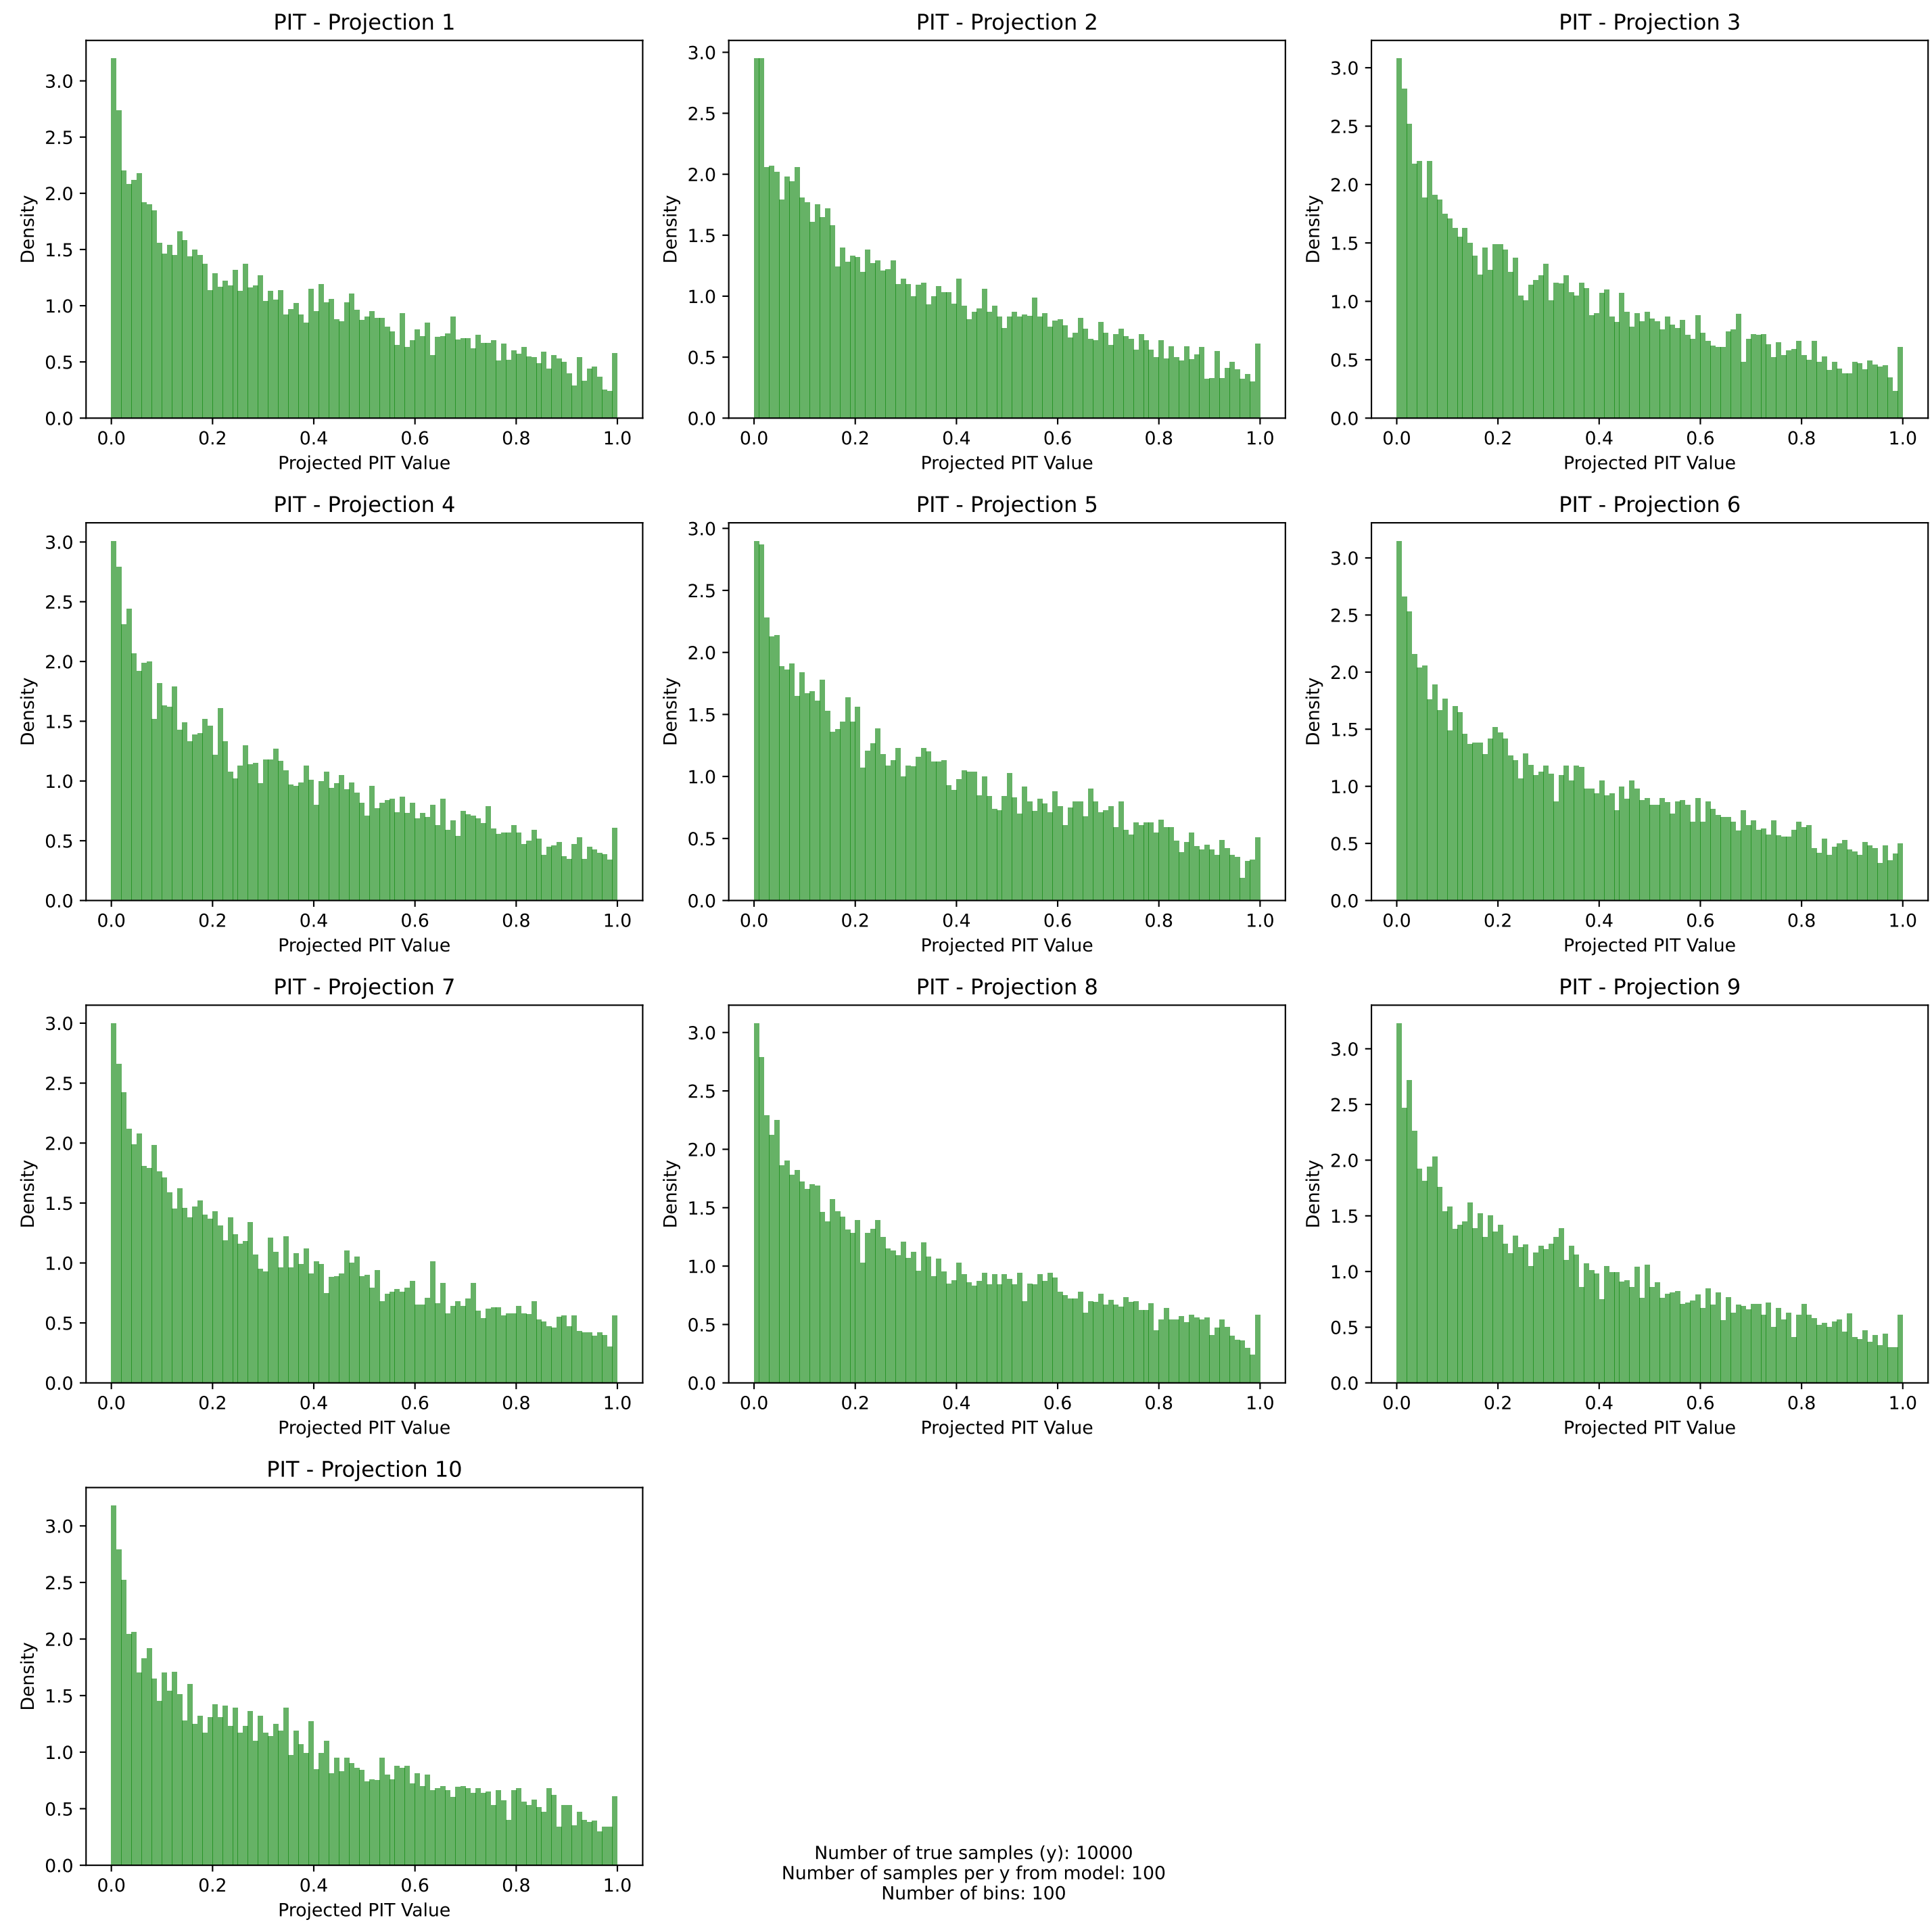


PIT histograms with prerank: marginal
Dataset 3: $d=10$, $\sigma^2=0.85$, $\tau=1.0$, mean = $(0.00)^{10}$

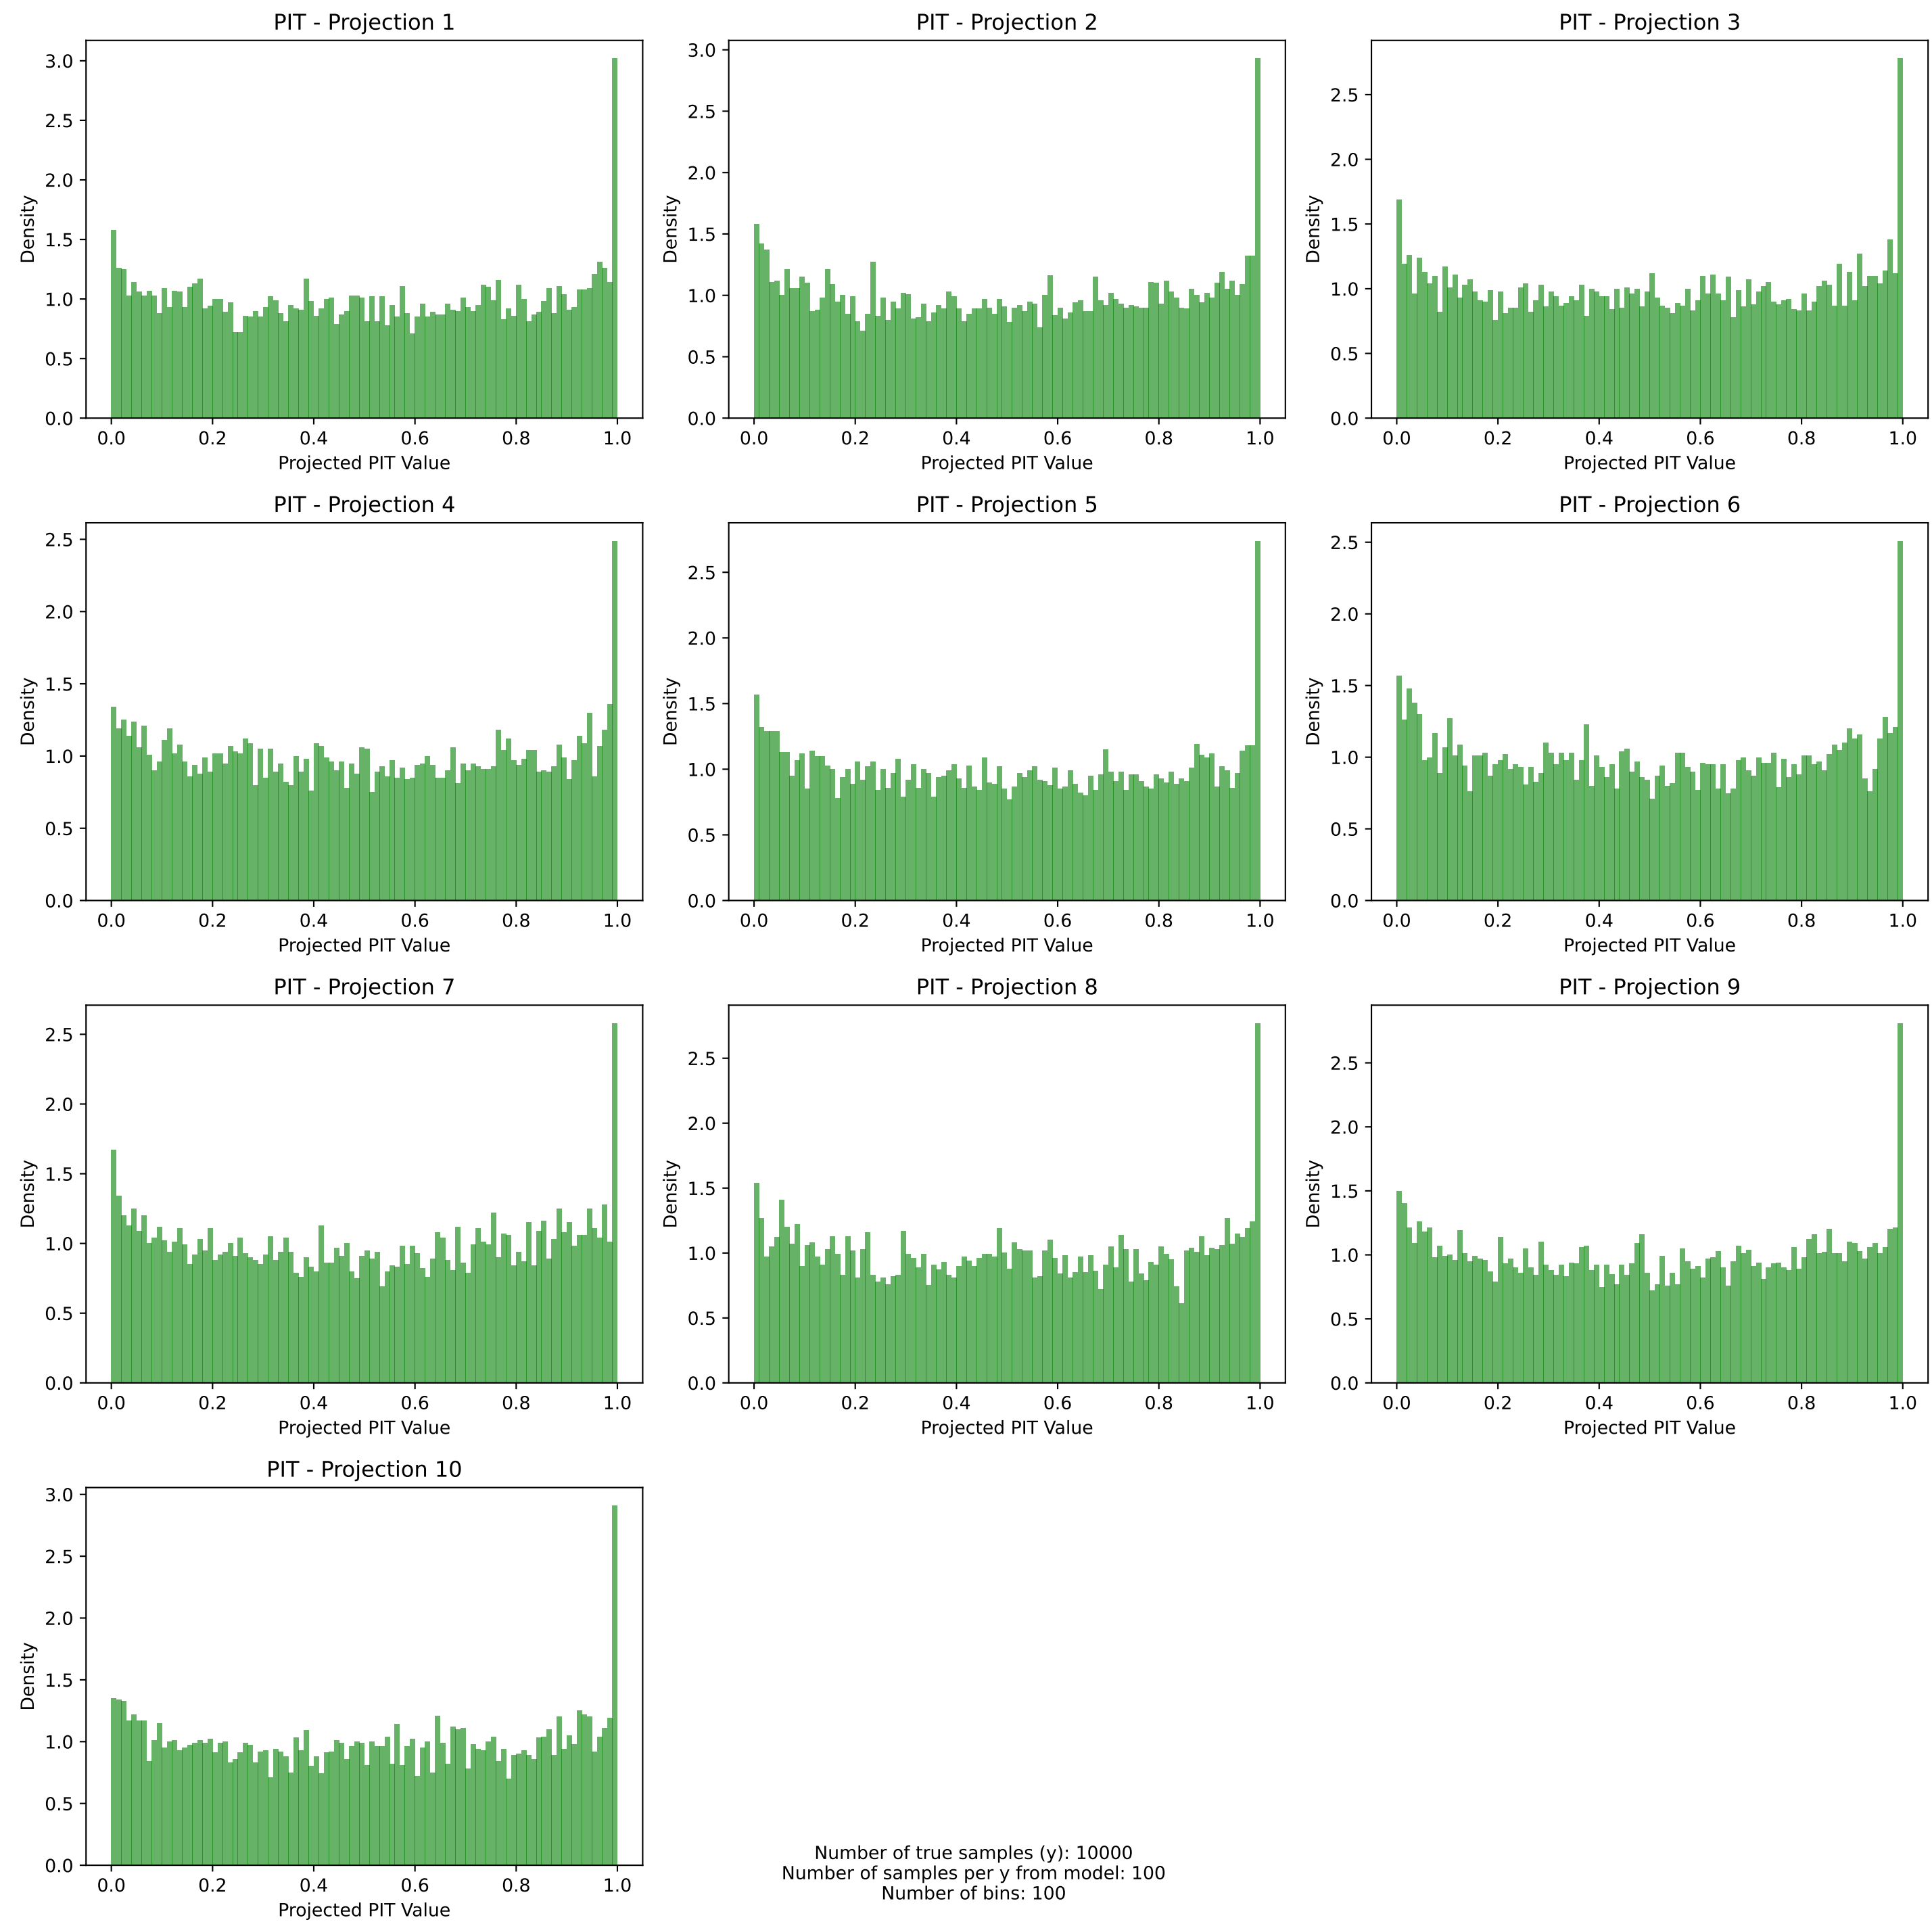

PIT histograms with prerank: marginal
Dataset 4: $d=10$, $\sigma^2=1.25$, $\tau=1.0$, mean = $(0.00)^{10}$

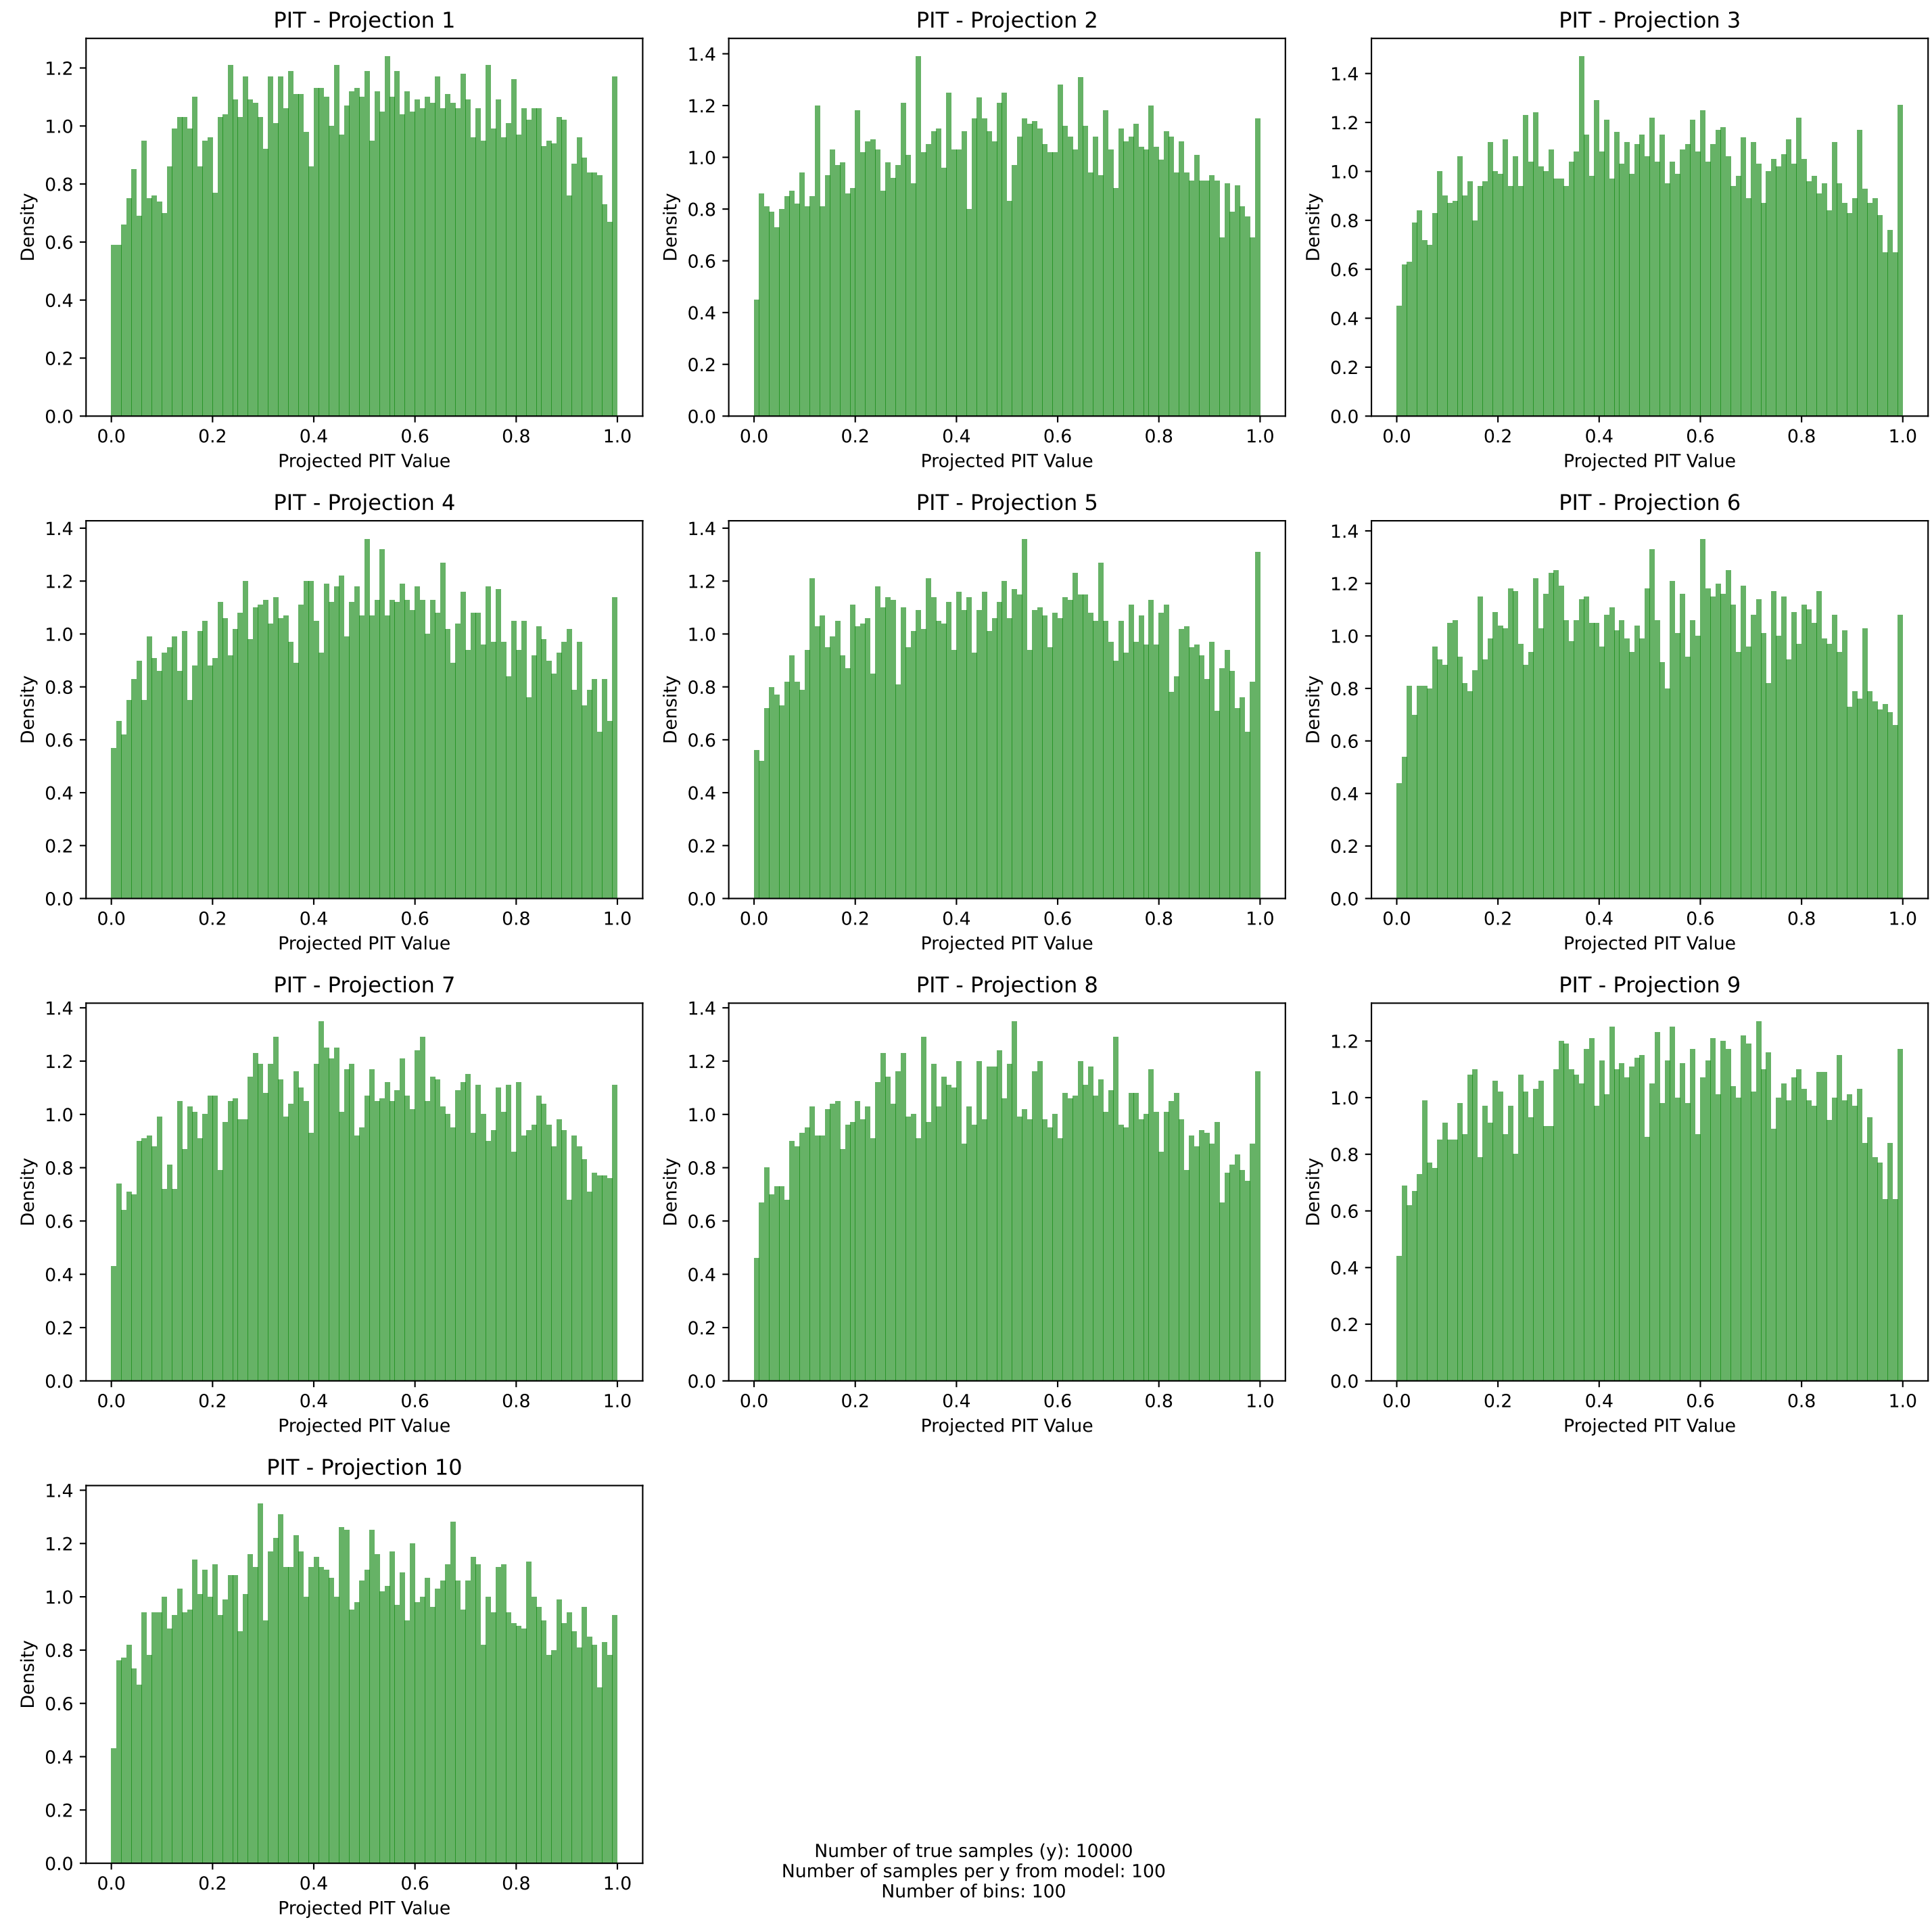

PIT histograms with prerank: marginal
Dataset 5: $d=10$, $\sigma^2=1.0$, $\tau=0.5$, mean = $(0.00)^{10}$

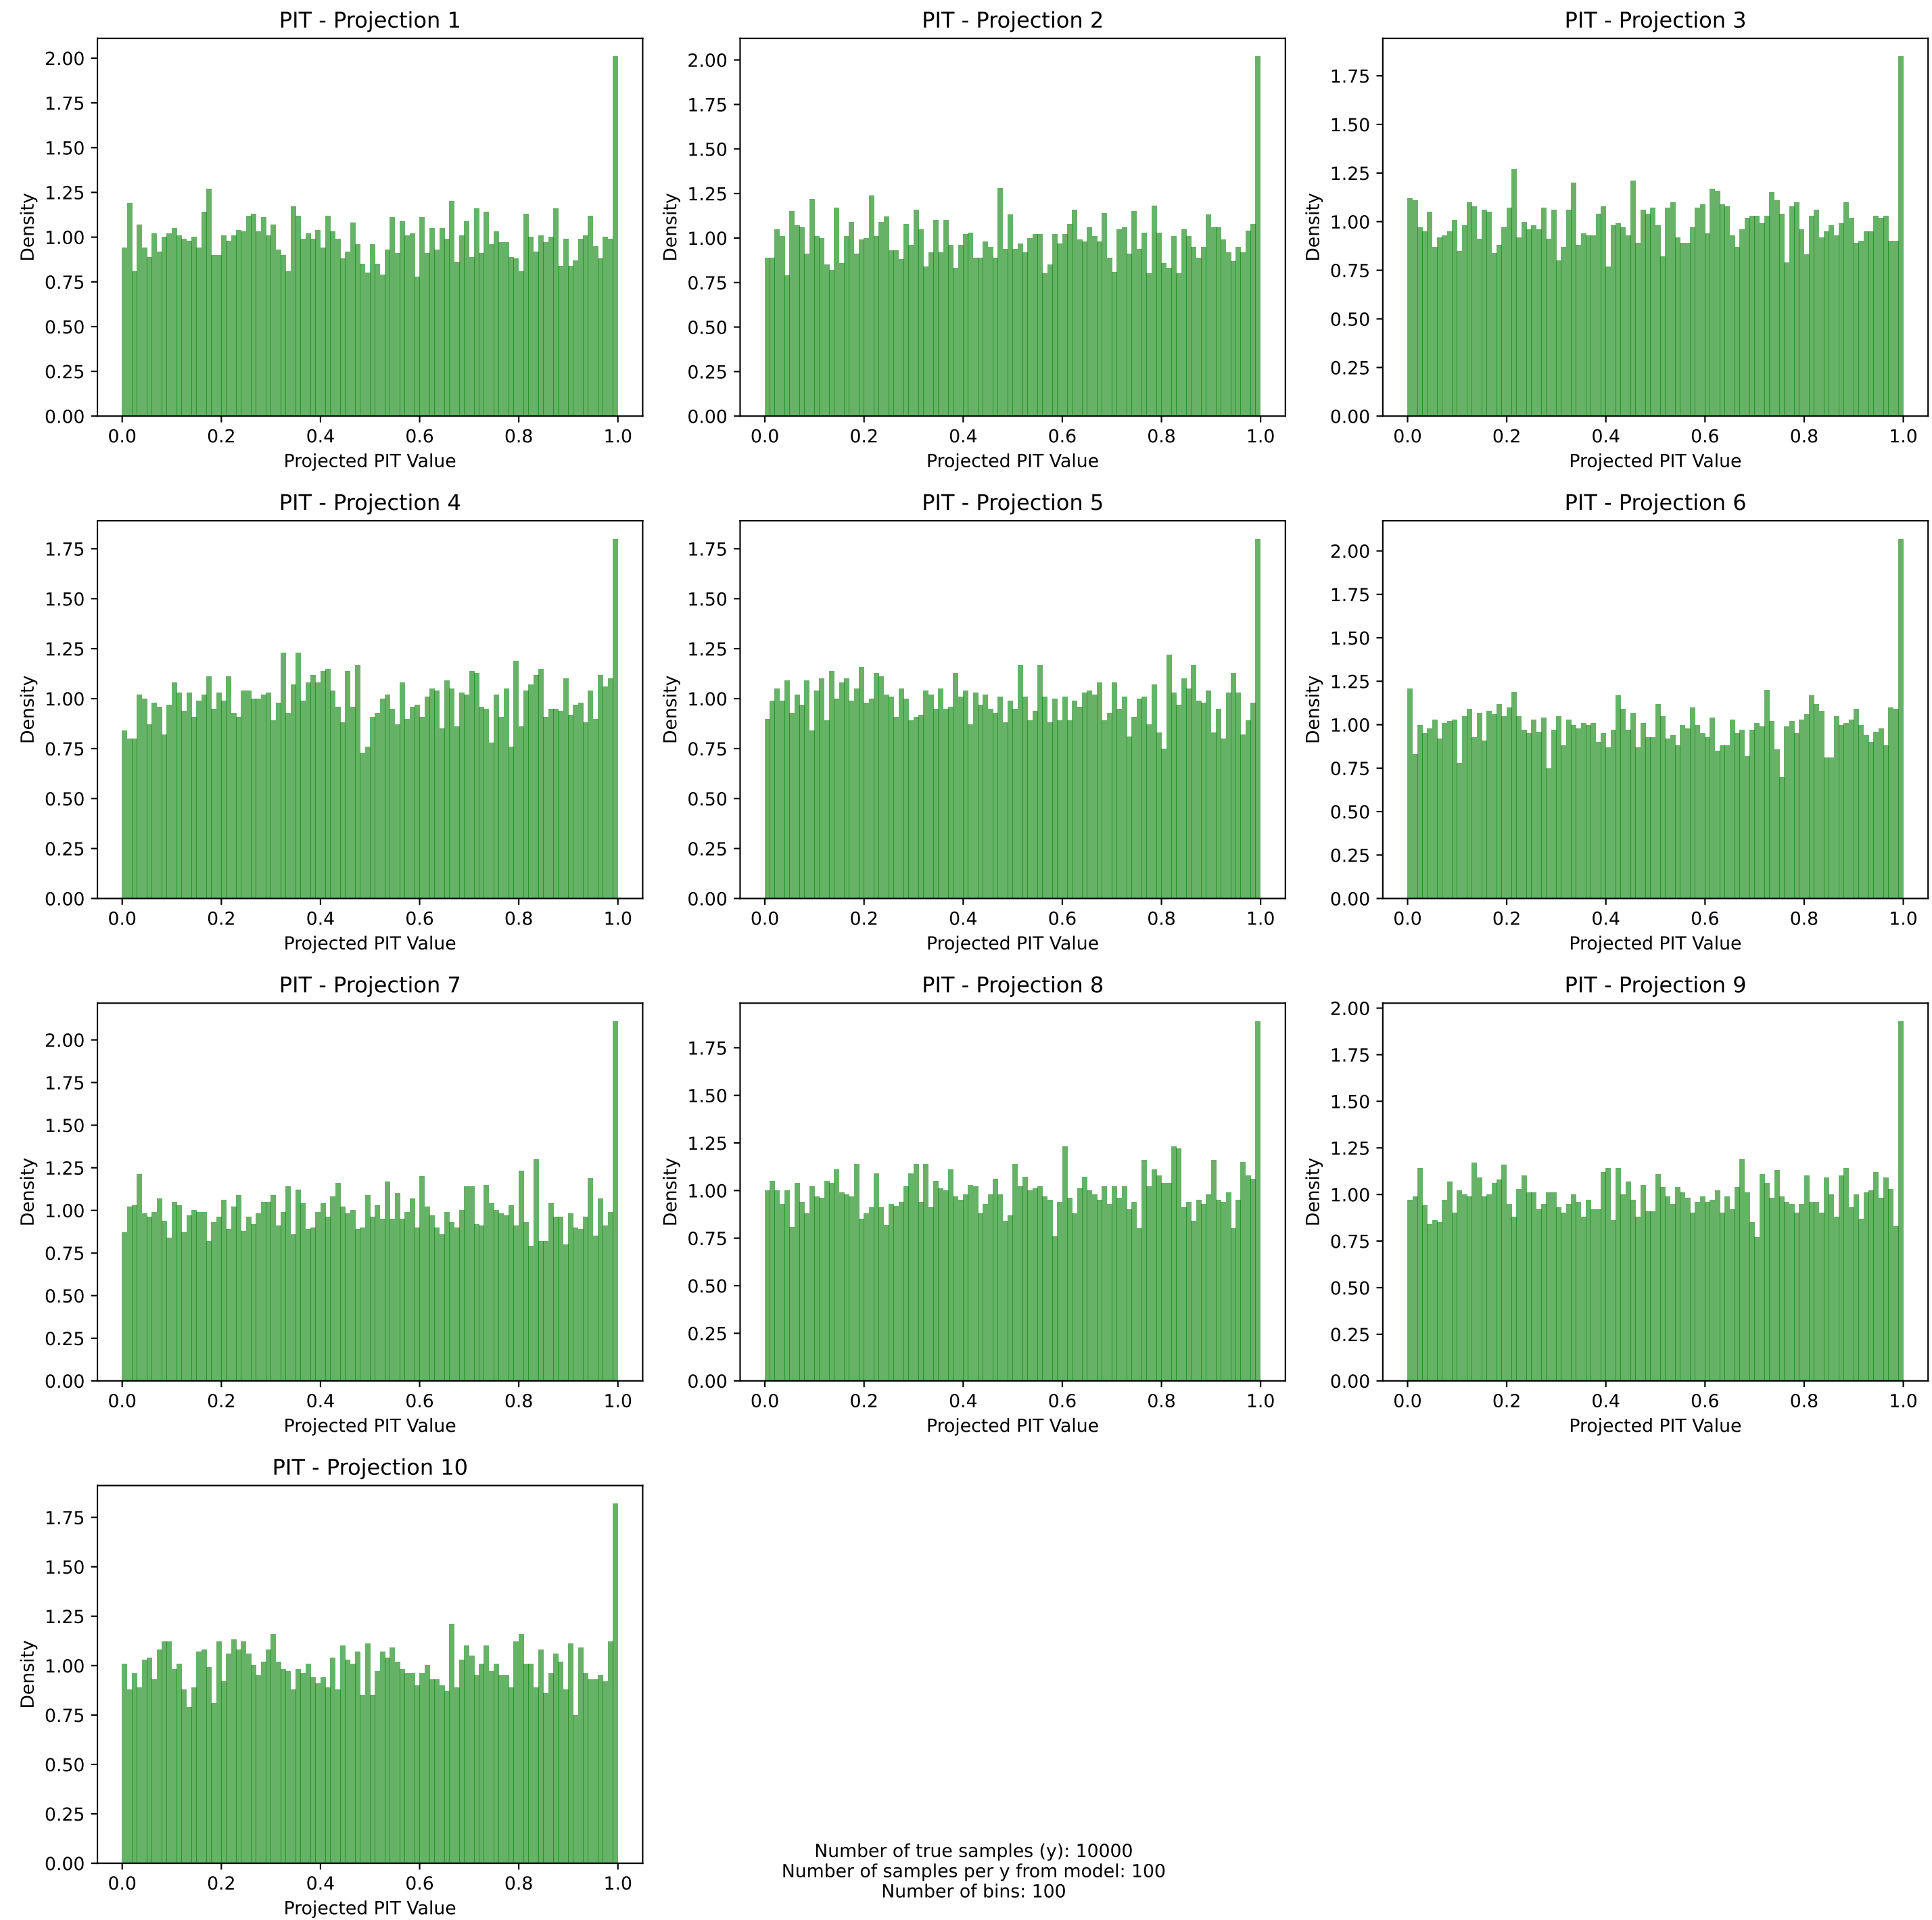

PIT histograms with prerank: marginal
Dataset 6: $d=10$, $\sigma^2=1.0$, $\tau=2.0$, mean = $(0.00)^{10}$

