

QA ENGINEER ASSESSMENT

Part 2: API Testing

Using Postman (or any API client), create and execute test cases for the endpoints below.


For each test, include in your submission:

- **Request details (URL, method, headers, body if any)**
- **Response details (status code, headers, body)**
- **Your short analysis of the result**
- **Include at least 1 edge case for each endpoint**


Endpoints to Test:

1. GET /users - Retrieve all users.

- Request Details

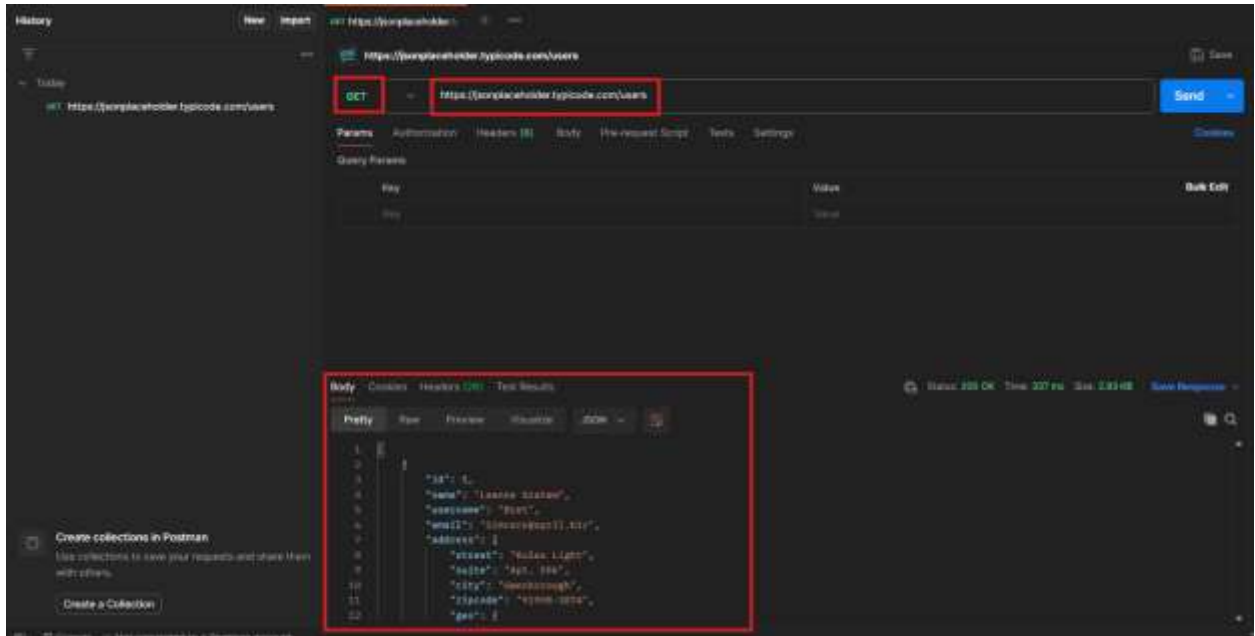

- Response Details

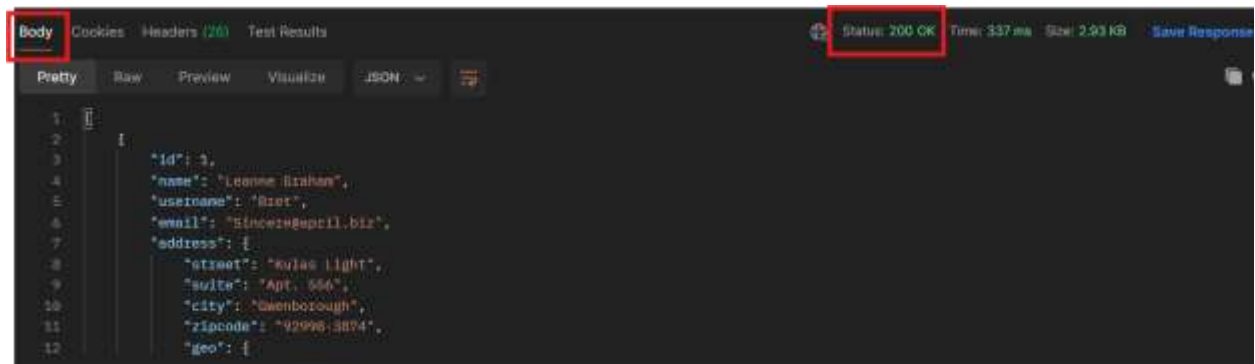

Body	Cookies	Headers (26)	Test Results	Status: 200 OK
Key		Value		
:status		200		
date		Tue, 12 May 2026 23:23:51 GMT		
content-type		application/json; charset=utf-8		

- **Short Analysis:** One the user used the http GET method, it retrieved all the user for particular database table in a form of JSON.


- **Edge Case**

Scenario: The user attempt to access the users list, but there is a typo in users URL.

Postman:

- **Method:** GET
- **URL:** <https://jsonplaceholder.typicode.com/user>


Status Code: 404 Not Found

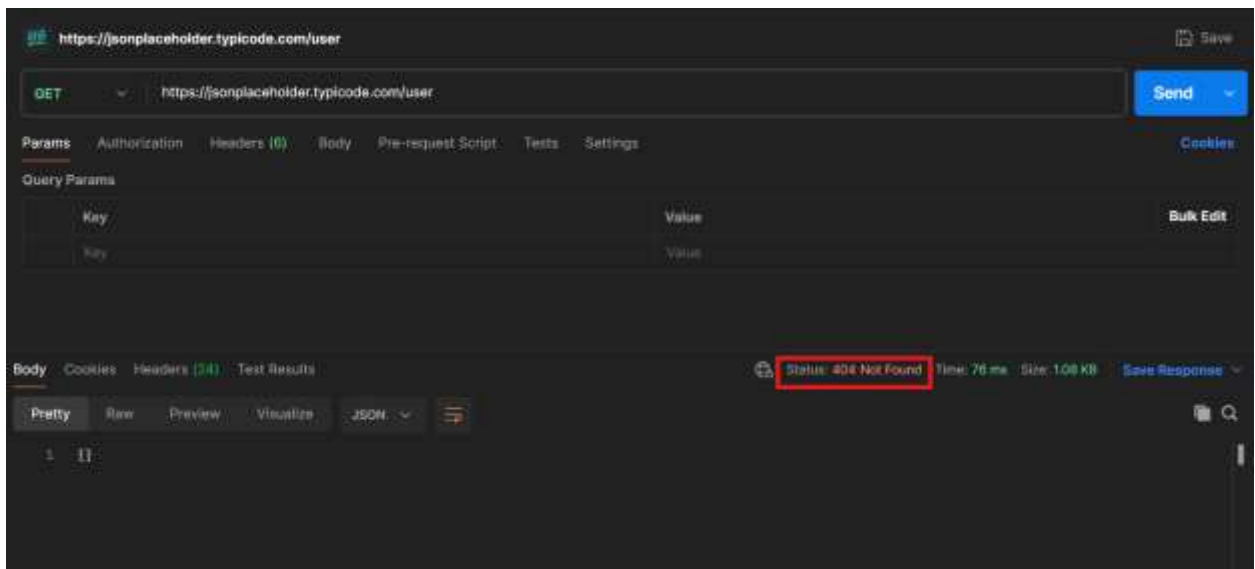

Short Analysis: The user unable to find his requested resource because the requested endpoint consists of minor typographical error, and it demonstrates how API handles incorrect routing.

2. GET /users/1 - Retrieve a specific user.

- Request Details

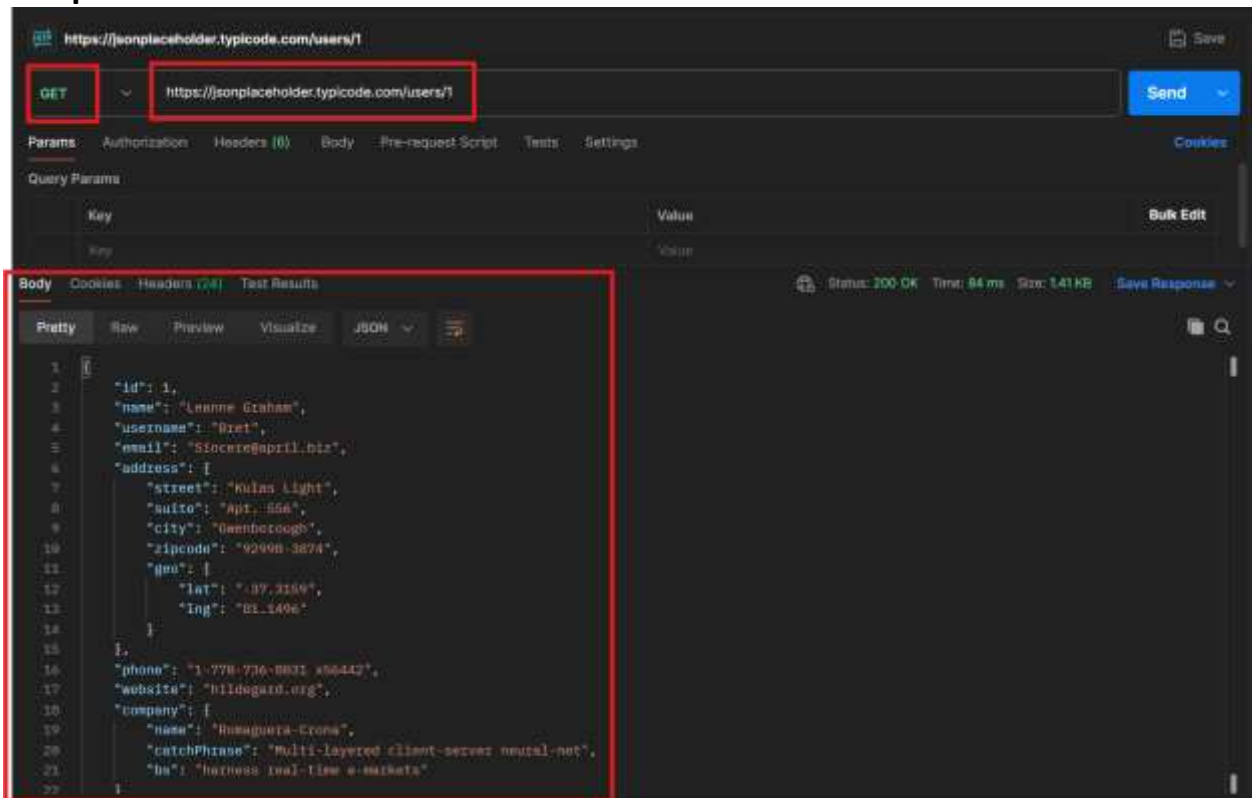


The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** https://jsonplaceholder.typicode.com/users/1
- Status:** 200 OK
- Time:** 84 ms
- Size:** 1.41 KB
- Body (JSON):**

```
{
  "id": 1,
  "name": "Leanne Graham",
  "username": "Bret",
  "email": "Sincere@april.biz",
  "address": {
    "street": "Kulas Light",
    "suite": "Apt. 556",
    "city": "Gwenborough",
    "zipcode": "92998-3874",
    "geo": {
      "lat": "37.3159",
      "lng": "81.1496"
    }
  },
  "phone": "1-778-736-8831 x56442",
  "website": "hildegard.org",
  "company": {
    "name": "Romaguera-Crona",
    "catchPhrase": "Multi-layered client-server neural-net",
    "bs": "harness real-time e-markets"
  }
}
```

- Response Details

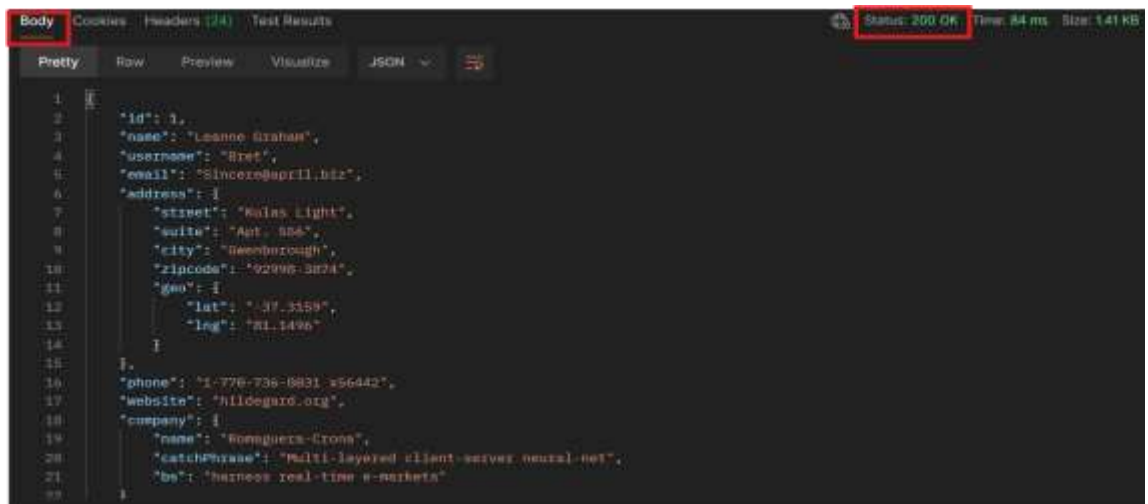

The screenshot shows the response details in a REST client interface with the following details:

- Status:** 200 OK
- Time:** 84 ms
- Size:** 1.41 KB
- Body (JSON):**

```
{
  "id": 1,
  "name": "Leanne Graham",
  "username": "Bret",
  "email": "Sincere@april.biz",
  "address": {
    "street": "Kulas Light",
    "suite": "Apt. 556",
    "city": "Gwenborough",
    "zipcode": "92998-3874",
    "geo": {
      "lat": "37.3159",
      "lng": "81.1496"
    }
  },
  "phone": "1-778-736-8831 x56442",
  "website": "hildegard.org",
  "company": {
    "name": "Romaguera-Crona",
    "catchPhrase": "Multi-layered client-server neural-net",
    "bs": "harness real-time e-markets"
  }
}
```

This screenshot shows the 'Headers' tab of a Postman response. The status is 200 OK, and the content-type is application/json; charset=utf-8.

Key	Value
status	200
date	Wed, 13 May 2026 00:00:11 GMT
content-type	application/json; charset=utf-8


- **Short Analysis:** Once the user used the http GET method and specified the users id, it retrieved all the data for specific user id that declare at the end of the requested resource for particular database table.
- **Edge Case**

Scenario: The user entered a random id for specific user that do not exist in database table.

Postman:

- **Method:** GET
- **URL:** <https://jsonplaceholder.typicode.com/user/1000>

Status Code: 404 Not Found

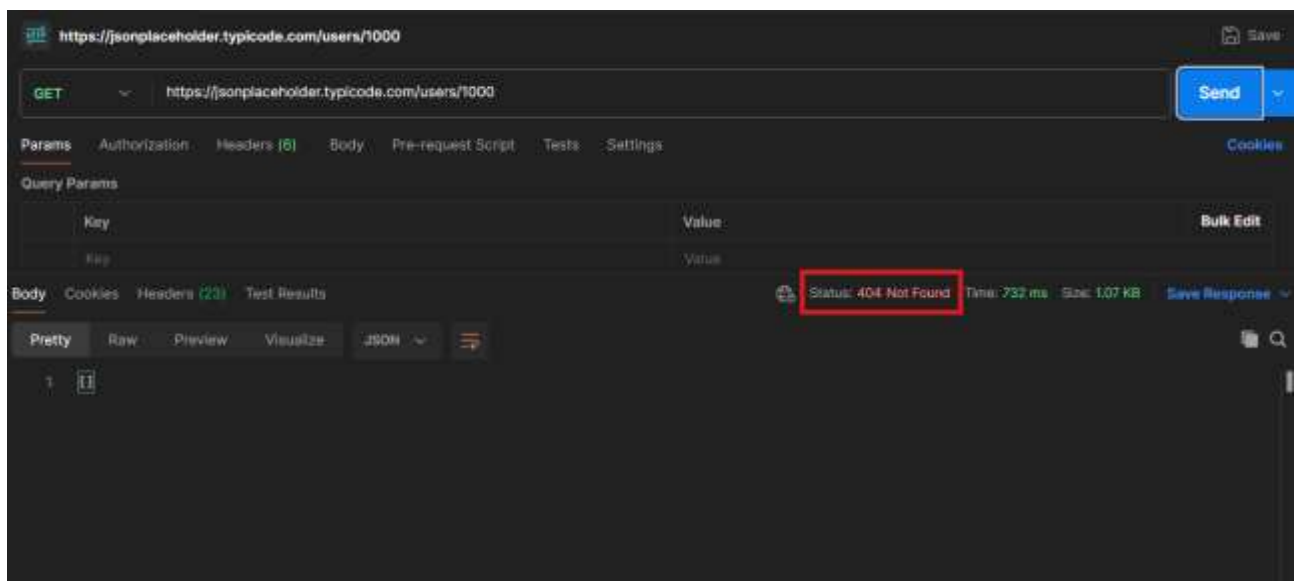

Short Analysis: This shows how system handles request for missing record, instead of returning incorrect data, it returns the status 404 code indicating that the specific resource identifier provided at the end of the URL does not exist in database table.

3. POST /posts - Create a new post with title and body.

- Request Details

The screenshot shows the Postman interface for a POST request to `https://jsonplaceholder.typicode.com/posts`. The request method is **POST** and the URL is `https://jsonplaceholder.typicode.com/posts`. The request body is a JSON object:

```
{
  "title": "HTTP-POST",
  "body": "THIS IS HTTP POST METHOD.",
  "userId": 1
}
```

The response status is **201 Created**, with a response time of 948 ms and a size of 1.2 KB. The response body is a JSON object:

```
{
  "id": 101
}
```

- Response Details

The screenshot shows the Postman interface for the response body. The response status is **201 Created**, with a response time of 948 ms and a size of 1.2 KB. The response body is a JSON object:

```
{
  "id": 101
}
```

The screenshot shows the Postman interface for the response headers. The response status is **201 Created**, with a response time of 948 ms and a size of 1.2 KB. The response headers are:

Key	Value
status	201
date	Wed, 13 May 2026 02:08:23 GMT
content-type	application/json; charset=utf-8

- **Short Analysis:** Once the user used the http POST method to submit new data that contains title and body to the requested resource, the system successfully processed the request, and as evidenced it returns the 201 code meaning it created the data successfully.


- **Edge Case**

Scenario: The user has a missing body.

Postman:

- **Method:** POST
- **URL:** <https://jsonplaceholder.typicode.com/posts>

Status Code: 201 Created

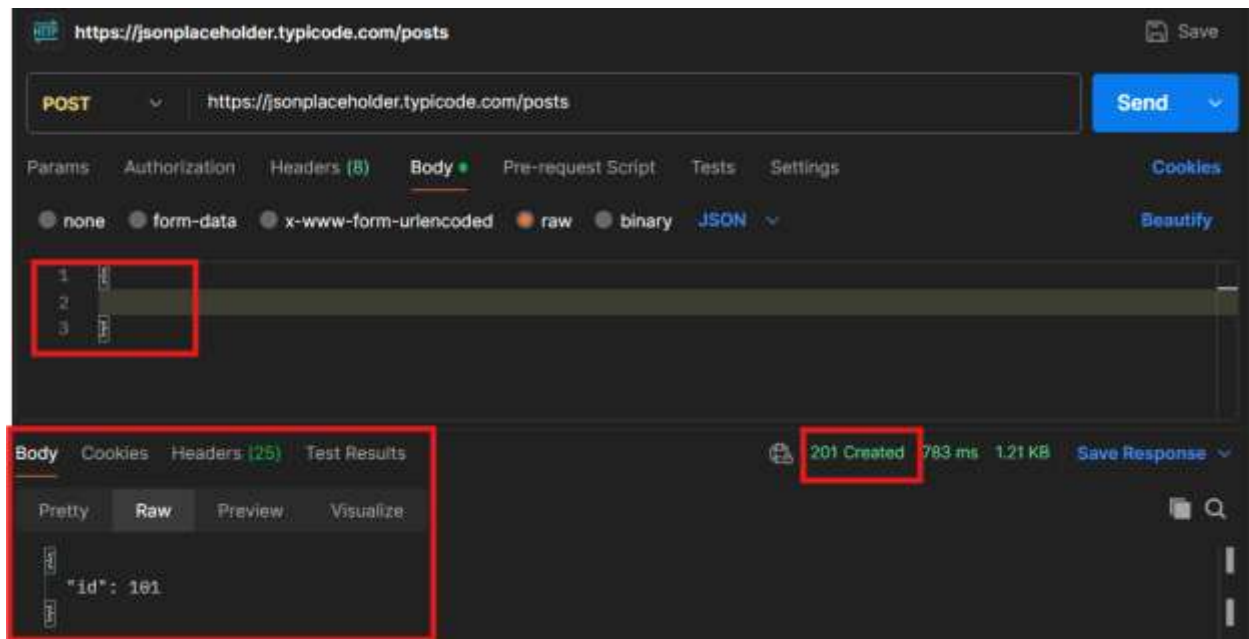

Short Analysis: Once the user used the http POST method to create data with empty body it still returns the 201 code indicating that the data was created successfully because the URL used was a placeholder only in which it serves as temporary table to restore data.

4. PUT /posts/1 - Update an existing post.

- Request Details

The screenshot shows a REST client interface with the following details:

- URL:** `https://jsonplaceholder.typicode.com/posts/1`
- Method:** `PUT`
- Body:**

```
{
  "id": 1,
  "title": "HTTP-PUT",
  "body": "THIS IS HTTP-PUT METHOD",
  "userId": 1
}
```
- Response:** `200 OK`, 915 ms, 1.14 KB

- Response Details

The screenshot shows the response body in the REST client:

```
{
  "id": 1,
  "title": "HTTP-PUT",
  "body": "THIS IS HTTP-PUT METHOD",
  "userId": 1
}
```

The screenshot shows the response headers in the REST client:

Key	Value
<code>:status</code>	200
<code>date</code>	Wed, 13 May 2026 02:59:22 GMT
<code>content-type</code>	<code>application/json; charset=utf-8</code>


- **Short Analysis:** Once the user used the http PUT method to update an existing resource with the unique identifier of 1, the system successfully processed the request, and as evidenced it returns the 200 status code which means it successfully update the specific record for specified user id.
- **Edge Case**

Scenario: The user attempt to update data that do not exist in database table.

Postman:

- **Method:** PUT
- **URL:** <https://jsonplaceholder.typicode.com/posts/1000>

Status Code: 500 Internal Server Error

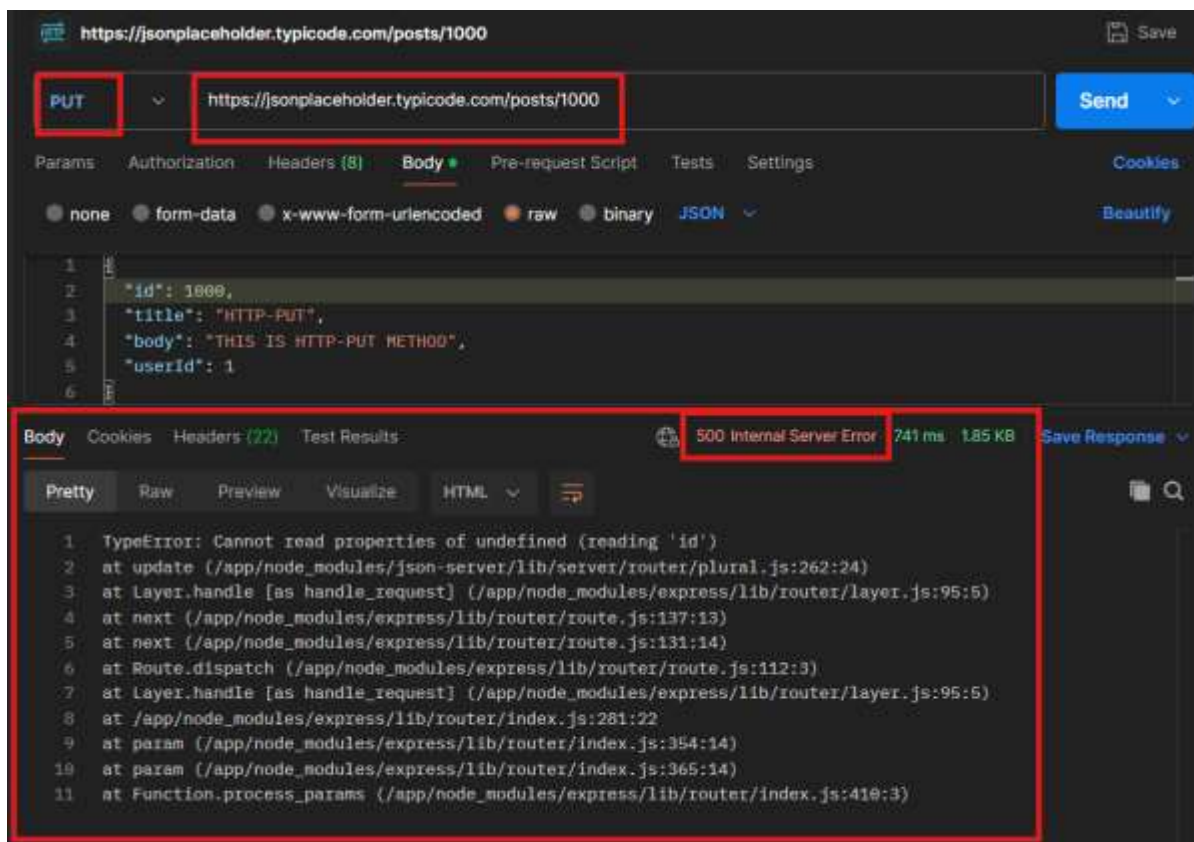

Short Analysis: The user attempt to update a resource that do not exist in database table by using an invalid identifier id, and as evidenced it returns the 500 status code indicating that there's an Internal Server Error and the system failed to process this request because it encountered an error where it couldn't find the record.