FRANTIC-1

Aiysha Frutiger, Denys Verich, Senanur Ates, Sevval Ünlü

01

About the Game

Special Cards & Event Cards

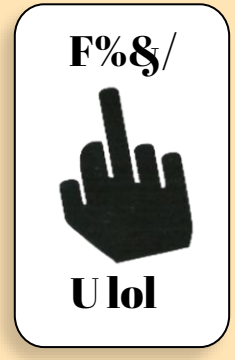

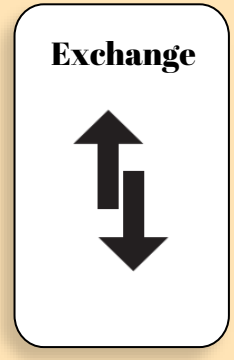

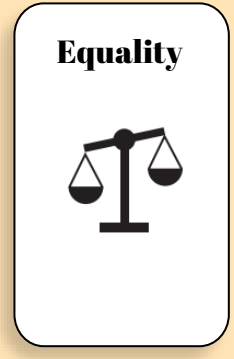

Game Goal

- Get rid of all your cards before anyone else!
- Turn based
- Same color OR Same number
- Special card – use it!
- Have as few points as possible

02

Progress Report

Updates

Changes:

- More Special Cards
- Different Point distribution

Problems:

- JavaFX
- Testing Cards

Responsibilities

Aiysha
Art & Graphics

Developer

Sena
Organization

Developer

Denys
Network

Developer

Sevval
Documentation

Developer

Friday, 20 February, 2026 09:20:34

The Plan

Name	Begin date	End date
Milestone 1	19.02.26	04.03.26
Game Outline	19.02.26	04.03.26
Planning	19.02.26	04.03.26
Milestone 2	05.03.26	16.03.26
Game Prototype	19.02.26	16.03.26
Client-Server.Arch	19.02.26	16.03.26
Chat	19.02.26	16.03.26
Milestone 4	17.03.26	13.04.26
GUI	17.03.26	13.04.26
Game State	17.03.26	13.04.26
Milestone 5	14.04.26	27.04.26
Tests	14.04.26	27.04.26
Game Mechanics	17.03.26	27.04.26
Milestone 6	28.04.26	11.05.26
Manual & Tutorial	28.04.26	11.05.26
QA Report	17.03.26	11.05.26
Sound & Visuals	19.02.26	11.05.26

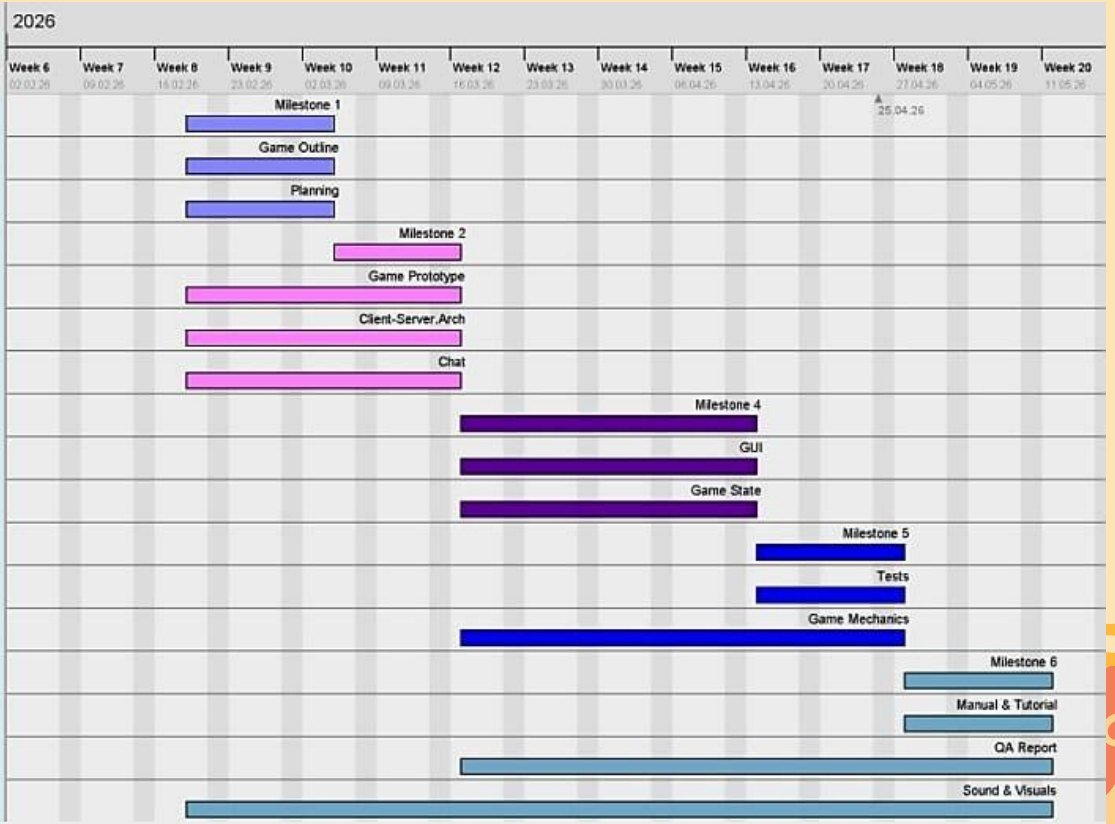

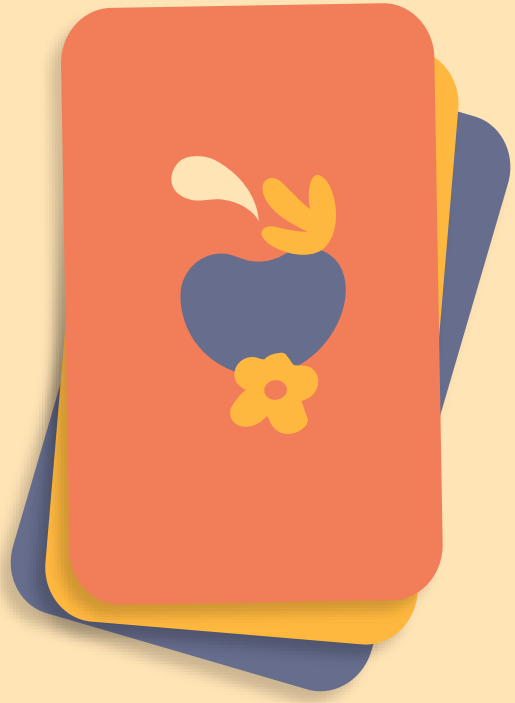

03

QA Concept

QA Report

Collaboration

- Discord & Whatsapp
- Meeting

Version Control

- GitLab
- Stable main branch

Coding

- Java style guides
- Clear seperation of server & client

Tools

- MetricsReloaded
- JaCoCo

QA Measurements

Class-Level Metrics

Avg. per class

AVG. COMMENT LINES / JAVADOC LINES / LINES OF CODE PER CLASS

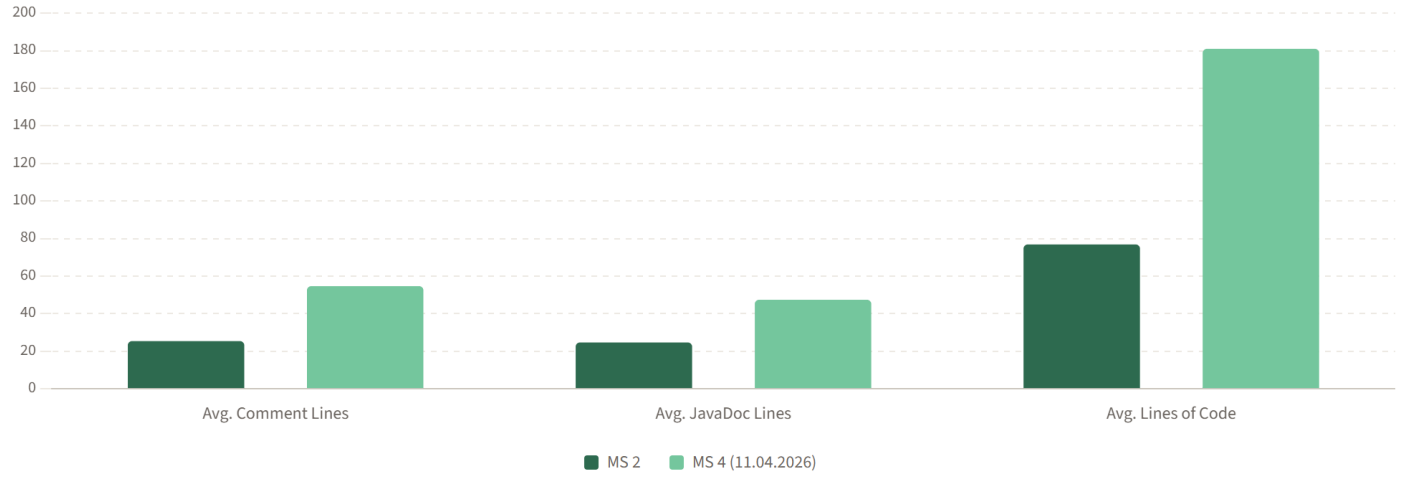

AVG. COMMENT LINES	AVG. JAVADOC LINES	AVG. LINES OF CODE
54.66	47.41	181.03
+115.2% vs MS 2	+92.2% vs MS 2	+135.5% vs MS 2

Method-Level Metrics

Avg. per method

AVG. COMMENT LINES / JAVADOC LINES / LINES OF CODE PER METHOD

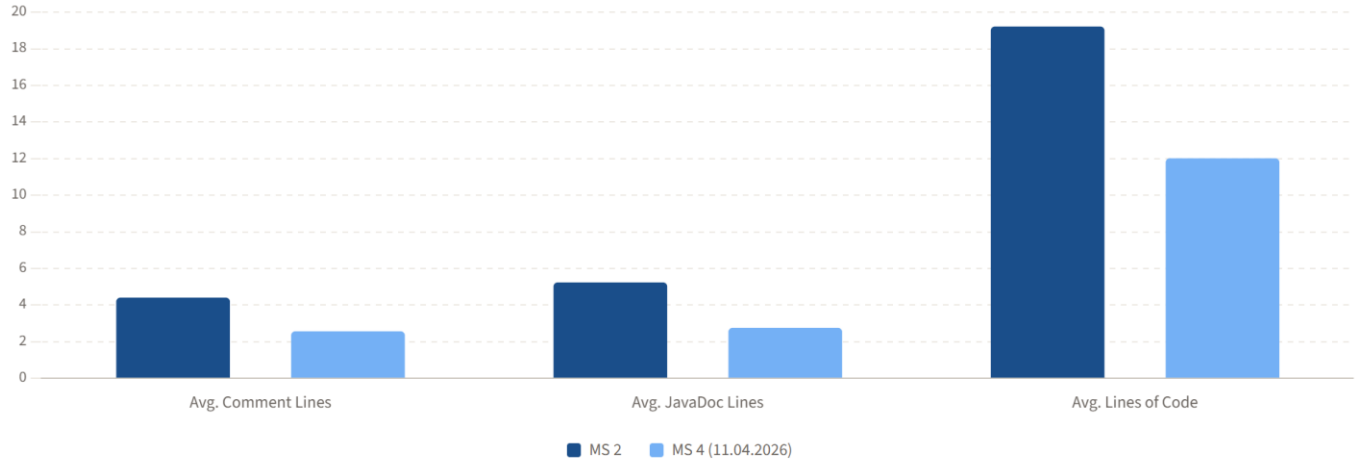

AVG. COMMENT LINES	AVG. JAVADOC LINES	AVG. LINES OF CODE
2.57	2.76	12.02
-41.7% vs MS 2	-47.3% vs MS 2	-37.5% vs MS 2

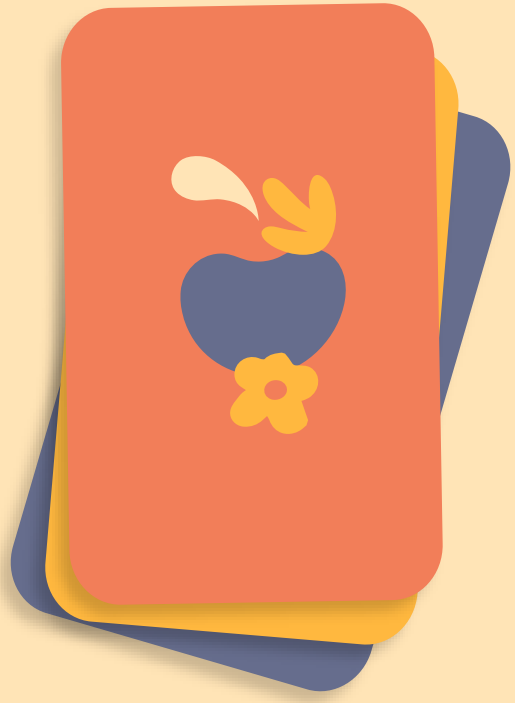

04

Rules to Code

Architecture Overwiev

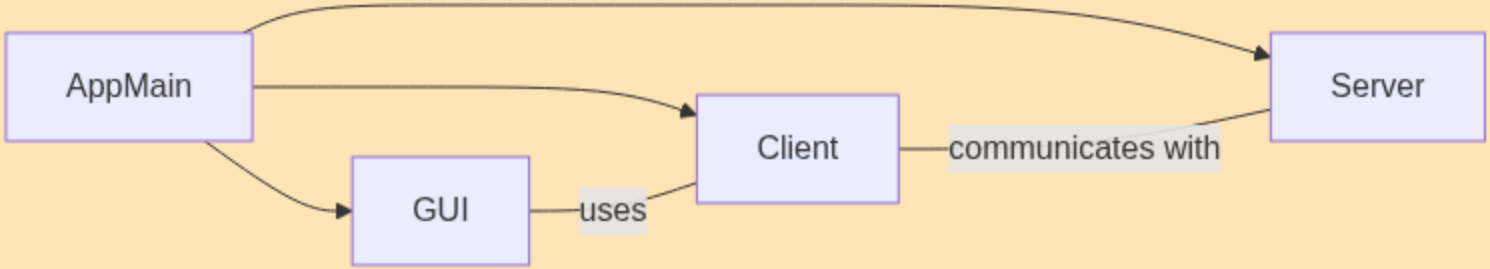

Deep Dive: Server

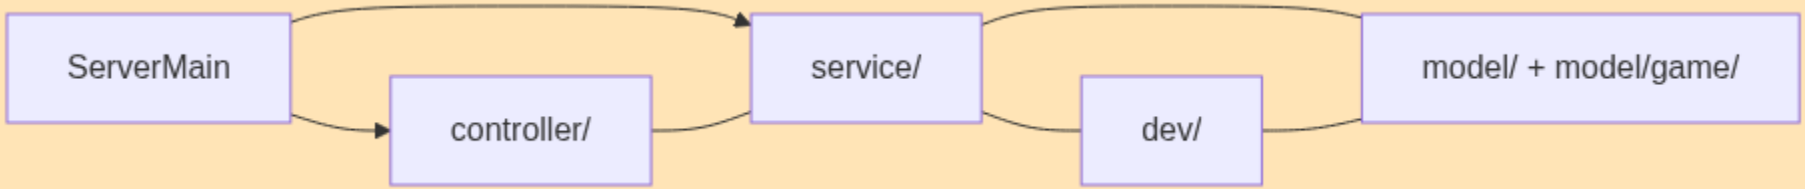

Deep Dive: Client

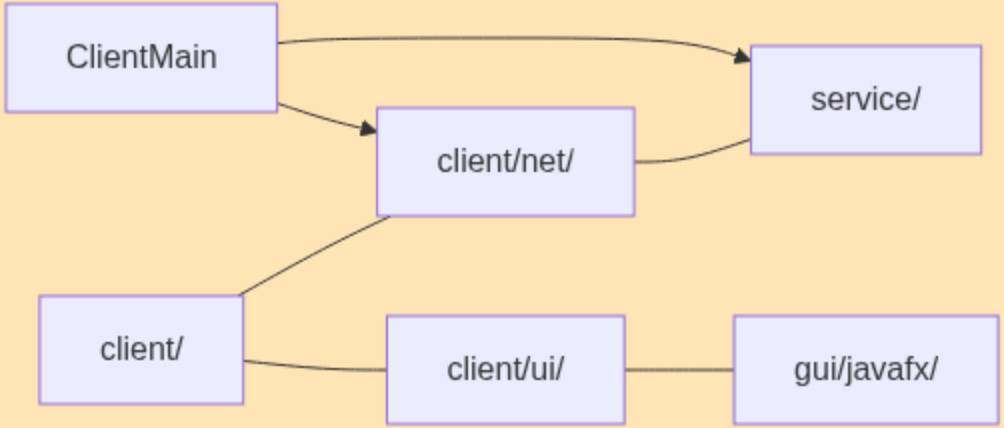

~~Frantic~~ Card Game — Logical Loop

Animated overview of initialization, phase flow, and turn progression

not

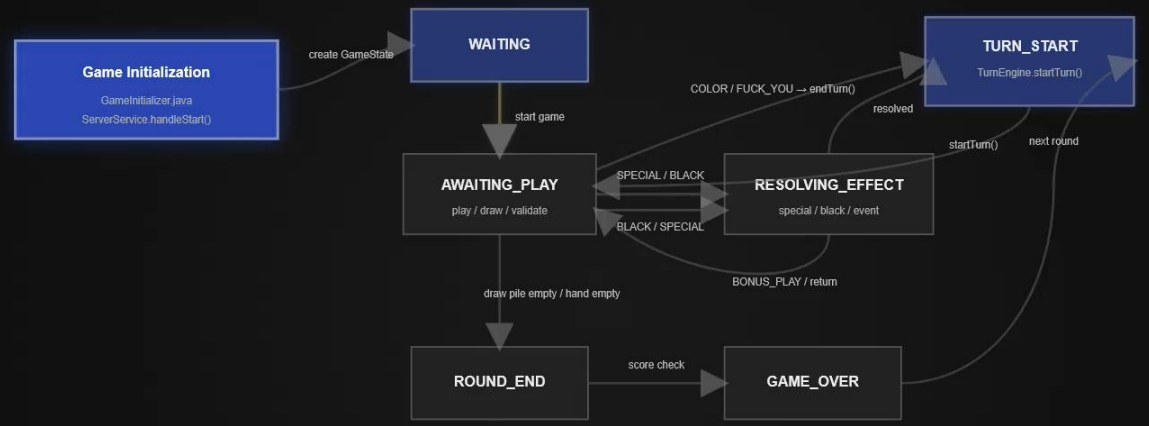

Current Step

1. Initialization

ServerService.handleStart() triggers GameInitializer.java.

- Build main deck and event deck
- Shuffle both decks
- Compute maxScore
- Order players
- Deal 7 cards
- Find a valid starter card
- Return GameState with phase = TURN_START

Pause Prev Next Restart

What this animation shows

1. The server initializes the round
2. The phase machine drives the match flow
3. TURN_START resets the active player's turn state
4. AWAITING_PLAY branches into normal play, effect resolution, or round end

05

Technology

Tools and Libraries

Tools:

- IntelliJ / VS Code
- Code With Me / Code Together
- GitLab
- MetricsReloaded
- Jacoco
- Discord

Libraries:

- AnimateFX

06

Demo

FRANTIC -1

Attribution:

CREDITS: This presentation template was created by **Slidesgo**, including icons by **Flaticon**, and infographics & images by **Freepik**.