



SQL PROJECT FOR PIZZA SALES




● WHERE EVERY SLICE TELLS A STORY



ABOUT US

Hello, my name is Ayan and I utilize this data through SQL queries related to pizza sales.



ALL QUIRIES

Retrieve the total number of orders placed.

Calculate the total revenue generated from pizza sales.

Identify the highest-priced pizza.

Identify the most common pizza size ordered.

List the top 5 most ordered pizza types along with their quantities.

Join the necessary tables to find the total quantity of each pizza category ordered.

Determine the distribution of orders by hour of the day.


Group the orders by date and calculate the average number of pizzas ordered per day.


Determine the top 3 most ordered pizza types based on revenue.

Calculate the percentage contribution of each pizza type to total revenue.

Analyze the cumulative revenue generated over time.

Determine the top 3 most ordered pizza types based on revenue for each pizza category.

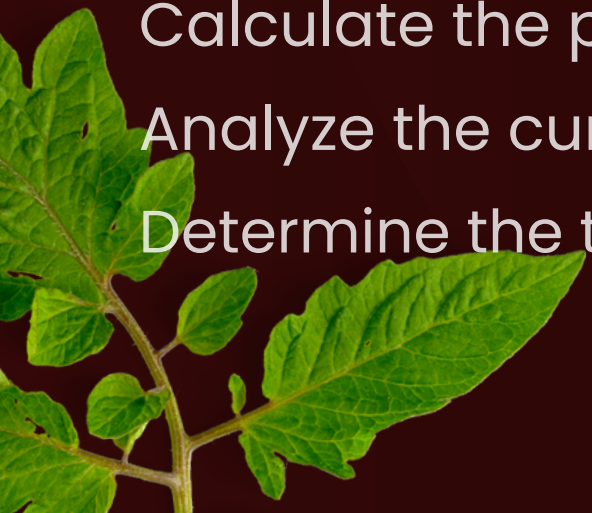



RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED

```
select sum(order_id) as total_orders from orders
```






CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

```
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price)) AS total_sales
FROM
    order_details
    JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```






IDENTIFY THE HIGHEST-PRICED PIZZA.

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC LIMIT 1,1
```





IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
SELECT quantity,COUNT(order_details_id)
from order_details group by quantity;
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC
```





LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5
```






JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```






DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.



```
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time)
```





JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category
```



GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.



```
SELECT
    ROUND(AVG(quantity), 0) AS avg_pizza_perday
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```





DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE

```
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3
```





CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
SELECT
    pizza_types.category,
    ROUND((SUM(order_details.quantity * pizzas.price) / (SELECT
        (SUM(order_details.quantity * pizzas.price)) AS total_sales
    FROM
        order_details
        JOIN
        pizzas ON pizzas.pizza_id = order_details.pizza_id)) * 100,2) AS revenue_percentage
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue_percentage DESC
LIMIT 3
```



ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.



```
select order_date, sum(total_revenue) over (order by order_date) as cum_revenue from
(select orders.order_date,
sum(order_details.quantity * pizzas.price) as total_revenue  from order_details
  join pizzas
    on order_details.pizza_id = pizzas.pizza_id
  join orders
    on orders.order_id = order_details.order_id
 group by orders.order_date) as sales;
```





DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```
select name, revenue from
(select category,name,revenue,rank() over (partition by category order by revenue desc) as rn
from (select pizza_types.category,pizza_types.name,
sum((order_details.quantity)*pizzas.price) as revenue from pizzas

join pizza_types
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn <= 3 ;
```





THANK YOU

FOR ATTENTION

