


1. Identify the basic structure of ASP.NET and Web page model.

❖ Basic structure of ASP.NET


```
using System;  
using System.Collections.Generic;  
using System.Linq;  
using System.Web;  
using System.Web.UI;  
using System.Web.UI.WebControls;
```

```
namespace WebApplication1  
{  
    public partial class Default : System.Web.UI.Page  
    {  
        protected void Page_Load(object sender, EventArgs e)  
        {  
  
        }  
  
        protected void Button1_Click(object sender, EventArgs e)  
        {  
            Label2.Text = "Welcome to ASP.NET Page: " + TextBox1.Text;  
        }  
    }  
}
```

❖ Web page model

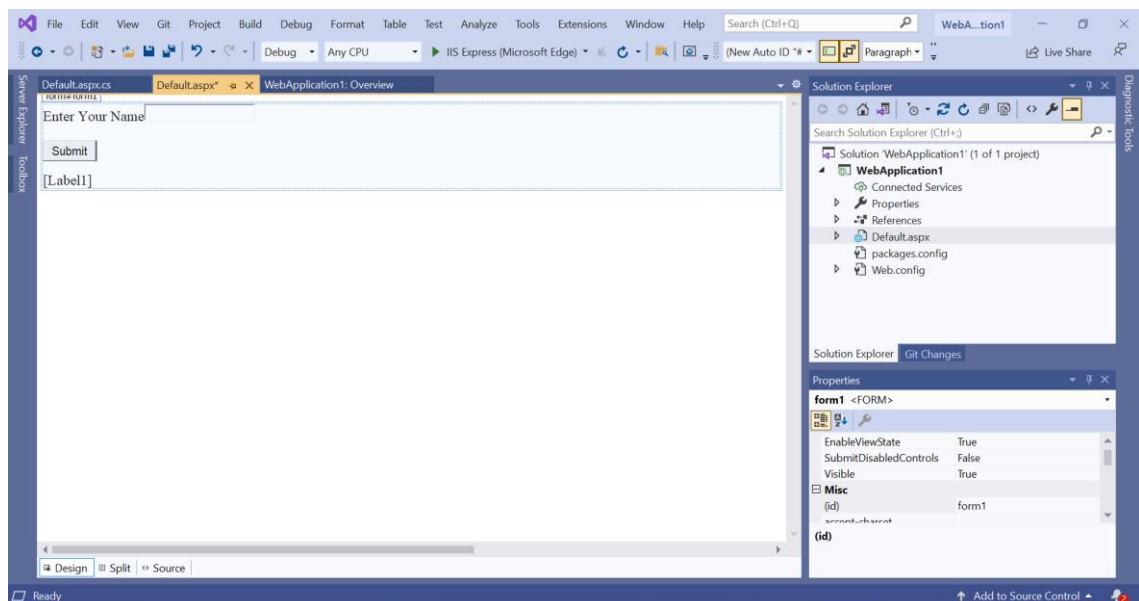

❖ OUTPUT

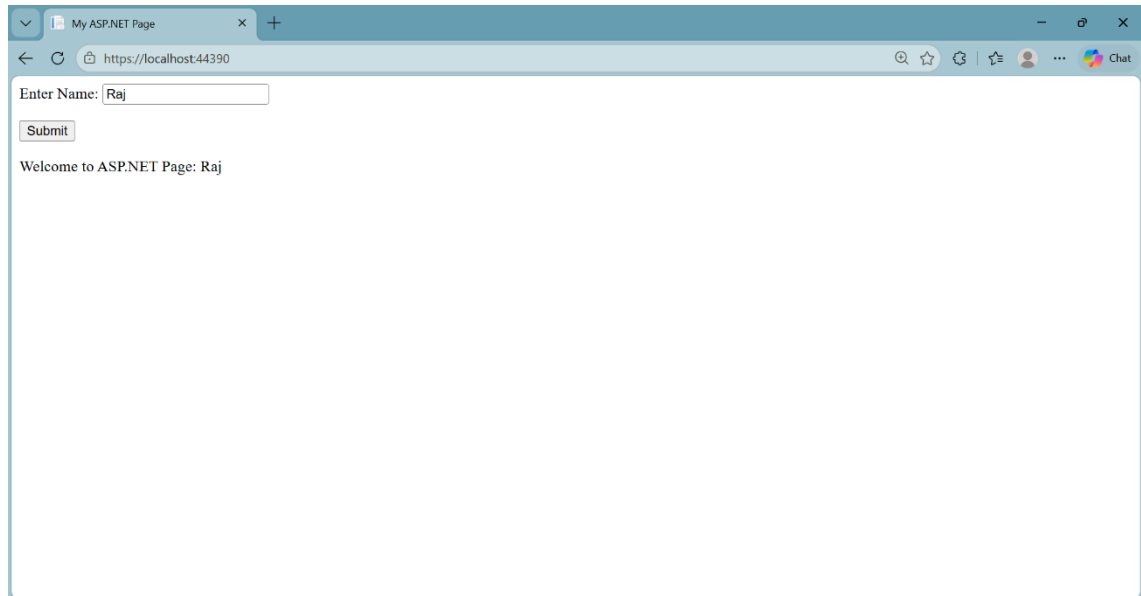

2. Describe the uses of different types of ASP.NET controls.

❖ PROGRAM


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
```

```
namespace WebApplication4
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {


        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            if (Page.IsValid)
            {
                lblResult.Text = "Hello " + txtName.Text;
            }
        }
    }
}
```

❖ DESIGN PAGE

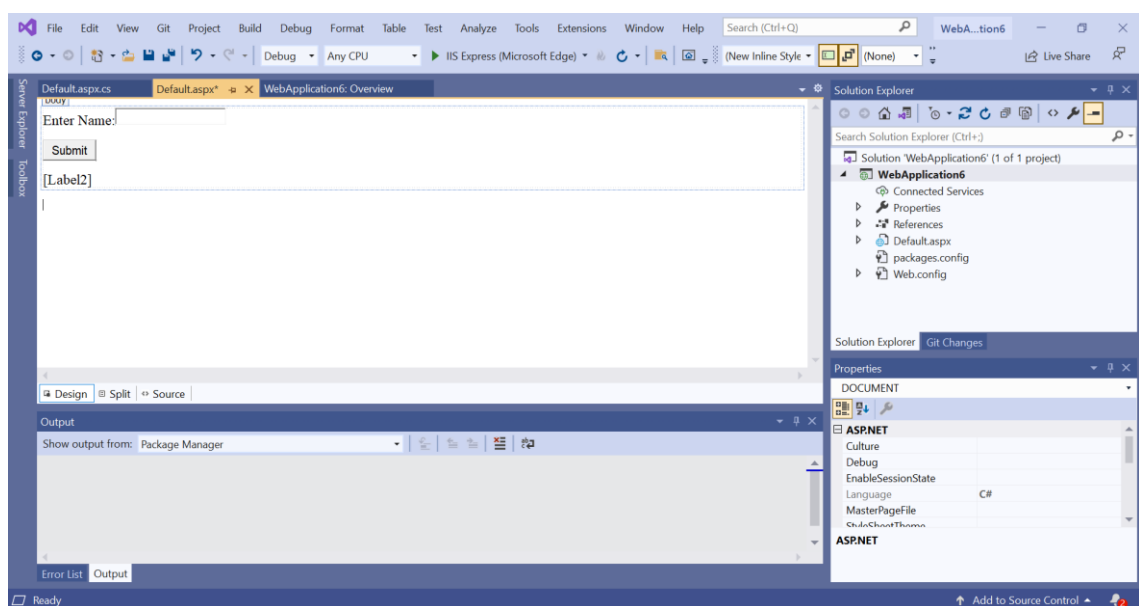

❖ OUTPUT

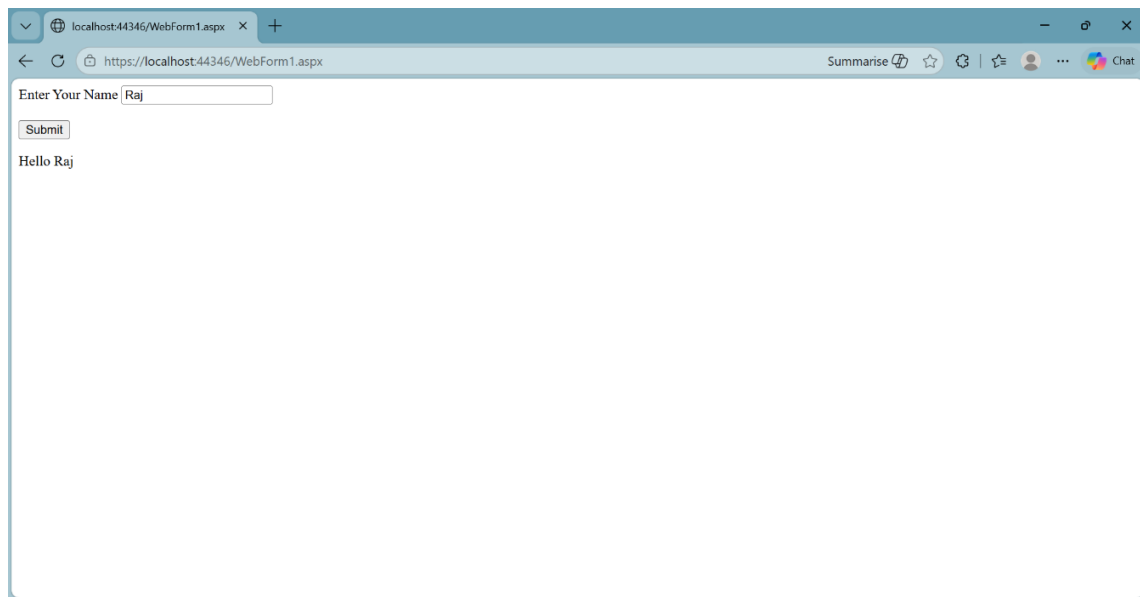

3. Illustrate the different types of intrinsic object and state management techniques.

❖ PROGRAM

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication5
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {


        }

        protected void btnSave_Click(object sender, EventArgs e)
        {
            Session["UserName"] = txtName.Text;


            Response.Write("<br/>Data Stored in Session!");

            lblMessage.Text = "Hello " + Session["UserName"];
        }
    }
}
```

❖ DESIGN PAGE

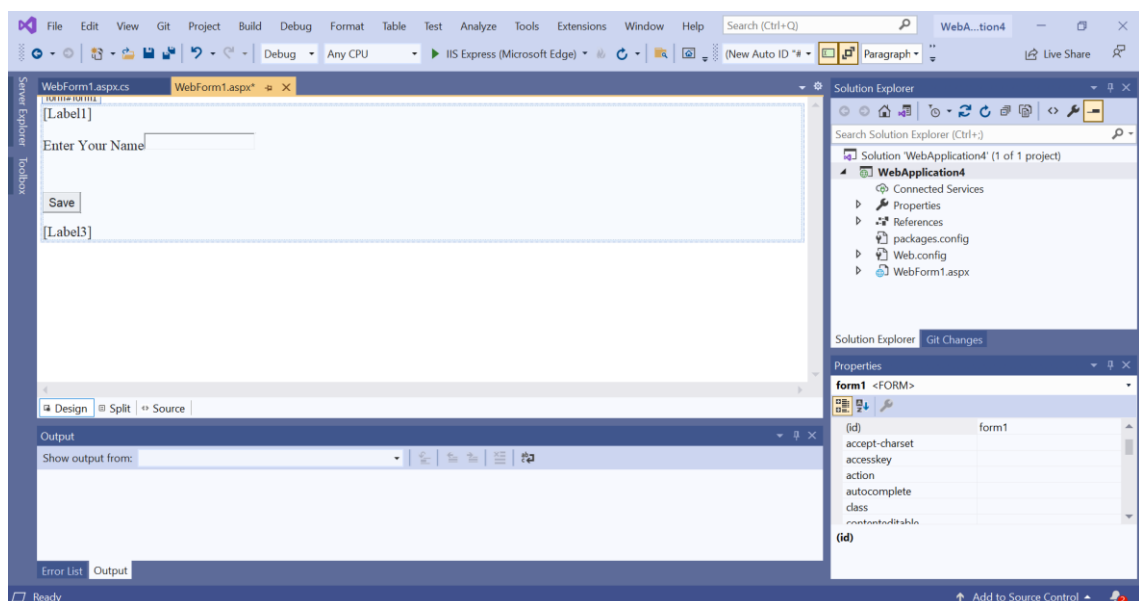

❖ OUTPUT

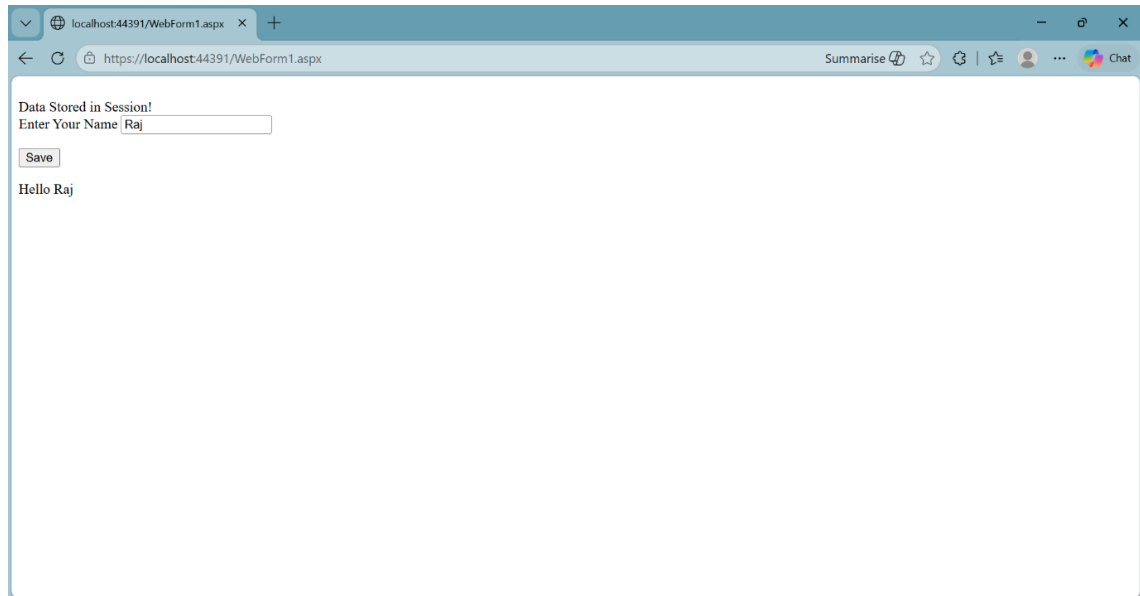

4. Explain the use of web designing controls and ado.net controls.

❖ Web designing controls


❖ PROGRAM

```
using System;  
using System.Collections.Generic;  
using System.Linq;  
using System.Web;  
using System.Web.UI;  
using System.Web.UI.WebControls;
```


```
namespace WebApplication2
```

```
{  
    public partial class WebForm1 : System.Web.UI.Page  
    {  
        protected void Page_Load(object sender, EventArgs e)  
        {  
  
        }  
  
        protected void Button1_Click(object sender, EventArgs e)  
        {  
            string gender = "";  
  
            if (RadioButton1.Checked)  
                gender = "Male";  
            else if (RadioButton2.Checked)  
                gender = "Female";  
  
            Label1.Text = "Hello " + TextBox1.Text + " (" + gender + ")";  
        }  
    }  
}
```

❖ DESIGN PAGE

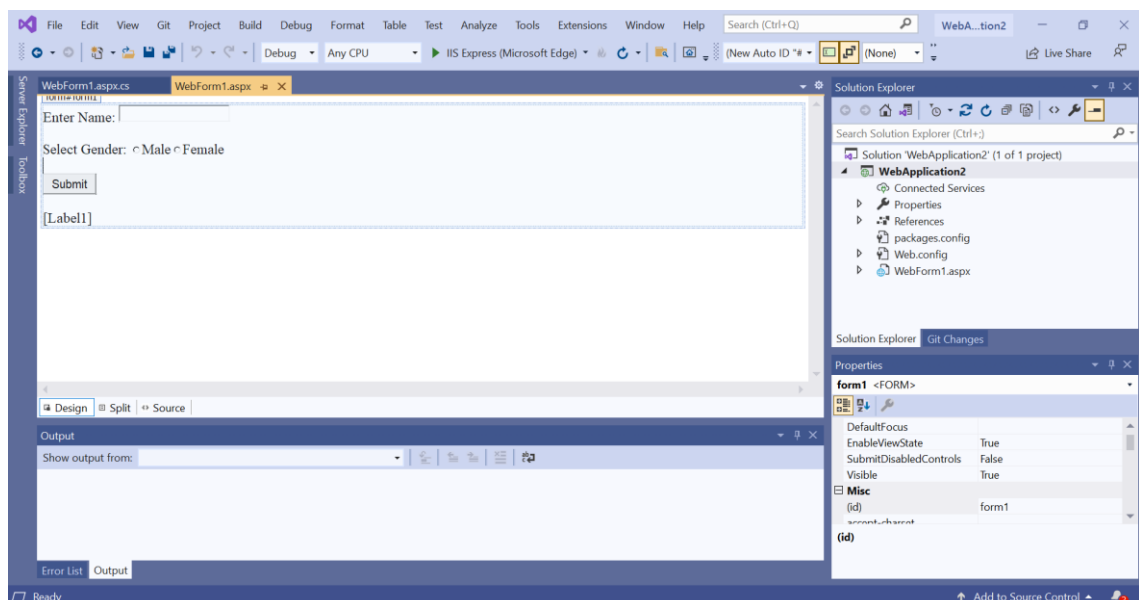

❖ OUTPUT

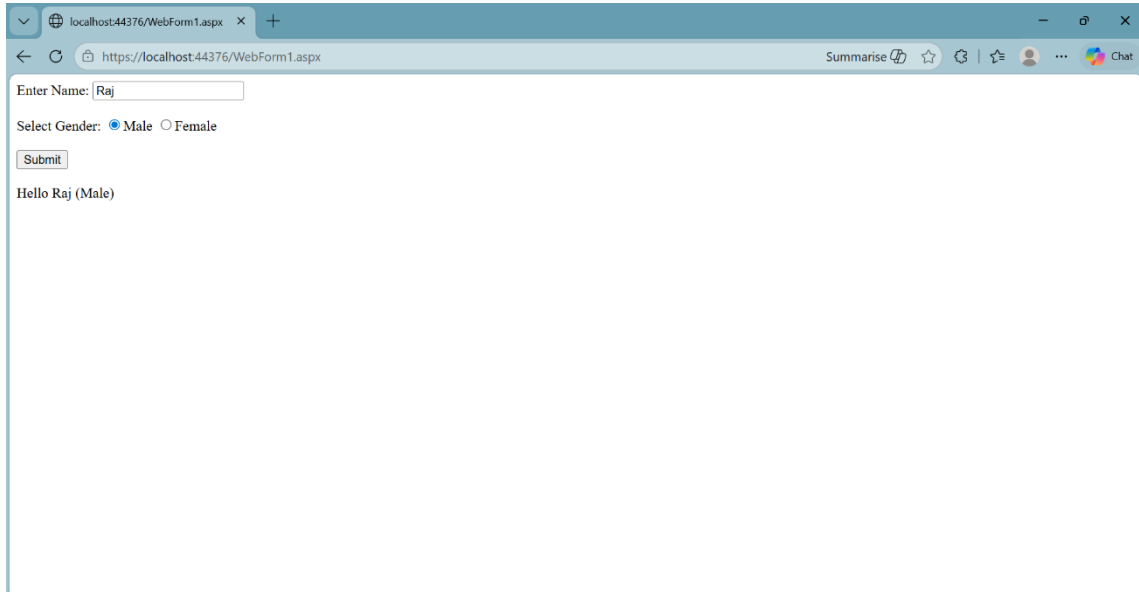

❖ ADO.NET Controls

❖ PROGRAM

○ SQL

```
CREATE TABLE Student(  
    Id INT,  
    Name VARCHAR(50)  
);
```

```
INSERT INTO Student VALUES (1, 'Raj');  
INSERT INTO Student VALUES (2, 'Amit');
```

```
SELECT * FROM Student;
```

○ .aspx.cs

```
using System;  
using System.Data;  
using System.Data.SqlClient;
```

```
namespace WebApplication5  
{  
    public partial class WebForm1 : System.Web.UI.Page  
    {  
        protected void Page_Load(object sender, EventArgs e)  
        {  
            if (!IsPostBack)  
            {  
                LoadData();  
            }  
        }  
    }  
}
```

```

void LoadData()
{
    string connStr = @"Data Source=localhost\SQLEXPRESS;Initial
Catalog=StudentDB;Integrated Security=True";

    SqlConnection con = new SqlConnection(connStr);

    SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Student", con);

    DataTable dt = new DataTable();


    da.Fill(dt);

    GridView1.DataSource = dt;
    GridView1.DataBind();
}

protected void GridView1_SelectedIndexChanged(object sender, EventArgs e)
{
}
}
}


```

❖ DESIGN PAGE

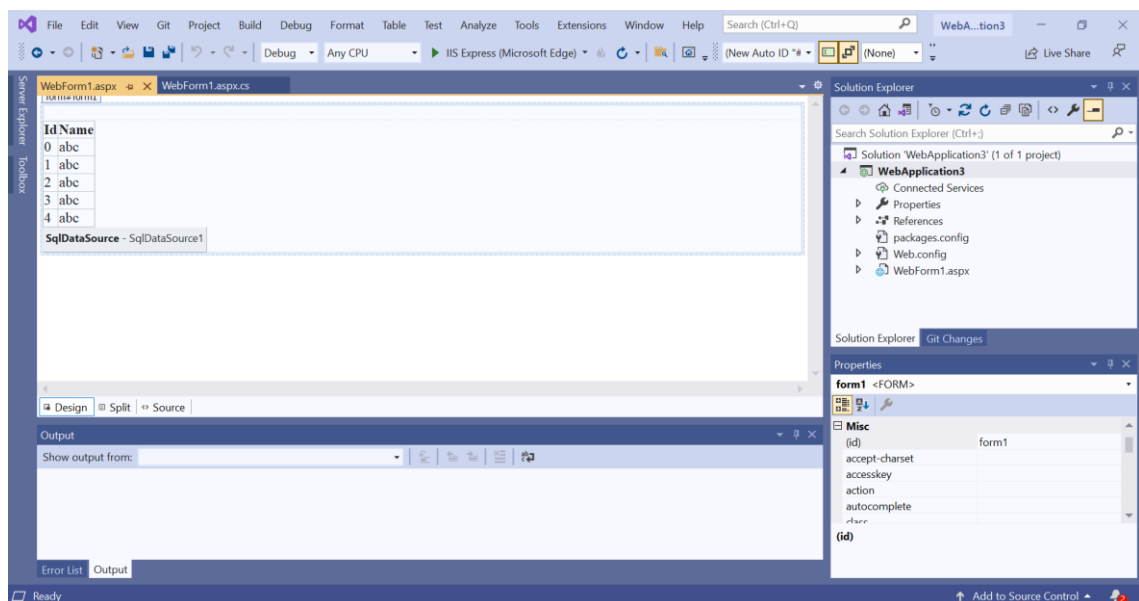


❖ OUTPUT

○ SQL Database

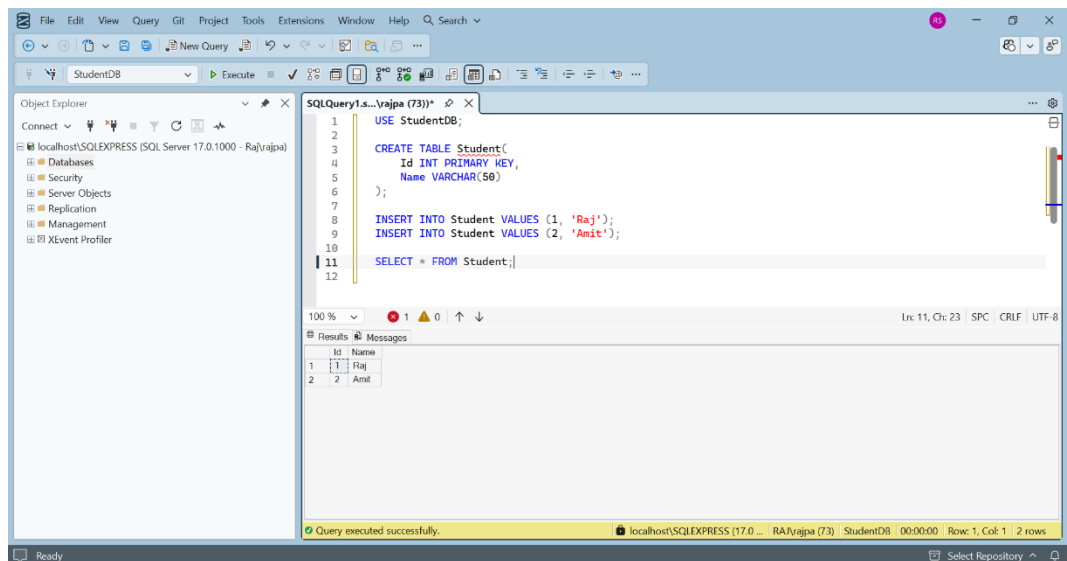

○ Gridview

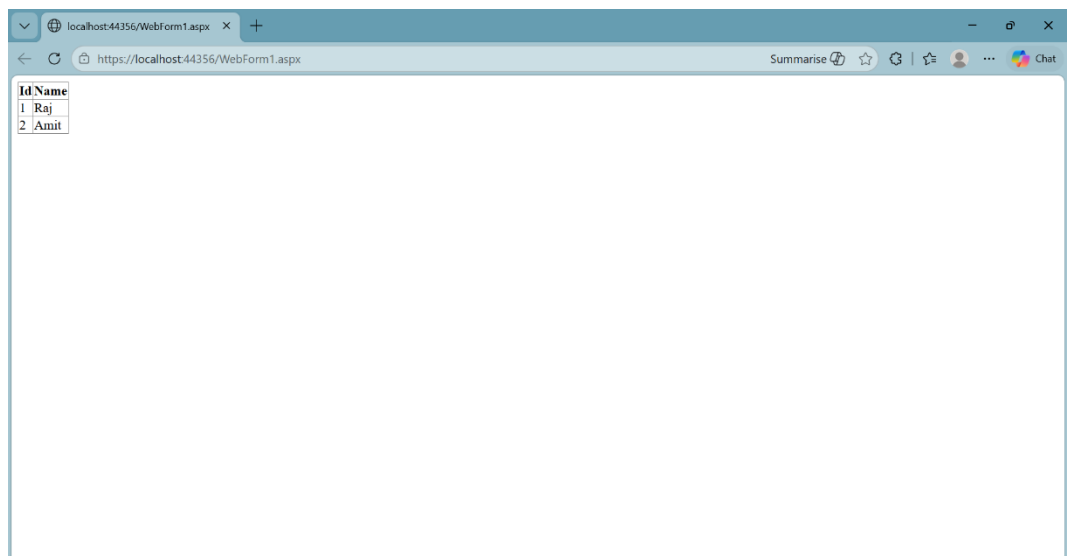

5. Explain the basic security and configuration controls.

❖ **Login.aspx.cs**

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication6
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            if (TextBox1.Text == "admin" && TextBox2.Text == "1234")
            {
                Session["user"] = TextBox1.Text; // store user
                Response.Redirect("Home.aspx");
            }
            else
            {
                Label1.Text = "Invalid Username or Password";
            }
        }
    }
}
```

❖ **Home.aspx.cs**

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication6
{
    public partial class WebForm2 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (Session["user"] == null)
            {

```

```

        Response.Redirect("Login.aspx");
    }
}

protected void Button1_Click(object sender, EventArgs e)
{
    Session.Abandon();
    Response.Redirect("Login.aspx");
}
}
}

```


❖ Web.config

```

<?xml version="1.0" encoding="utf-8" ?>
<configuration>
    <system.web>
        <authentication mode="Forms"/>
        <authorization>
            <deny users="?" />
        </authorization>
        <sessionState timeout="20"/>
        <customErrors mode="On"/>
    </system.web>
</configuration>

```

❖ DESIGN PAGE

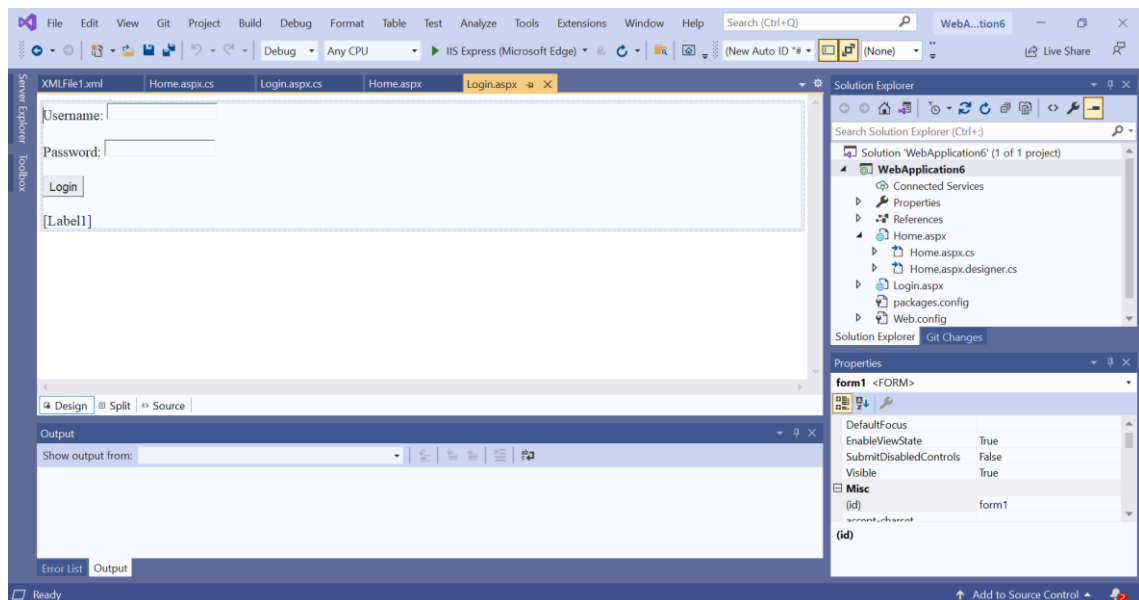

❖ OUTPUT

localhost:44309/Login.aspx

Summarise Find Star Refresh Home User Chat

Username: admin

Password: [masked]

Login

localhost:44309/Login.aspx

Summarise Find Star Refresh Home User Chat

Username: admin

Password:

Login

Invalid Username or Password

localhost:44309/Home.aspx

Summarise Find Star Refresh Home User Chat

Welcome to Secure Page

Logout

6. Write an ASP.NET program that demonstrates use view state, session state, and application state.

❖ StateDemo.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication7
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            ViewState["name"] = TextBox1.Text;

            Session["name"] = TextBox1.Text;


            Application["name"] = TextBox1.Text;

            Label1.Text = "Data Saved!";
        }



        protected void Button2_Click(object sender, EventArgs e)
        {
            string vs = ViewState["name"] != null ? ViewState["name"].ToString() : "Empty";
            string ss = Session["name"] != null ? Session["name"].ToString() : "Empty";
            string app = Application["name"] != null ? Application["name"].ToString() :
"Empty";

            Label1.Text = "ViewState: " + vs + "<br/>" +
                "Session: " + ss + "<br/>" +
                "Application: " + app;
        }
    }
}
```

❖ DESIGN PAGE

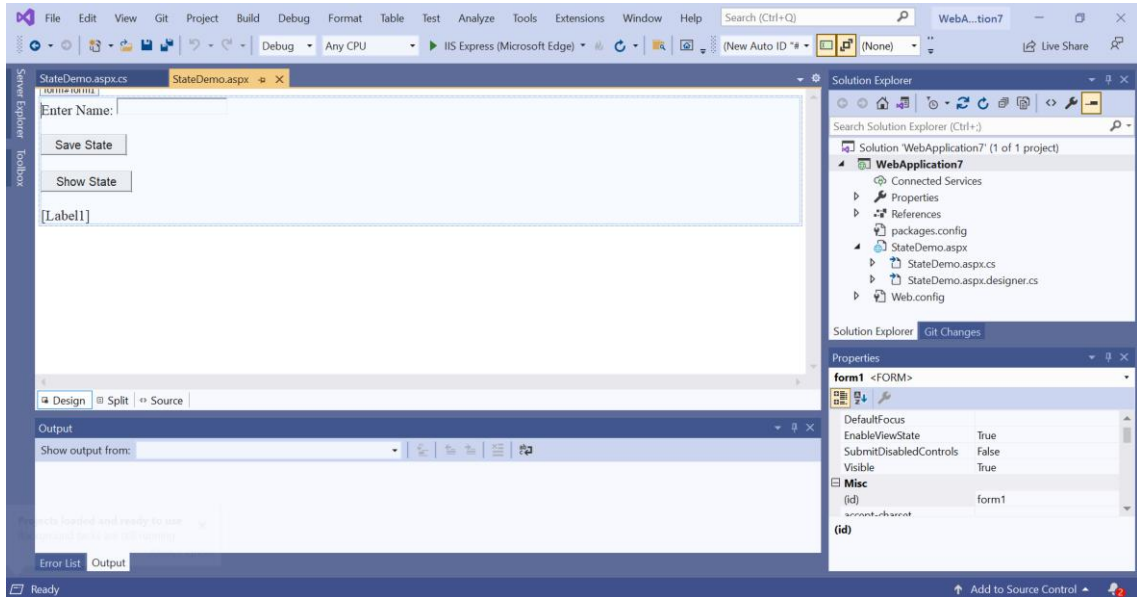

❖ OUTPUT

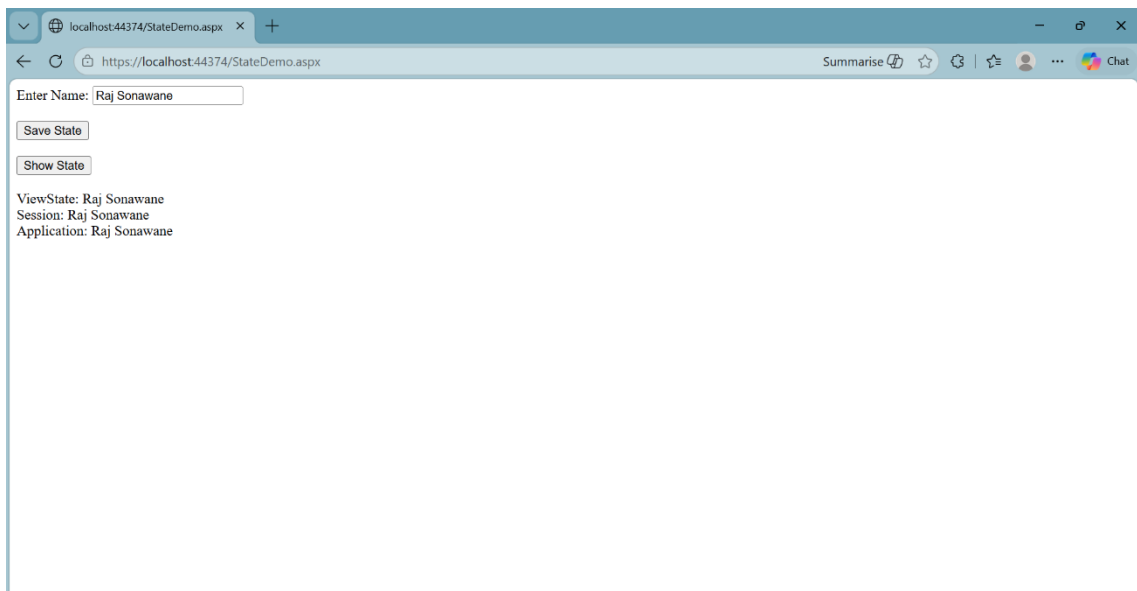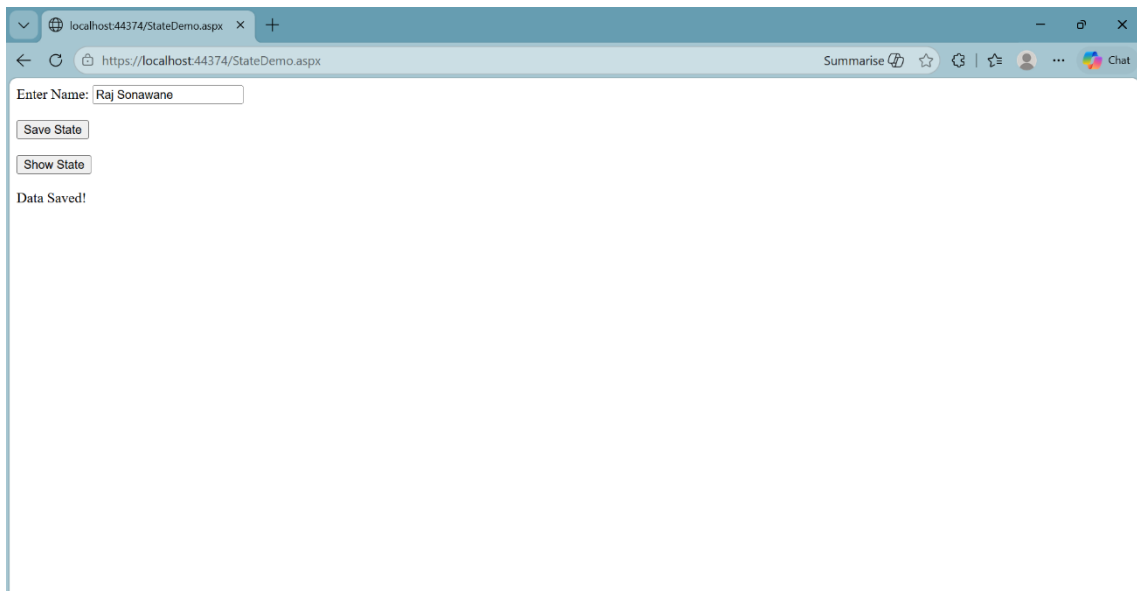

7. Write an ASP.NET program that demonstrates use of Master Page.

❖ Site.master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeBehind="Site.Master.cs"
Inherits="WebApplication8.Site1" %>

<!DOCTYPE html>

<html>
<head runat="server">
  <title>My Website</title>
  <asp:ContentPlaceHolder ID="head" runat="server">
  </asp:ContentPlaceHolder>
</head>
<body>
  <form id="form1" runat="server">

    <h1 style="background-color:lightblue;">My Website Header</h1>

    <a href="Home.aspx">Home</a> |
    <a href="About.aspx">About</a>
    <hr />

    <asp:ContentPlaceHolder ID="ContentPlaceHolder1" runat="server" />

    <hr />
    <h3 style="background-color:lightgray;">Footer Section</h3>

  </form>
</body>
</html>
```

❖ Home.aspx

```
<%@ Page Language="C#" MasterPageFile="~/Site.master" AutoEventWireup="true"
CodeFile="Home.aspx.cs" Inherits="WebApplication8.WebForm1" %>

<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1"
runat="server">

  <h2>Welcome to Home Page</h2>
  <p>This is Home content.</p>

</asp:Content>
```

❖ About.aspx

```
<%@ Page Title="About" Language="C#" MasterPageFile="~/Site.master"
AutoEventWireup="true" CodeFile="About.aspx.cs"
Inherits="WebApplication8.WebForm1" %>
```


```
<asp:Content ID="Content1" ContentPlaceHolderID="ContentPlaceHolder1"
runat="server">
```

```
<h2>About Us</h2>
```


```
<p>This is About page.</p>
```

```
</asp:Content>
```

❖ DESIGN PAGE

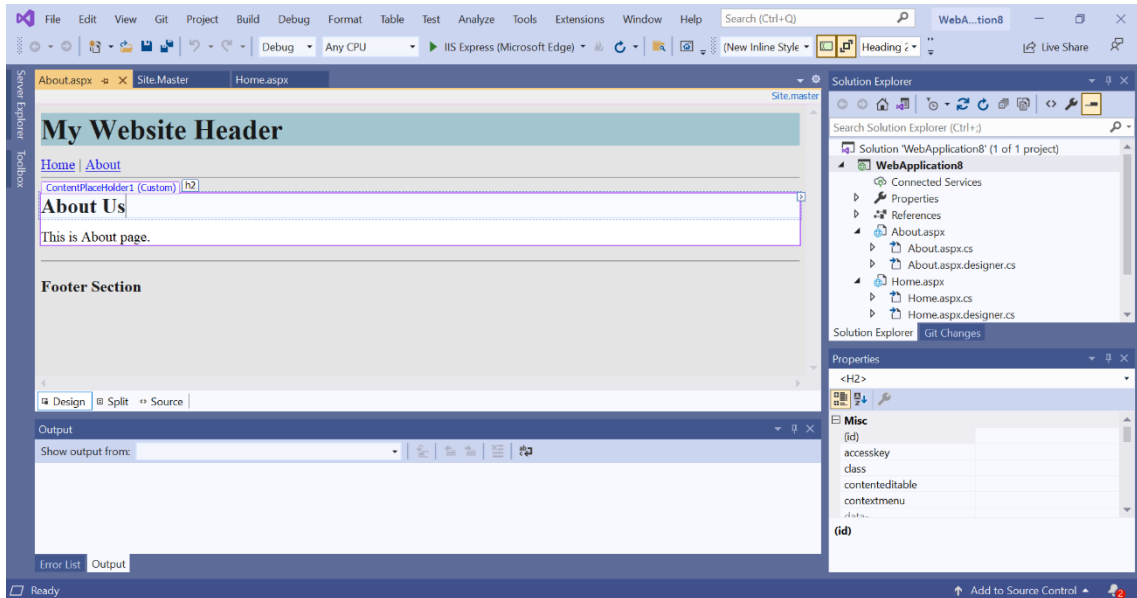

❖ OUTPUT

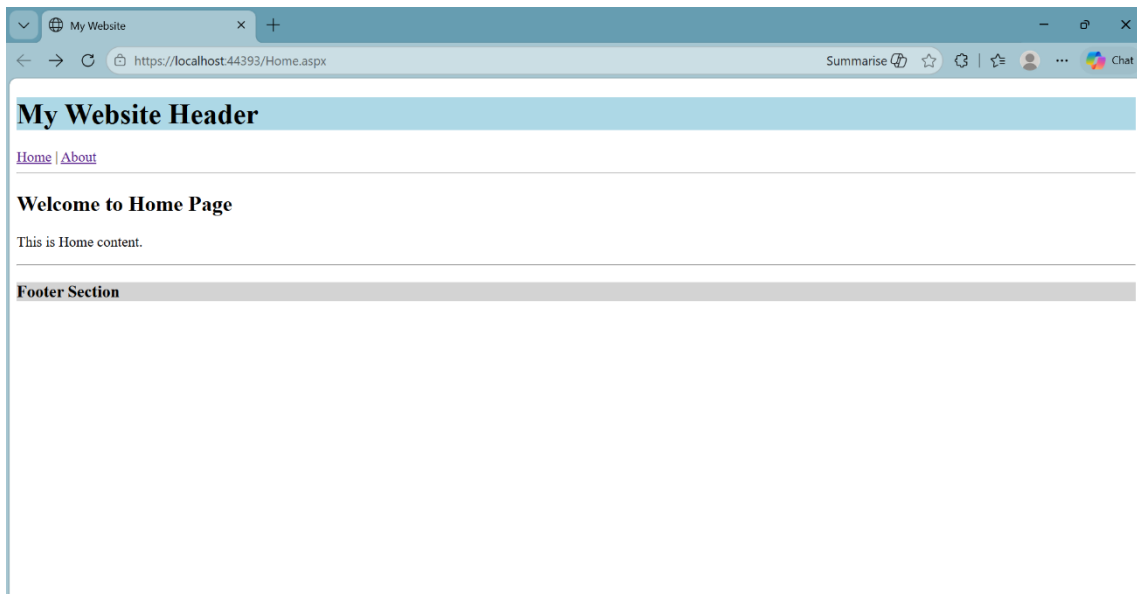

8. Create a student registration form by using ASP.NET basic server controls.

❖ PROGRAM

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication9
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            string name = TextBox1.Text;


            string gender = "";
            if (RadioButton1.Checked)
                gender = "Male";
            else if (RadioButton2.Checked)
                gender = "Female";

            string course = DropDownList1.SelectedItem.Text;


            string hobbies = "";
            if (CheckBox1.Checked)
                hobbies += "Reading ";
            if (CheckBox2.Checked)
                hobbies += "Sports ";
            if (CheckBox3.Checked)
                hobbies += "Music ";

            Label1.Text = "Name: " + name + "<br/>" +
                "Gender: " + gender + "<br/>" +
                "Course: " + course + "<br/>" +
                "Hobbies: " + hobbies;
        }
    }
}
```

❖ DESIGN PAGE

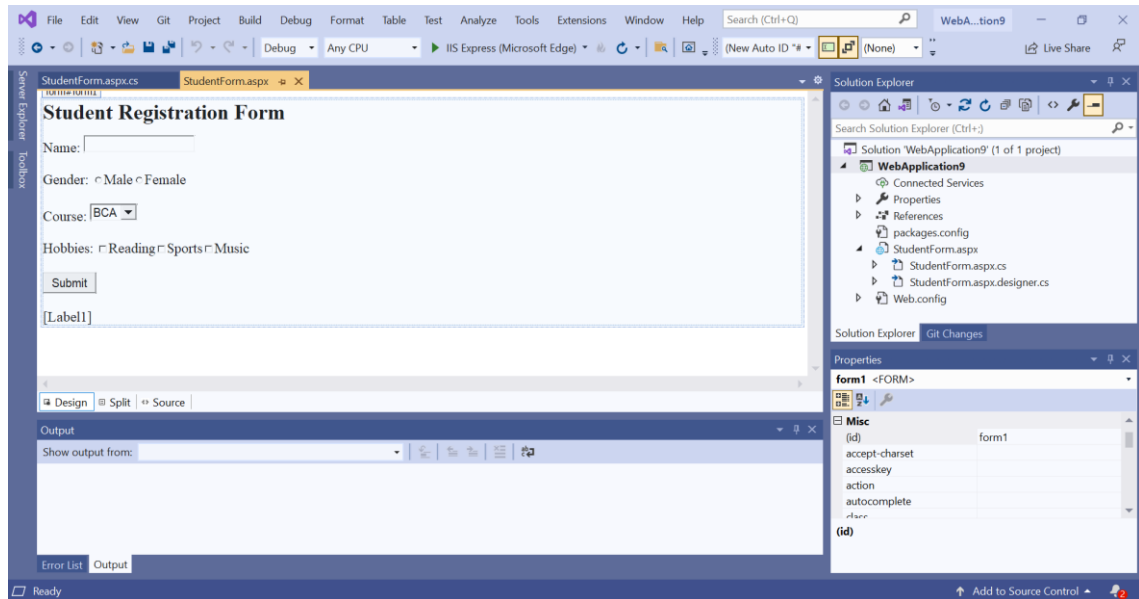

❖ OUTPUT

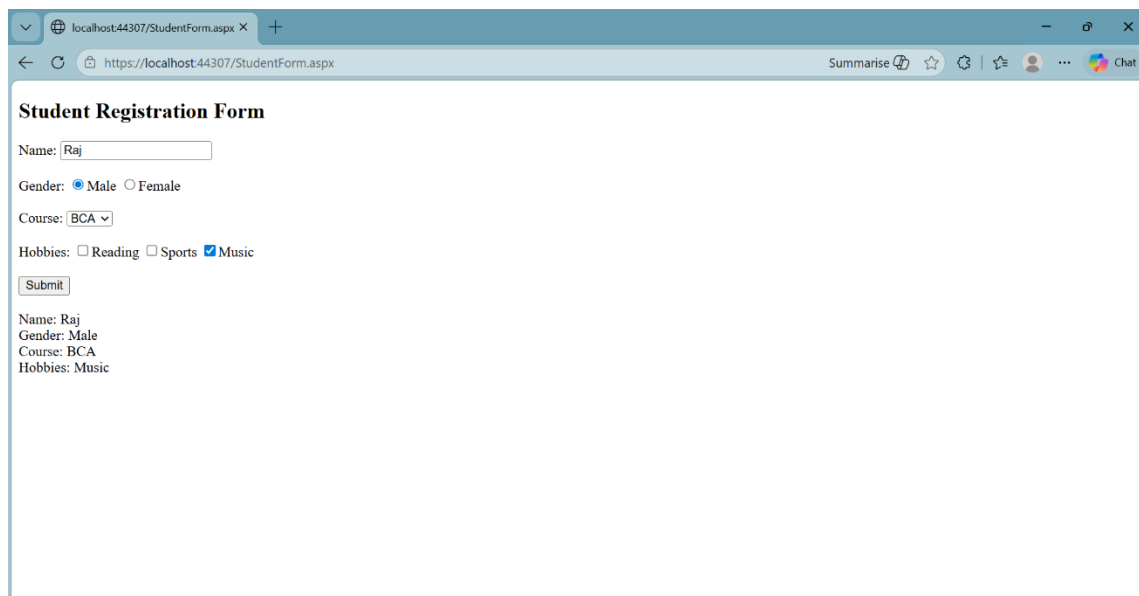

9. Write an ASP.NET program that demonstrates use of Intrinsic Objects.

❖ PROGRAM

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication10
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            string name = Request.Form[TextBox1.UniqueID];


            Session["username"] = name;

            Application["username"] = name;


            Response.Write("Hello " + name + "<br/>");

            string safe = Server.HtmlEncode(name);
            Label1.Text = "Encoded Name: " + safe;
        }
    }
}
```

❖ DESIGN PAGE

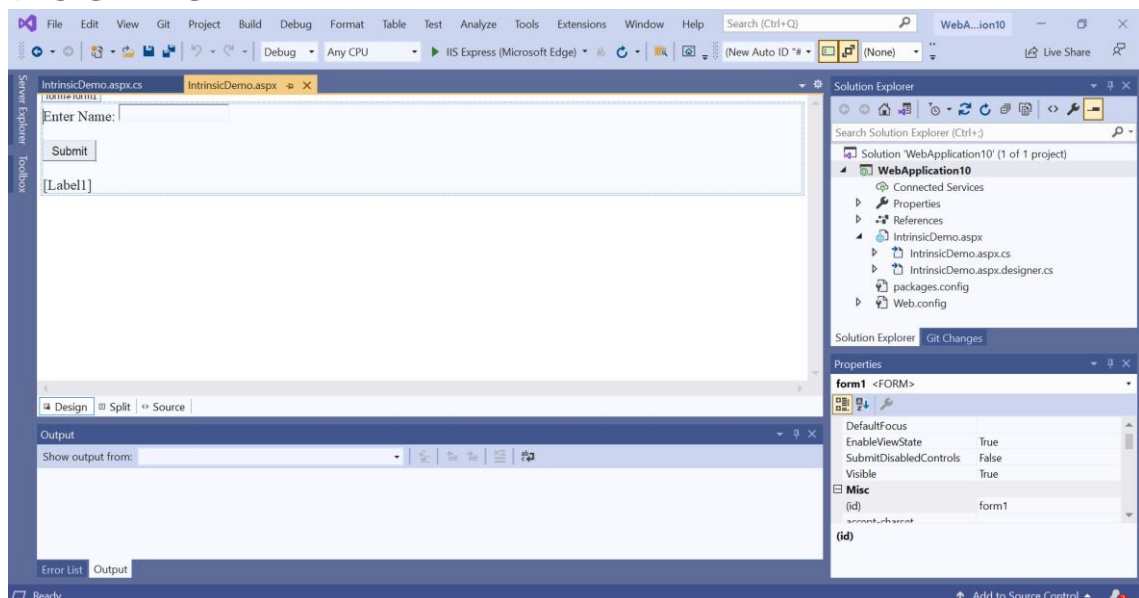

❖ OUTPUT

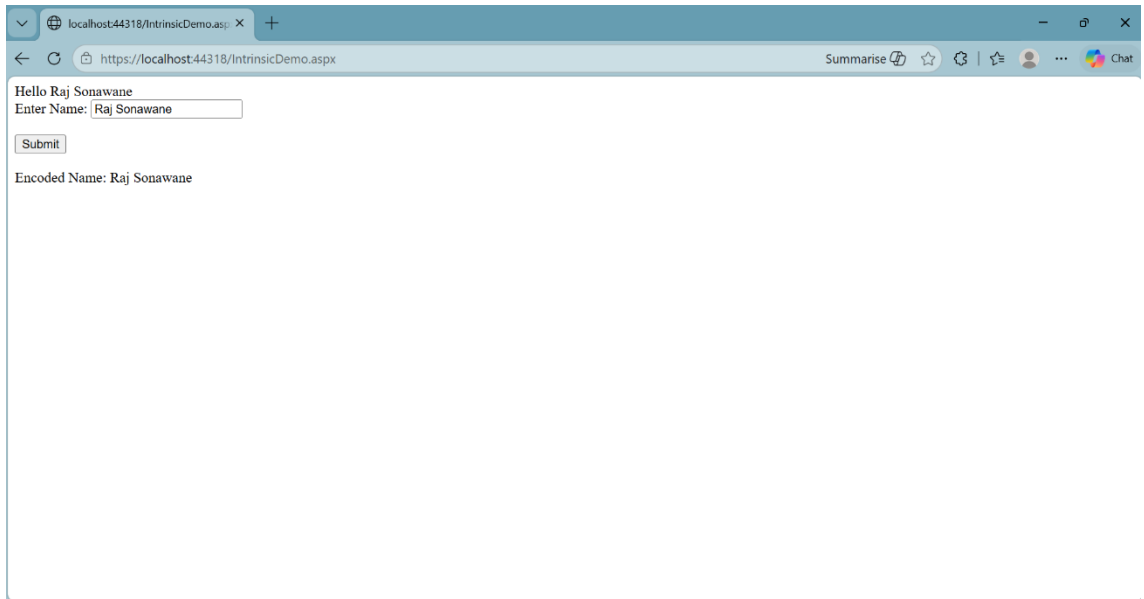

10. Write an ASP.NET program to demonstrate Calendar control.

❖ PROGRAM


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication11
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Calendar1_SelectionChanged(object sender, EventArgs e)
        {
            Label1.Text = "Selected Date: " + Calendar1.SelectedDate.ToString("dd/MM/yyyy");
        }
    }
}
```

❖ DESIGN PAGE

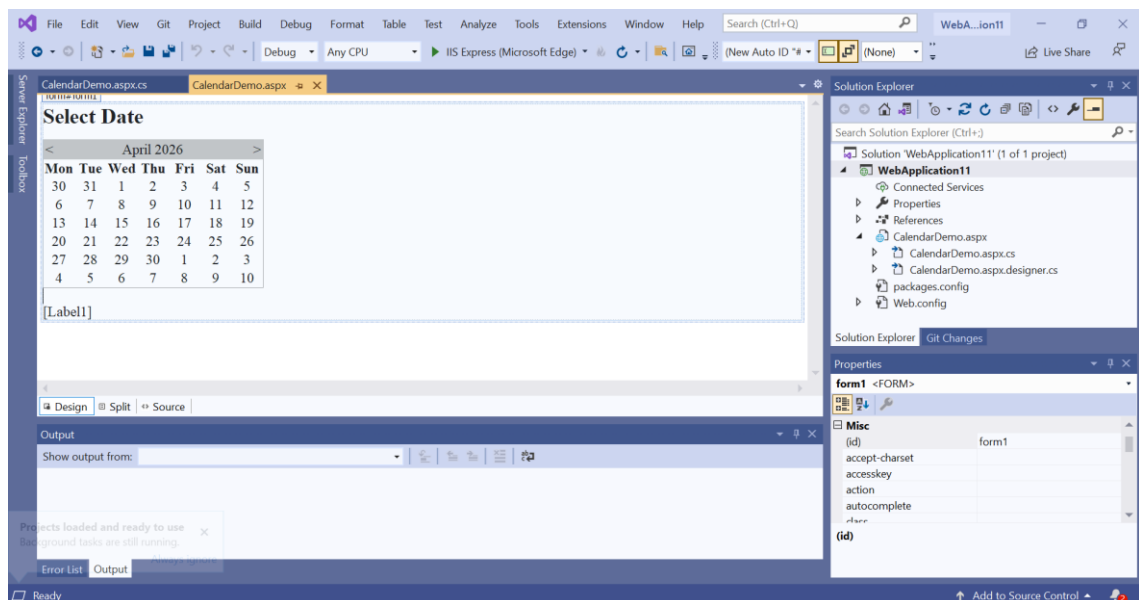

❖ OUTPUT

localhost:44338/CalendarDemo.as: X

https://localhost:44338/CalendarDemo.aspx

Summarise | | | | Chat

Select Date

≤

May 2026

≥

Mon	Tue	Wed	Thu	Fri	Sat	Sun
27	28	29	30	1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31
1	2	3	4	5	6	7

Selected Date: 20-05-2026

11. Write an ASP.NET program to demonstrate AdRotator control.

❖ AdDemo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="AdDemo.aspx.cs"
Inherits="WebApplication12.WebForm1" %>
```

```
<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
<title></title>
```

```
</head>
```

```
<body>
```

```
<form id="form1" runat="server">
```

```
<h2>Advertisement</h2>
```

```
<asp:AdRotator ID="AdRotator1" runat="server"
```

```
AdvertisementFile="Ads.xml">
```

```
</asp:AdRotator>
```

```
</form>
```

```
</body>
```

```
</html>
```

❖ Ads.xml

```
<?xml version="1.0" encoding="utf-8" ?>
```

```
<Advertisements>
```

```
<Ad>
```

```
<ImageUrl>Images/ad1.jpg</ImageUrl>
```

```
<NavigateUrl>https://www.google.com</NavigateUrl>
```

```
<AlternateText>Google Ad</AlternateText>
```

```
</Ad>
```

```
<Ad>
```

```
<ImageUrl>Images/ad2.jpg</ImageUrl>
```

```
<NavigateUrl>https://www.microsoft.com</NavigateUrl>
```

```
<AlternateText>Microsoft Ad</AlternateText>
```

```
</Ad>
```

```
<Ad>
```

```
<ImageUrl>Images/ad3.jpg</ImageUrl>
```


```
<NavigateUrl>https://www.amazon.in</NavigateUrl>
```

```
<AlternateText>Amazon Ad</AlternateText>
```



```
</Ad>
```


```
</Advertisements>
```

❖ DESIGN PAGE

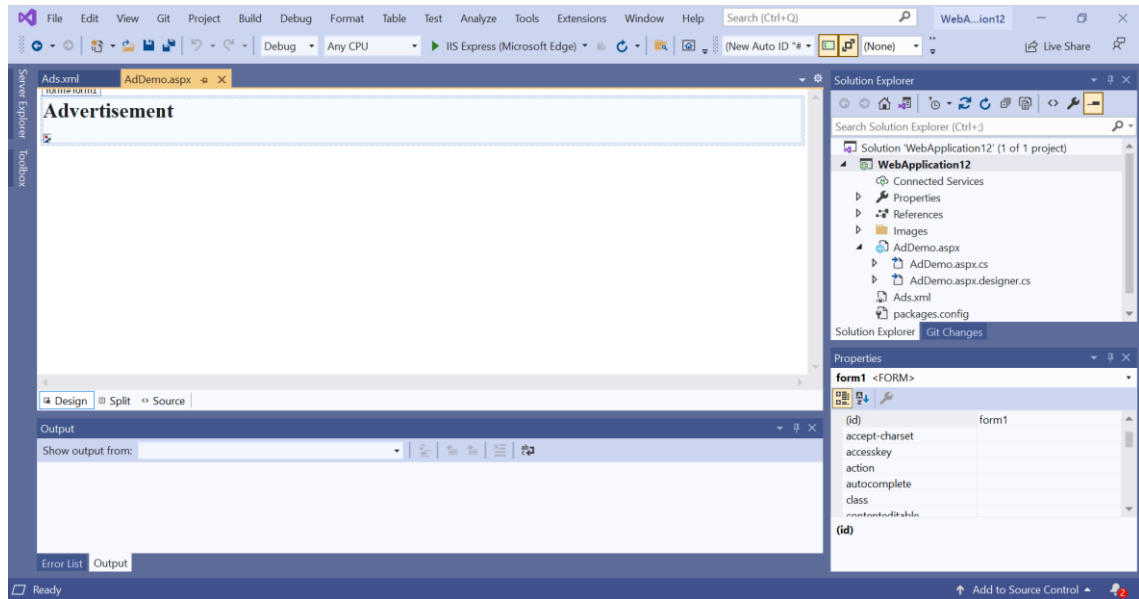

❖ OUTPUT

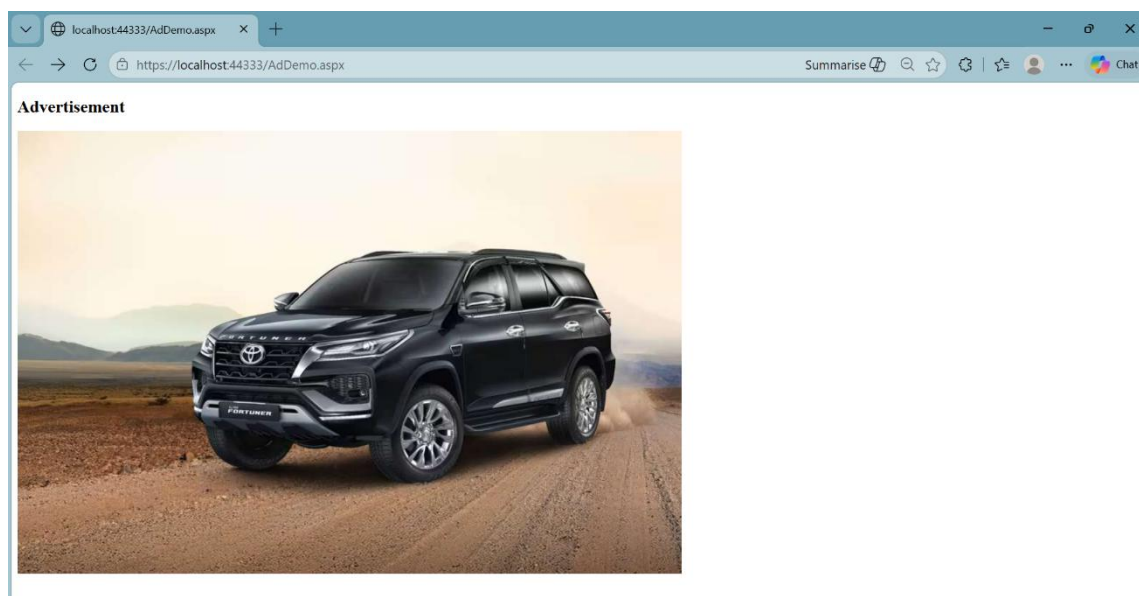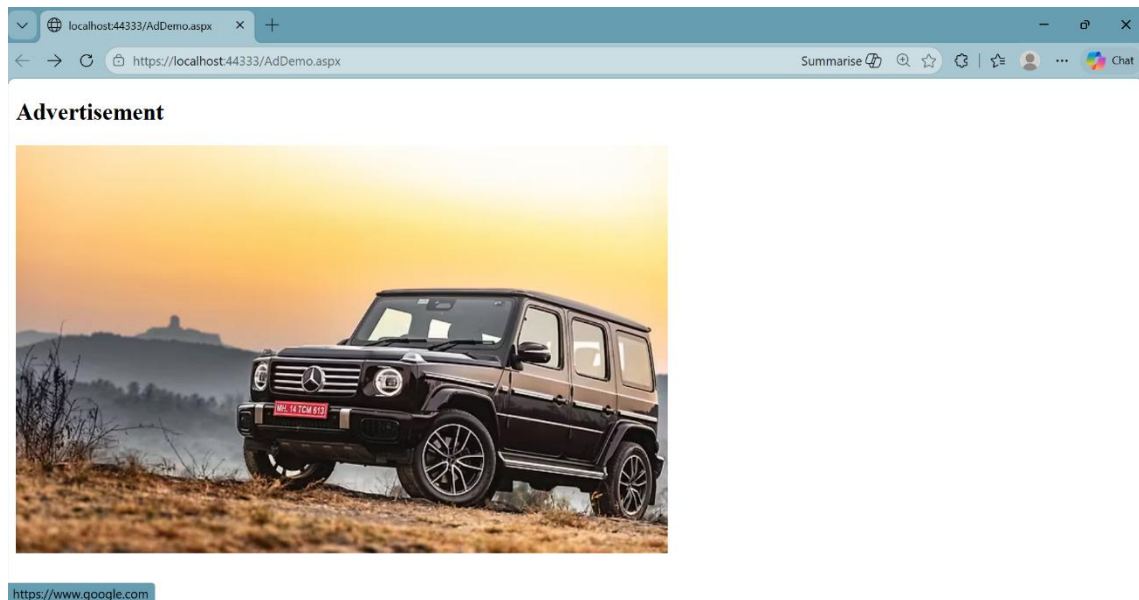

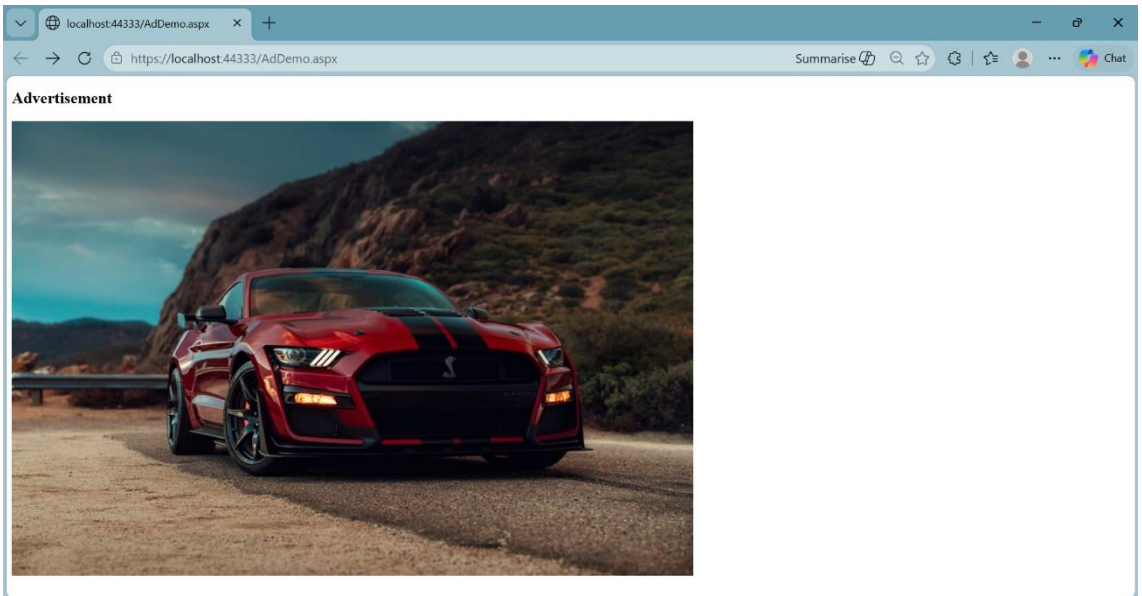

12. Write an ASP.NET program to demonstrate cookies.

❖ PROGRAM

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication13
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            HttpCookie cookie = new HttpCookie("username");
            cookie.Value = TextBox1.Text;


            cookie.Expires = DateTime.Now.AddDays(1);

            Response.Cookies.Add(cookie);



            Label1.Text = "Cookie Saved!";
        }

        protected void Button2_Click(object sender, EventArgs e)
        {
            if (Request.Cookies["username"] != null)
            {
                string name = Request.Cookies["username"].Value;
                Label1.Text = "Welcome " + name;
            }
            else
            {
                Label1.Text = "No Cookie Found";
            }
        }
    }
}
```

❖ DESIGN PAGE

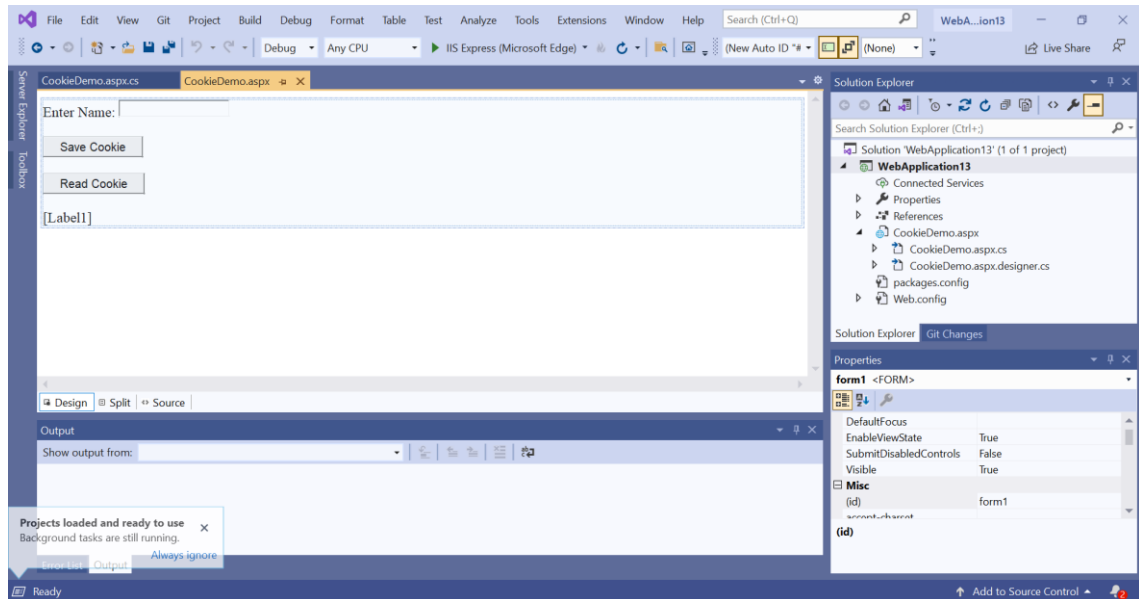

❖ OUTPUT

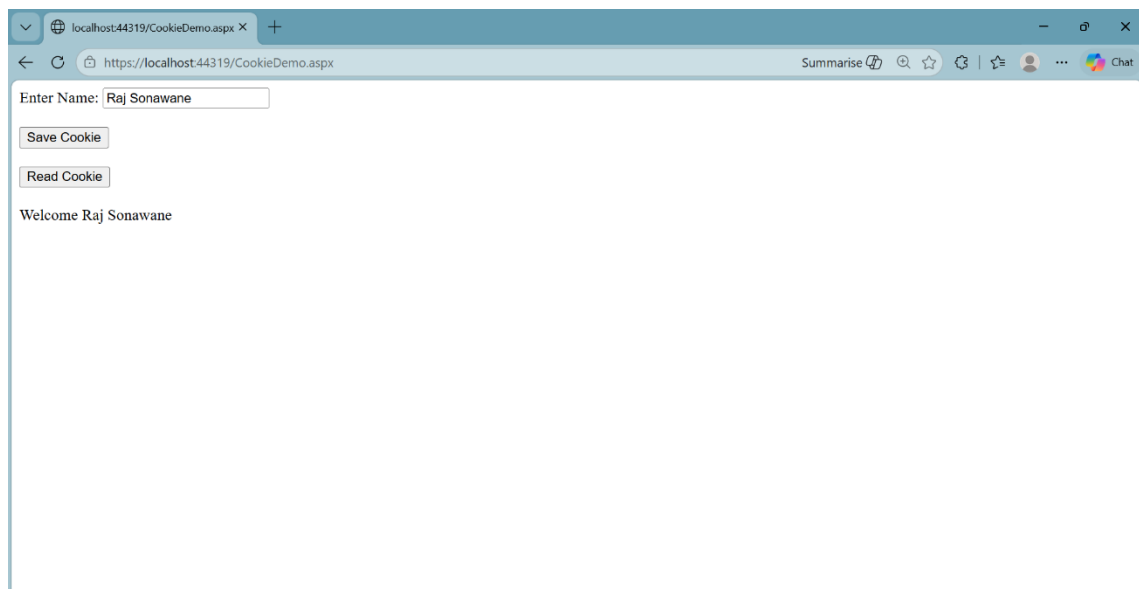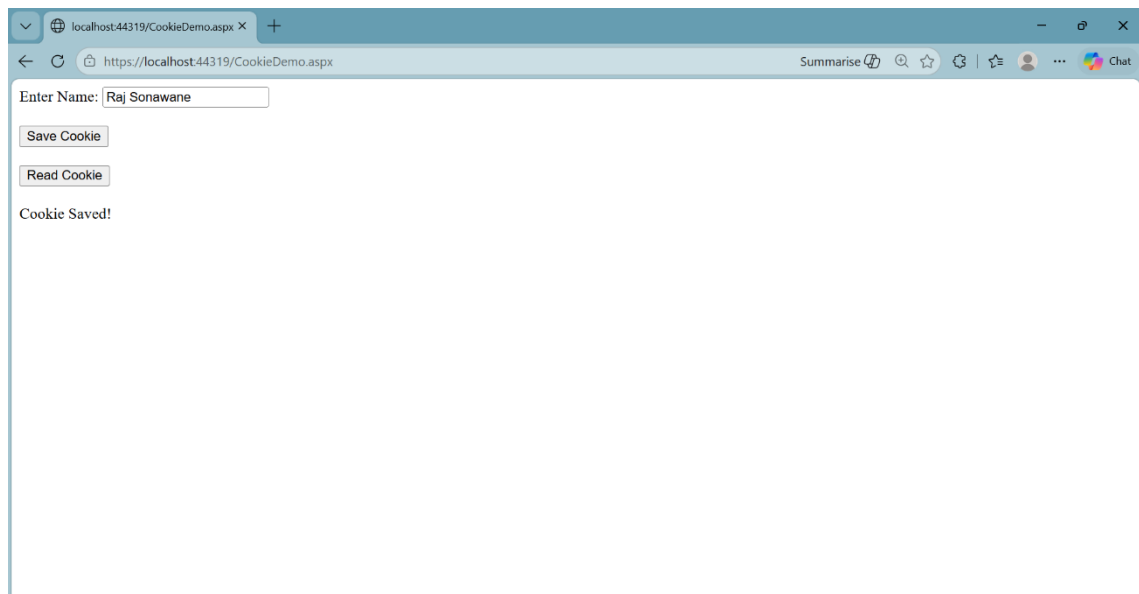

13. Create a student registration form and apply all validation control.

❖ PROGRAM


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication16
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {


        }

        protected void btnSubmit_Click(object sender, EventArgs e)
        {
            if (Page.IsValid)
            {
                Response.Write("Registration Successful!");
            }
        }
    }
}
```

❖ DESIGN PAGE

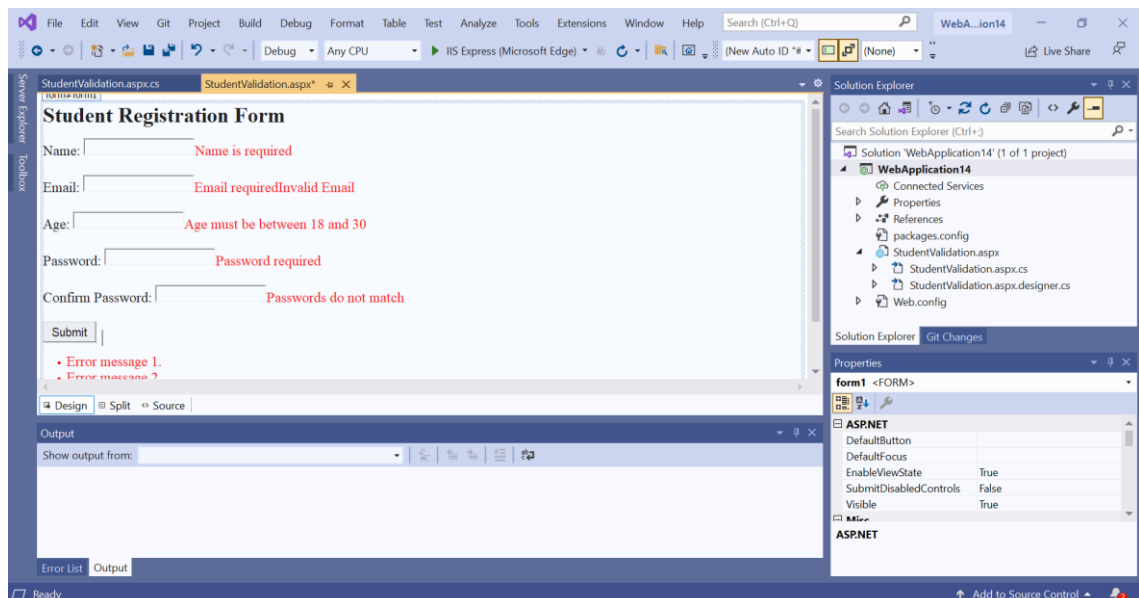

❖ OUTPUT

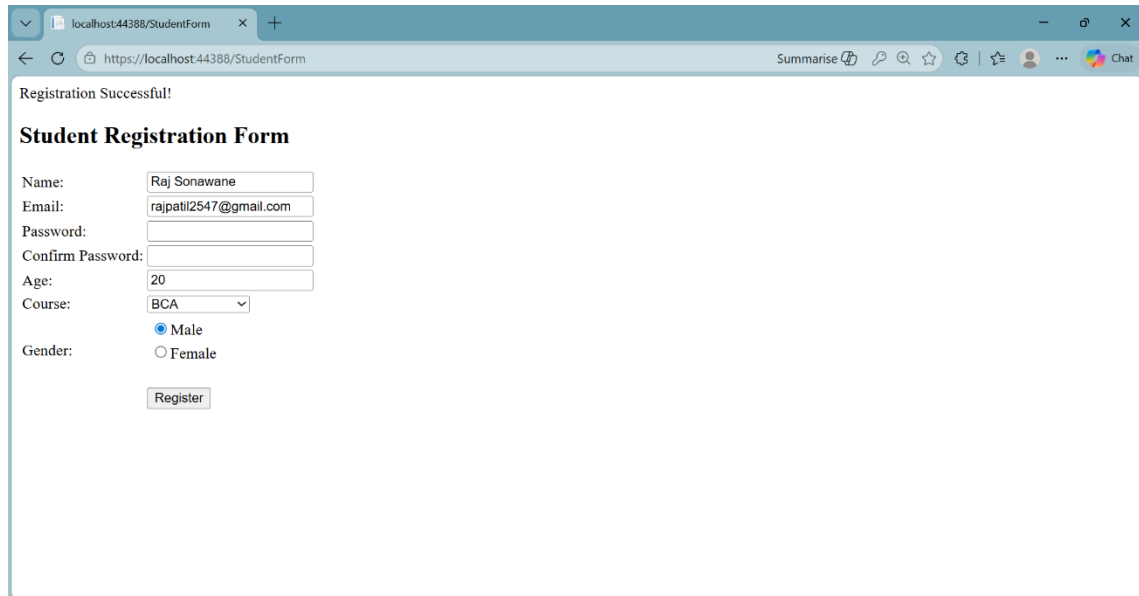

The screenshot shows a web browser window with the address bar displaying "https://localhost:44388/StudentForm". The page content includes a success message "Registration Successful!" and a form titled "Student Registration Form". The form fields are as follows:

- Name:
- Email:
- Password:
- Confirm Password:
- Age:
- Course:
- Gender: ☒ Male ☐ Female

A "Register" button is located at the bottom of the form.


14. Create a simple webpage for G H Raisoni college that display college information using various control.

❖ PROGRAM


```
using System;  
using System.Collections.Generic;  
using System.Linq;  
using System.Web;  
using System.Web.UI;  
using System.Web.UI.WebControls;
```

```
namespace WebApplication17  
{  
    public partial class WebForm1 : System.Web.UI.Page  
    {  
        protected void Page_Load(object sender, EventArgs e)  
        {  
  
        }  
  
        protected void btnShow_Click(object sender, EventArgs e)  
        {  
            lblResult.Text = "You selected: " + ddlDept.SelectedItem.Text;  
        }  
    }  
}
```

❖ DESIGN PAGE

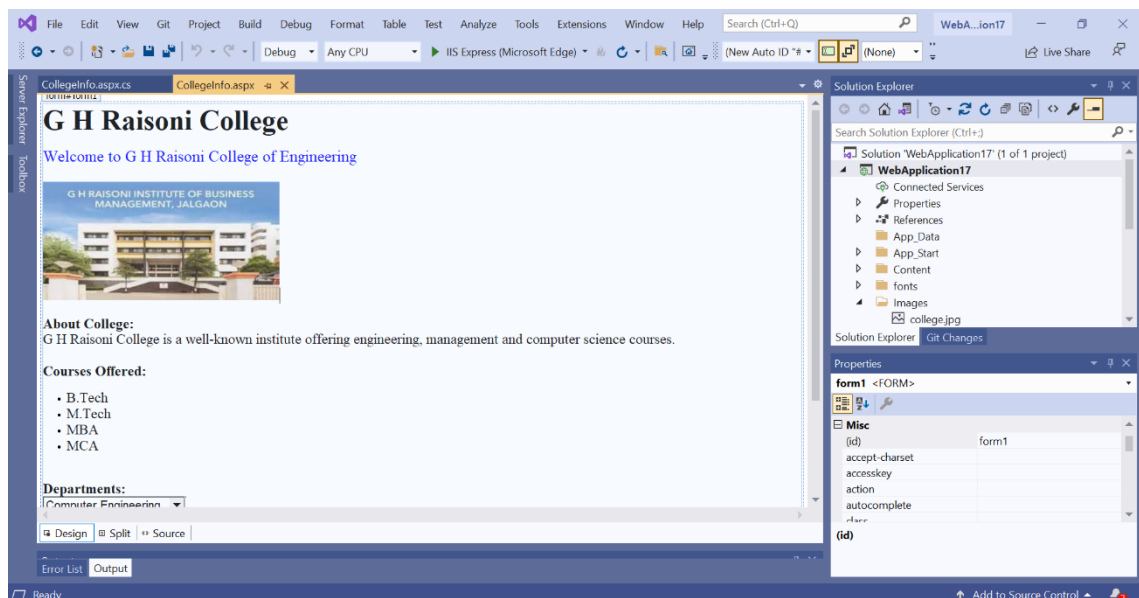

❖ OUTPUT

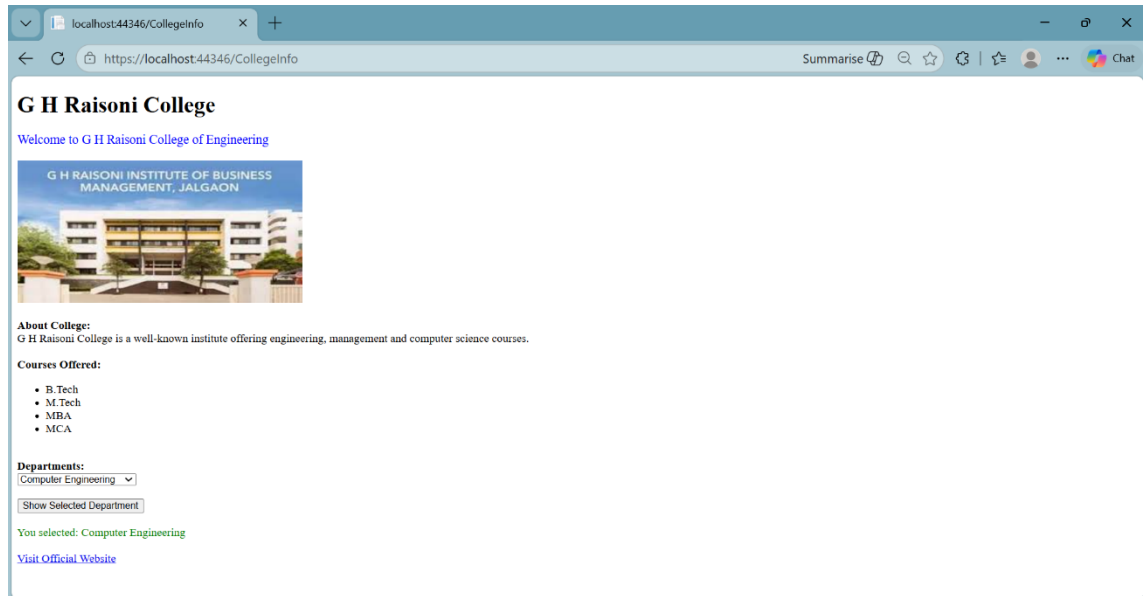

15.Demonstrate the use of Checkbox and Radio button.

❖ Program

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication18
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void btnSubmit_Click(object sender, EventArgs e)
        {
            string hobbies = "Hobbies: ";

            if (chkReading.Checked)
                hobbies += "Reading ";

            if (chkSports.Checked)
                hobbies += "Sports ";


            if (chkMusic.Checked)
                hobbies += "Music ";

            string gender = "";


            if (rbMale.Checked)
                gender = "Male";
            else if (rbFemale.Checked)
                gender = "Female";

            lblResult.Text = hobbies + "<br/> Gender: " + gender;
        }
    }
}
```

❖ DESIGN PAGE

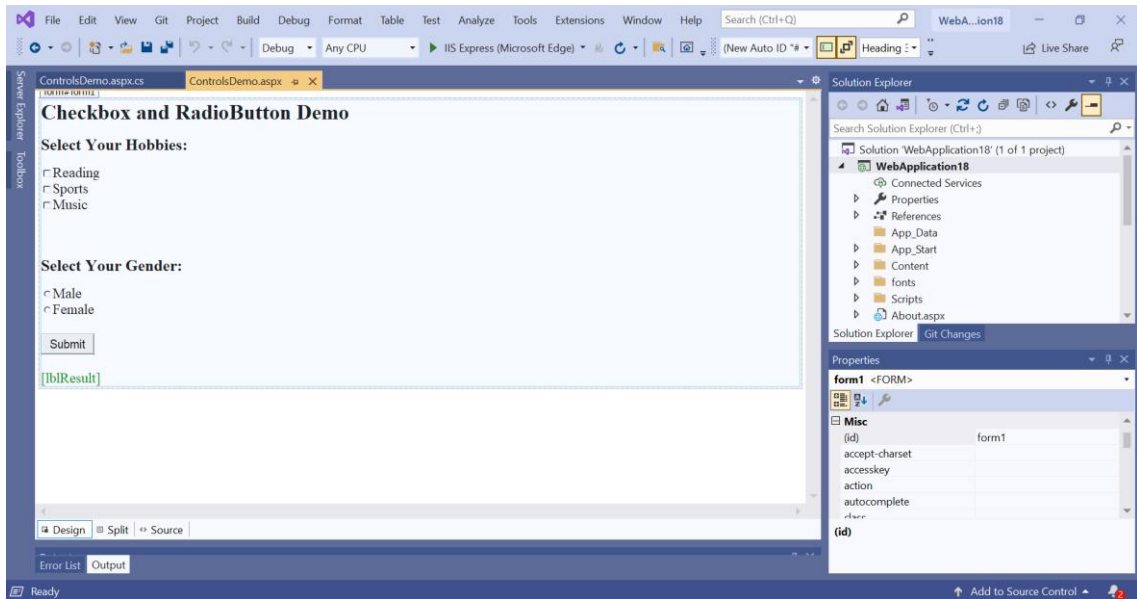

❖ OUTPUT

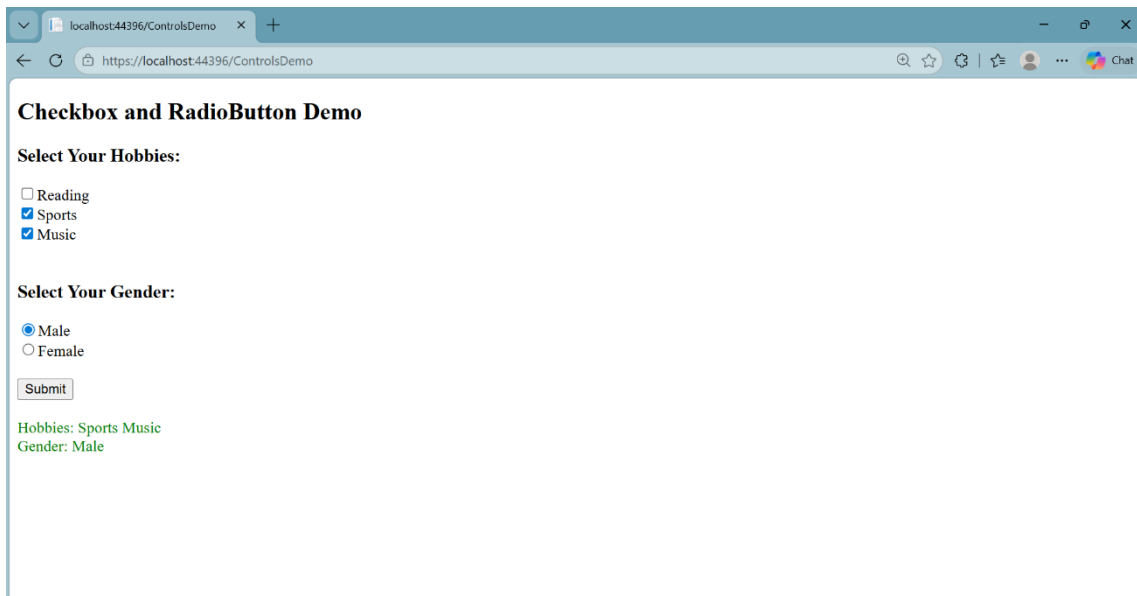

16. Write an ASP.NET Web Forms application that demonstrate the use of DropDownList for subject selection. The DropDownList should allow a user to select a subject (eg., Math, Science, and English) when the user clicks a button display selected subject on the screen.

❖ PROGRAM


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication19
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {


        }

        protected void btnShow_Click(object sender, EventArgs e)
        {
            if (ddlSubjects.SelectedIndex > 0)
            {
                lblResult.Text = "Selected Subject: " + ddlSubjects.SelectedItem.Text;
            }
            else
            {
                lblResult.Text = "Please select a subject!";
                lblResult.ForeColor = System.Drawing.Color.Red;
            }
        }
    }
}
```

❖ DESIGN PAGE

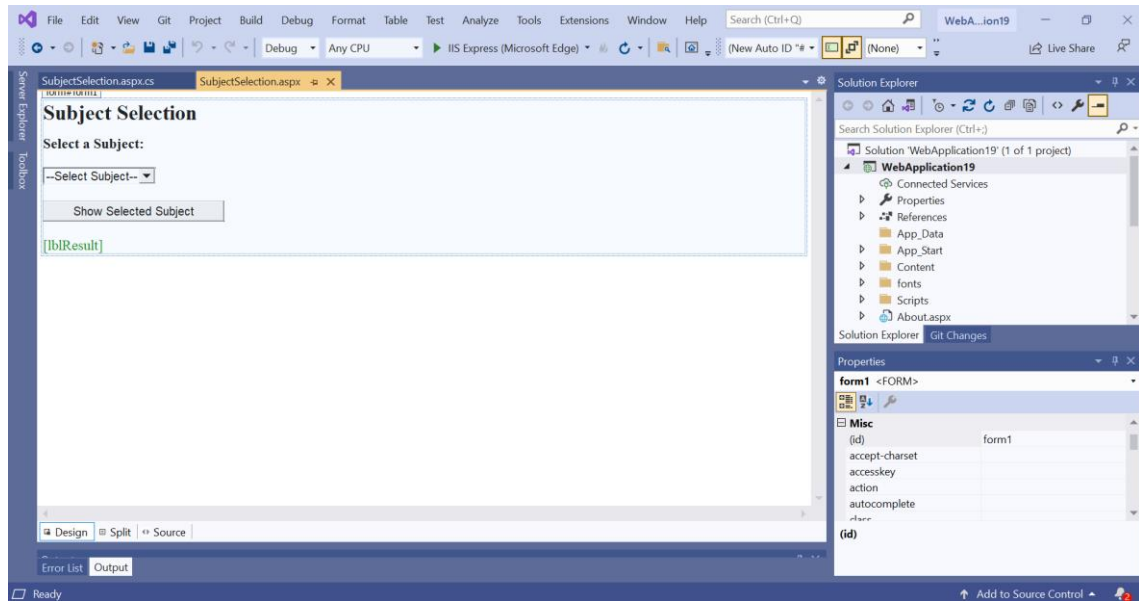

❖ OUTPUT

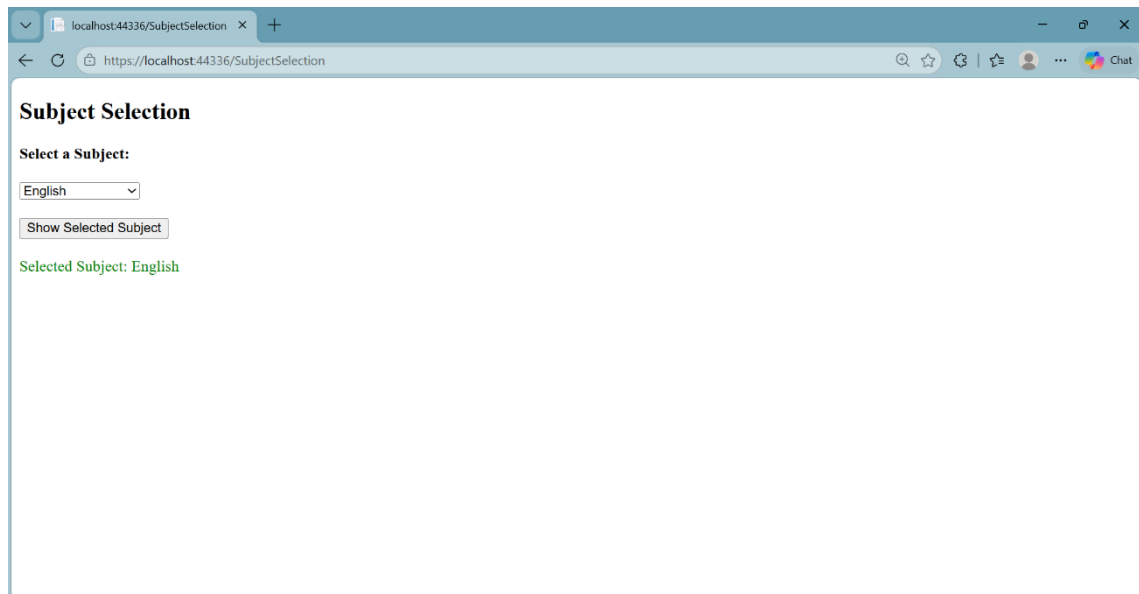

17. Implement an ASP.NET application to demonstrate User Controls.

❖ Header.ascx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication20
{
    public partial class WebUserControl1 : System.Web.UI.UserControl
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            lblDate.Text = "Date: " + DateTime.Now.ToShortDateString();
        }
    }
}
```

❖ WebForm1.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs"
Inherits="WebApplication20.WebForm1" %>
<%@ Register Src="~/Header.ascx" TagPrefix="uc" TagName="Header" %>

<!DOCTYPE html>


<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <uc:Header ID="Header1" runat="server" />

<br />



<h3>Welcome to Home Page</h3>

<asp:Label ID="lblMsg" runat="server" Text="This is main content area."></asp:Label>
    </form>
</body>
</html>
```

❖ DESIGN PAGE

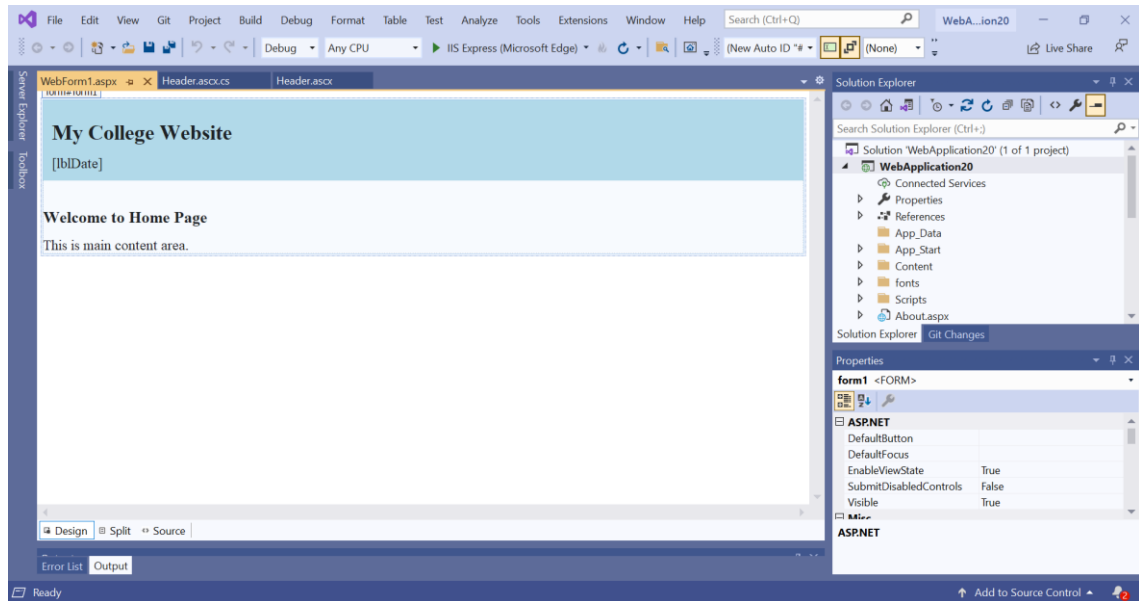

❖ OUTPUT

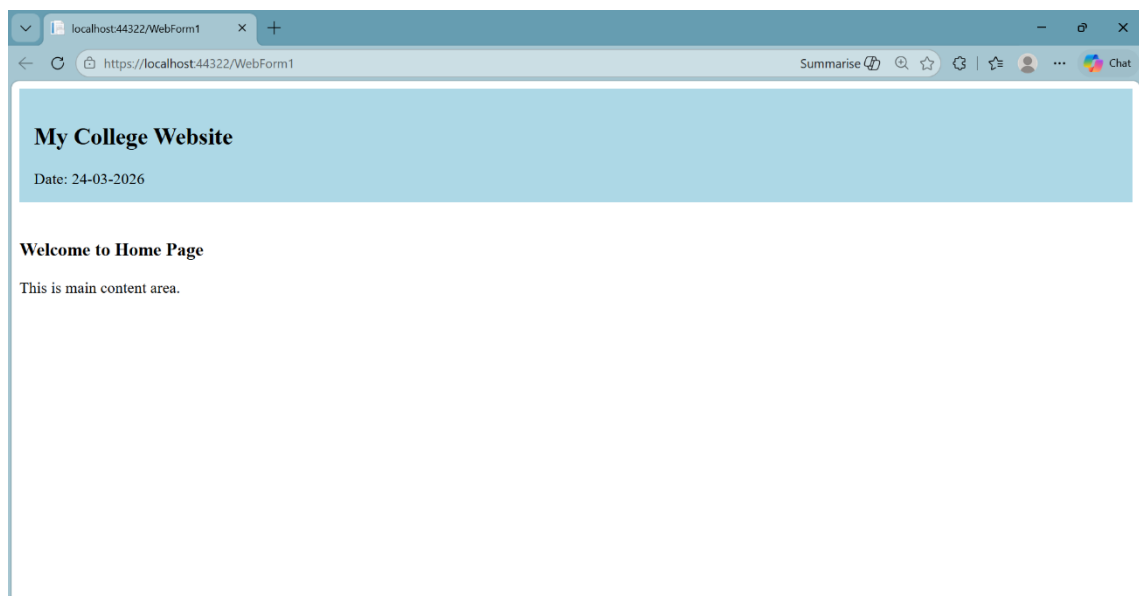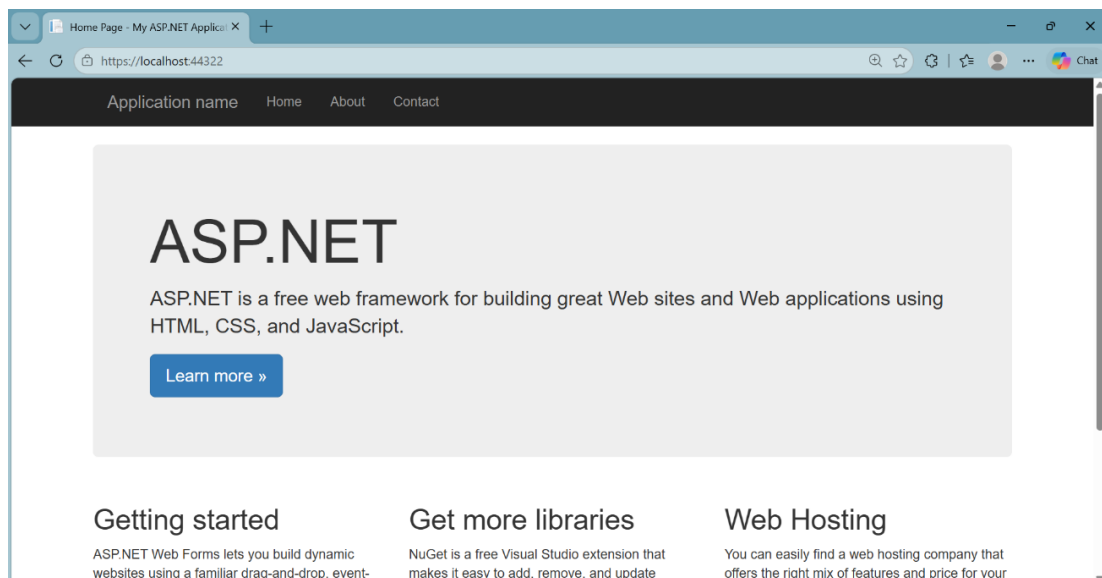

18. Implement an ASP.NET application to demonstrate binding of GridView, control by using ADO.NET.

❖ Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--
  For more information on how to configure your ASP.NET application, please visit
  https://go.microsoft.com/fwlink/?LinkId=169433
-->
<configuration>
  <connectionStrings>
    <add name="DBCS" connectionString="Data Source=localhost\SQLEXPRESS;Initial
Catalog=StudentDB;Integrated Security=True"
    providerName="System.Data.SqlClient" />
    <add name="StudentDBConnectionString" connectionString="Data
Source=localhost\SQLEXPRESS;Initial Catalog=StudentDB;Integrated Security=True"
    providerName="System.Data.SqlClient" />
  </connectionStrings>
  <system.web>
    <compilation debug="true" targetFramework="4.7.2" />
    <httpRuntime targetFramework="4.7.2" />
    <pages>
      <namespaces>
        <add namespace="System.Web.Optimization" />
      </namespaces>
      <controls>
        <add assembly="Microsoft.AspNet.Web.Optimization.WebForms"
namespace="Microsoft.AspNet.Web.Optimization.WebForms" tagPrefix="webopt" />
      </controls>
    </pages>
  </system.web>
  <runtime>
    <assemblyBinding xmlns="urn:schemas-microsoft-com:asm.v1">
      <dependentAssembly>
        <assemblyIdentity name="Antlr3.Runtime" publicKeyToken="eb42632606e9261f" />
        <bindingRedirect oldVersion="0.0.0.0-3.5.0.2" newVersion="3.5.0.2" />
      </dependentAssembly>
      <dependentAssembly>
        <assemblyIdentity name="Newtonsoft.Json" publicKeyToken="30ad4fe6b2a6aeed" />
        <bindingRedirect oldVersion="0.0.0.0-12.0.0.0" newVersion="12.0.0.0" />
      </dependentAssembly>
      <dependentAssembly>
        <assemblyIdentity name="WebGrease" publicKeyToken="31bf3856ad364e35" />
        <bindingRedirect oldVersion="0.0.0.0-1.6.5135.21930" newVersion="1.6.5135.21930"
/>
      </dependentAssembly>
    </assemblyBinding>
  </runtime>
  <system.codedom>
    <compilers>
```

```

    <compiler language="c#;cs;sharp" extension=".cs"
type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider,
Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral,
PublicKeyToken=31bf3856ad364e35" warningLevel="4"
compilerOptions="/langversion:default /nowarn:1659;1699;1701" />
    <compiler language="vb;vbs;visualbasic;vbscript" extension=".vb"
type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider,
Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral,
PublicKeyToken=31bf3856ad364e35" warningLevel="4"
compilerOptions="/langversion:default /nowarn:41008
/define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />
    </compilers>
    </system.codedom>
</configuration>

```

❖ **Default.aspx.cs**

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Data.SqlClient;
using System.Configuration;

namespace WebApplication27
{
    public partial class _Default : Page
    {
        string cs = ConfigurationManager.ConnectionStrings["DBCS"].ConnectionString;
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                BindGrid();
            }
        }
        protected void btnInsert_Click(object sender, EventArgs e)
        {
            SqlConnection con = new SqlConnection(cs);
            SqlCommand cmd = new SqlCommand("INSERT INTO Students
VALUES(@Name,@Age,@City)", con);

            cmd.Parameters.AddWithValue("@Name", txtName.Text);
            cmd.Parameters.AddWithValue("@Age", txtAge.Text);
            cmd.Parameters.AddWithValue("@City", txtCity.Text);

            con.Open();
            cmd.ExecuteNonQuery();
        }
    }
}

```

```

        con.Close();

        BindGrid();
    }
    protected void GridView1_RowEditing(object sender, GridViewEditEventArgs e)
    {
        GridView1.EditIndex = e.NewEditIndex;
        BindGrid();
    }
    protected void GridView1_RowCancelingEdit(object sender,
GridViewCancelEventArgs e)
    {
        GridView1.EditIndex = -1;
        BindGrid();
    }
    protected void GridView1_RowUpdating(object sender, GridViewUpdateEventArgs e)
    {
        int id = Convert.ToInt32(GridView1.DataKeys[e.RowIndex].Value);

        TextBox name = (TextBox)GridView1.Rows[e.RowIndex].Cells[1].Controls[0];
        TextBox age = (TextBox)GridView1.Rows[e.RowIndex].Cells[2].Controls[0];
        TextBox city = (TextBox)GridView1.Rows[e.RowIndex].Cells[3].Controls[0];

        SqlConnection con = new SqlConnection(cs);
        SqlCommand cmd = new SqlCommand("UPDATE Students SET Name=@Name,
Age=@Age, City=@City WHERE Id=@Id", con);

        cmd.Parameters.AddWithValue("@Name", name.Text);
        cmd.Parameters.AddWithValue("@Age", age.Text);
        cmd.Parameters.AddWithValue("@City", city.Text);
        cmd.Parameters.AddWithValue("@Id", id);

        con.Open();
        cmd.ExecuteNonQuery();
        con.Close();

        GridView1.EditIndex = -1;
        BindGrid();
    }
    protected void GridView1_RowDeleting(object sender, GridViewDeleteEventArgs e)
    {
        int id = Convert.ToInt32(GridView1.DataKeys[e.RowIndex].Value);

        SqlConnection con = new SqlConnection(cs);
        SqlCommand cmd = new SqlCommand("DELETE FROM Students WHERE
Id=@Id", con);

        cmd.Parameters.AddWithValue("@Id", id);

        con.Open();
        cmd.ExecuteNonQuery();
    }

```

```

        con.Close();


        BindGrid();
    }
    void BindGrid()
    {
        SqlConnection con = new SqlConnection(cs);
        SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Students", con);
        DataTable dt = new DataTable();
        _ = da.Fill(dt);

        GridView1.DataBind();



    }
}

```

❖ DESIGN PAGE

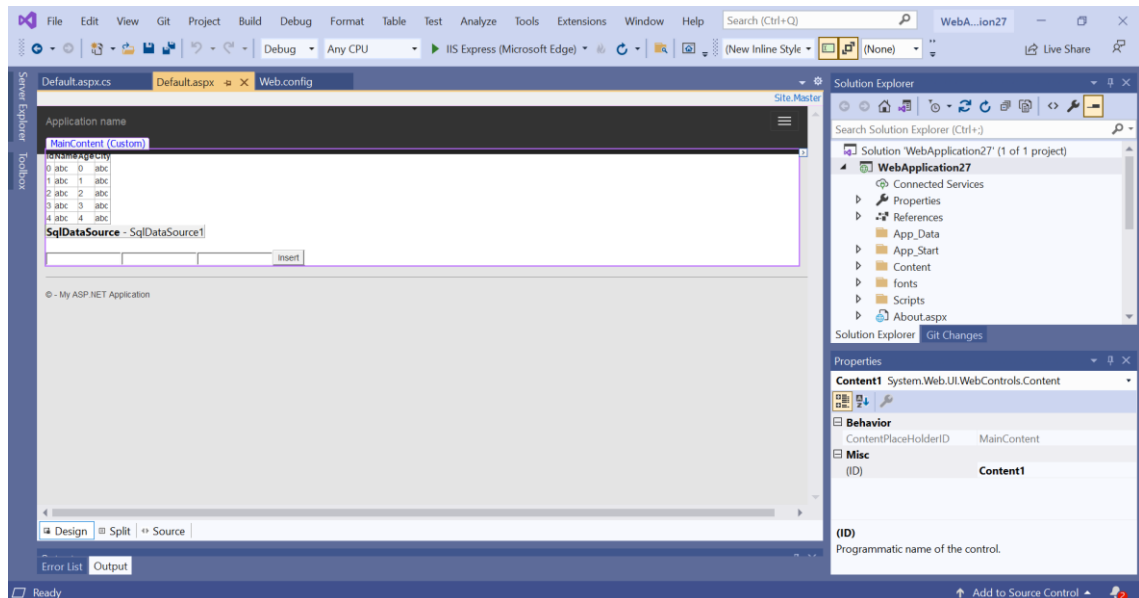

❖ OUTPUT

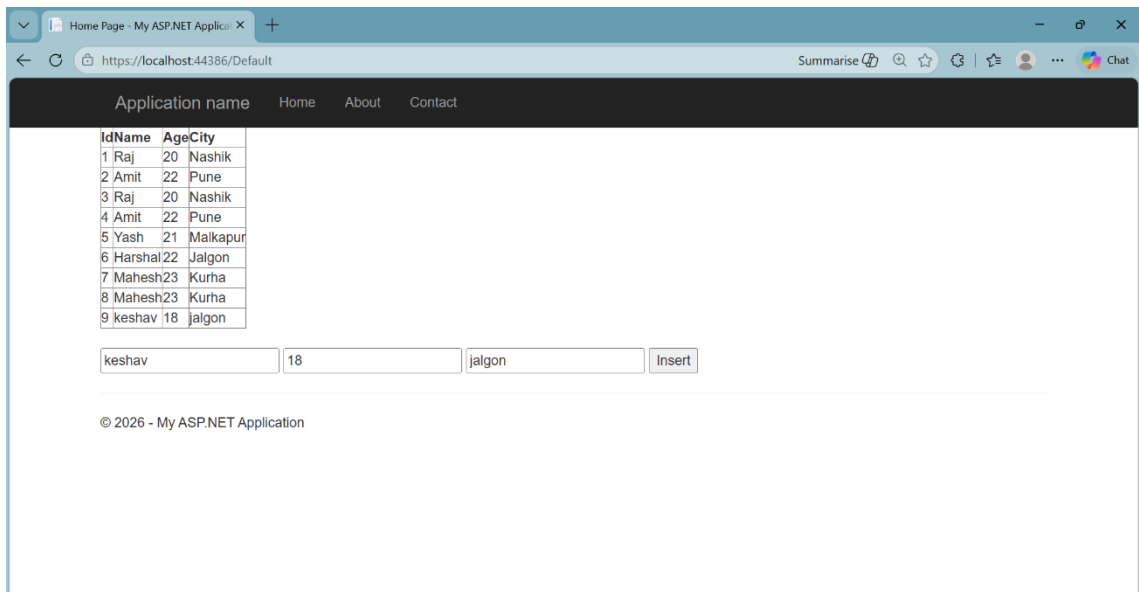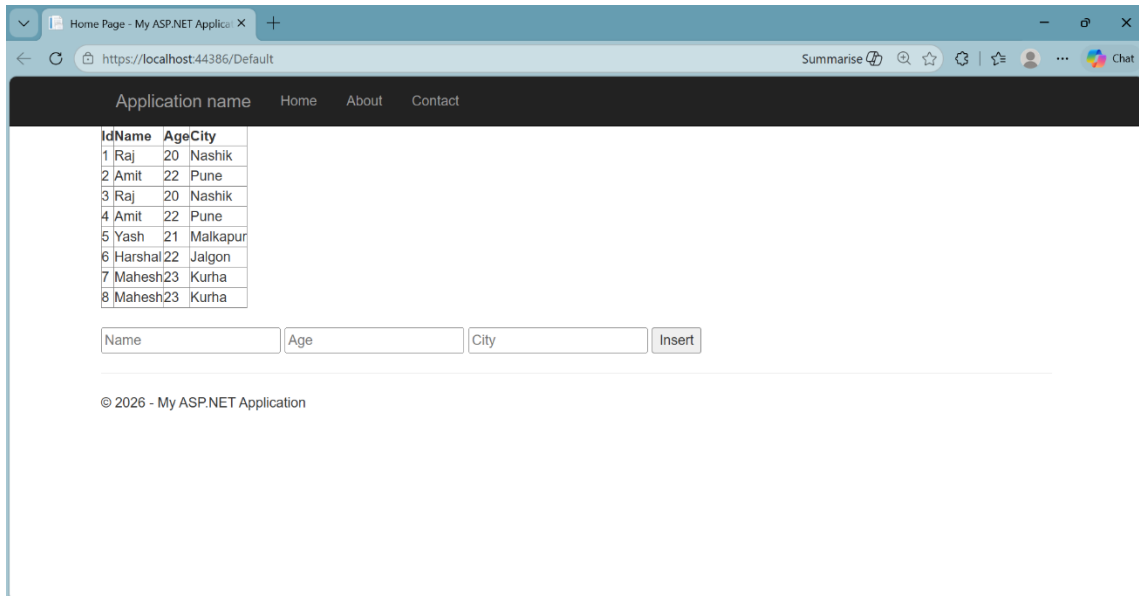

19. ASP.NET that returns the windows name of your computer.

❖ PROGRAM

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;


namespace WebApplication24
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }


        protected void Button1_Click(object sender, EventArgs e)
        {
            string name = Environment.MachineName;

            Label1.Text = "Computer Name: " + name;
        }
    }
}
```

❖ DESIGN PAGE

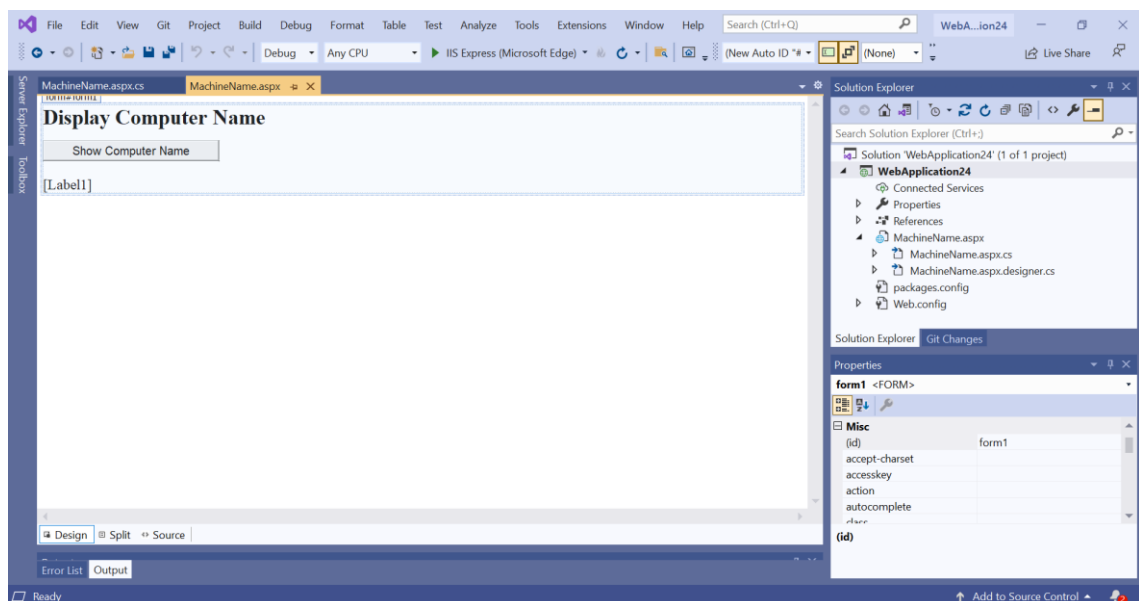

❖ OUTPUT

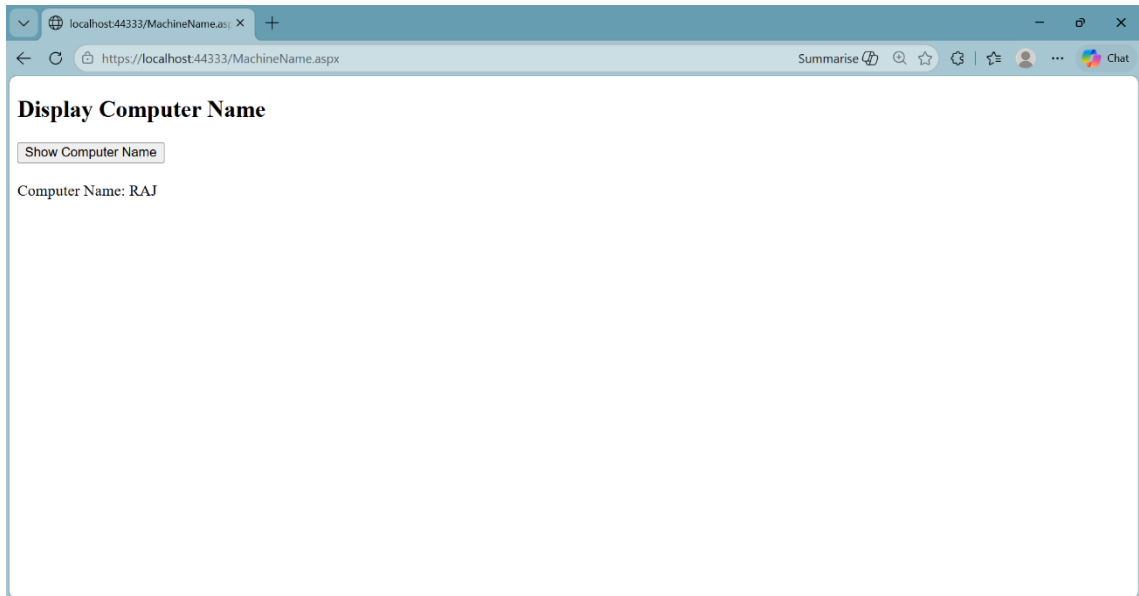

20. Write an ASP.NET Web Forms application that demonstrates navigation using both `Server.Transfer()` and `Response.Redirect()`. Create two pages (`Page1.aspx` and `Page2.aspx`). On `Page1.aspx`, provide two buttons: one that navigates to `Page2.aspx` using `Server.Transfer()` and another using `Response.Redirect()`. Display a message on `Page2.aspx` showing how the navigation occurred.

❖ **Page1.aspx.cs**

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication25
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            Server.Transfer("Page2.aspx?method=transfer");
        }

        protected void Button2_Click(object sender, EventArgs e)
        {
            Response.Redirect("Page2.aspx?method=redirect");
        }
    }
}
```

❖ **Page2.aspx.cs**

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;



namespace WebApplication25
{
    public partial class WebForm2 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            string method = Request.QueryString["method"];
        }
    }
}
```

```



if (method == "transfer")
{
    Label1.Text = "Navigated using Server.Transfer()";
}
else if (method == "redirect")
{
    Label1.Text = "Navigated using Response.Redirect()";
}
else
{
    Label1.Text = "Navigation method unknown";
}
}
}
}

```

❖ DESIGN PAGE

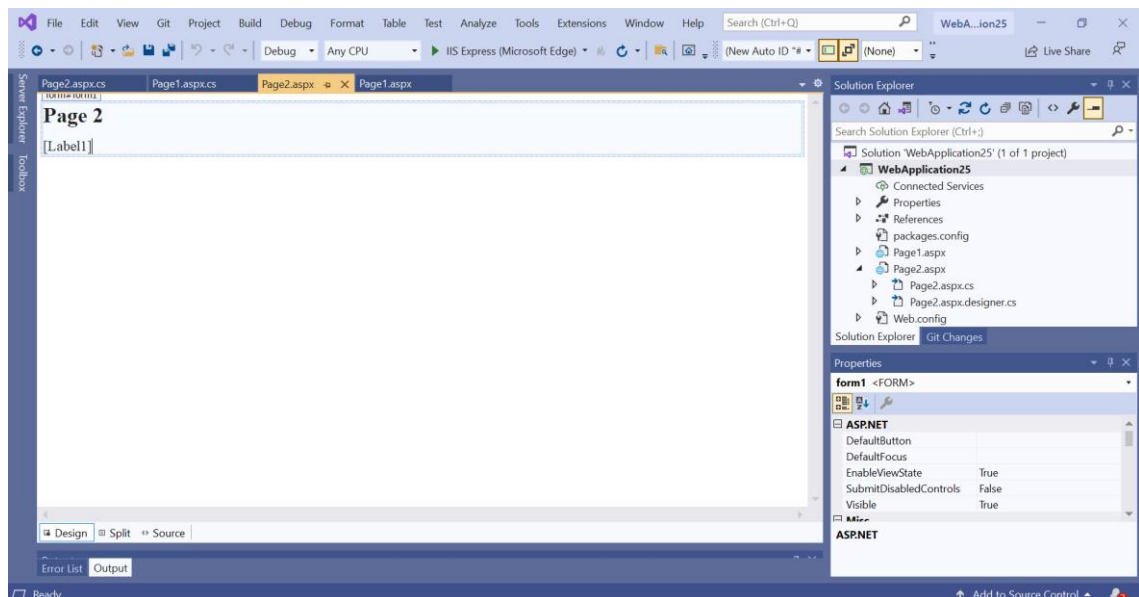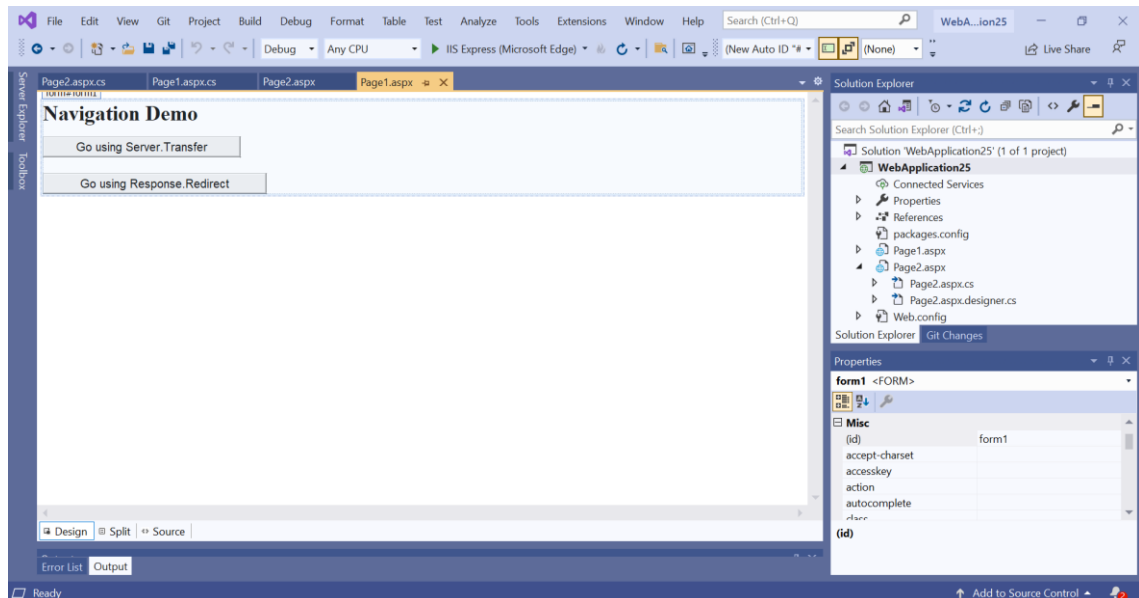

❖ OUTPUT

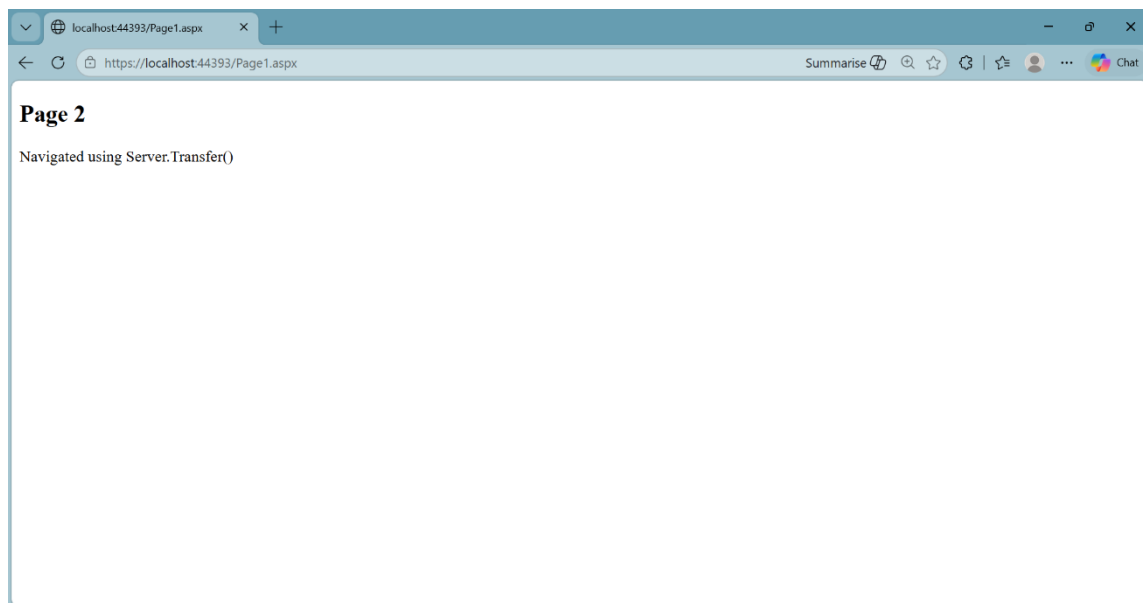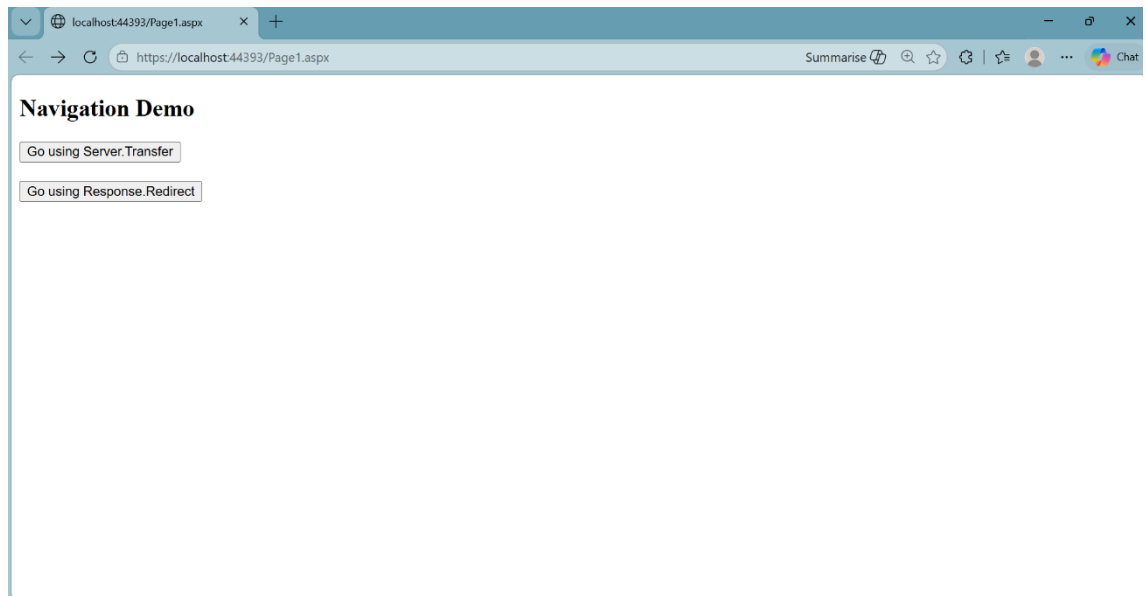

21.ASP.NET program that demonstrate Application and Session Scope Variables using Global.asax.

❖ Global.asax.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.SessionState;

namespace WebApplication26
{
    public class Global : System.Web.HttpApplication
    {

        protected void Application_Start(object sender, EventArgs e)
        {
            Application["TotalUsers"] = 0;
        }

        protected void Session_Start(object sender, EventArgs e)
        {
            Application["TotalUsers"] = (int)Application["TotalUsers"] + 1;

            Session["UserID"] = Application["TotalUsers"];
        }

        protected void Application_BeginRequest(object sender, EventArgs e)
        {

        }

        protected void Application_AuthenticateRequest(object sender, EventArgs e)
        {

        }

        protected void Application_Error(object sender, EventArgs e)
        {

        }

        protected void Session_End(object sender, EventArgs e)
        {

        }

        protected void Application_End(object sender, EventArgs e)
        {

        }
    }
}
```

```

    }
}
}
❖ Default.aspx.xc

```

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

```


```

namespace WebApplication26
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            int totalUsers = (int)Application["TotalUsers"];
            int userID = (int)Session["UserID"];


            Label1.Text = "Total Users: " + totalUsers + "<br/>" +
                "Your Session ID: " + userID;
        }
    }
}

```

❖ DESIGN PAGE

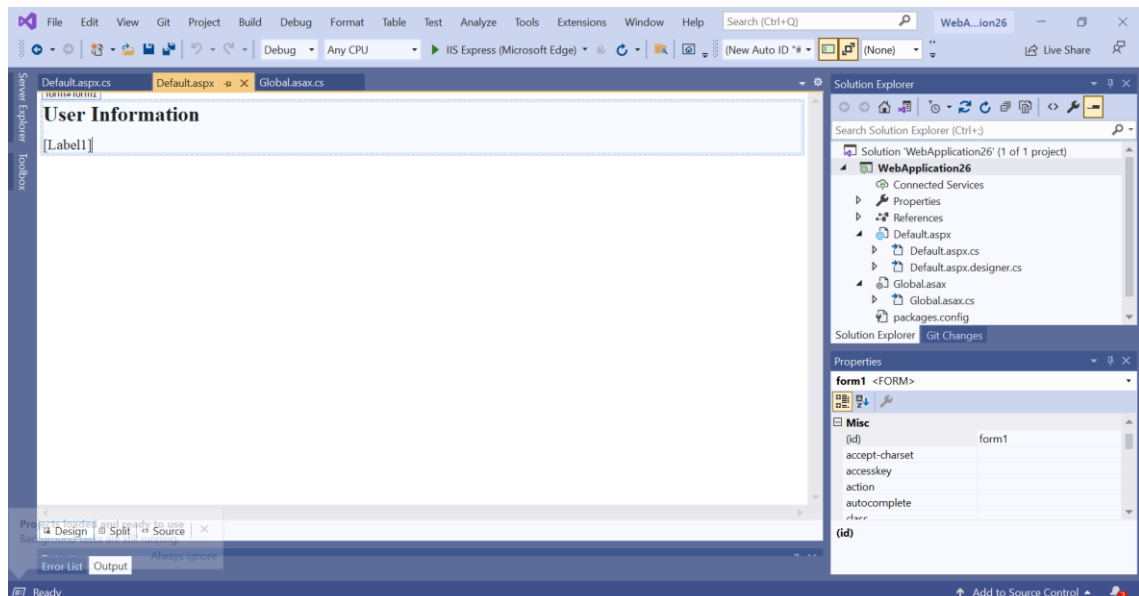

❖ OUTPUT

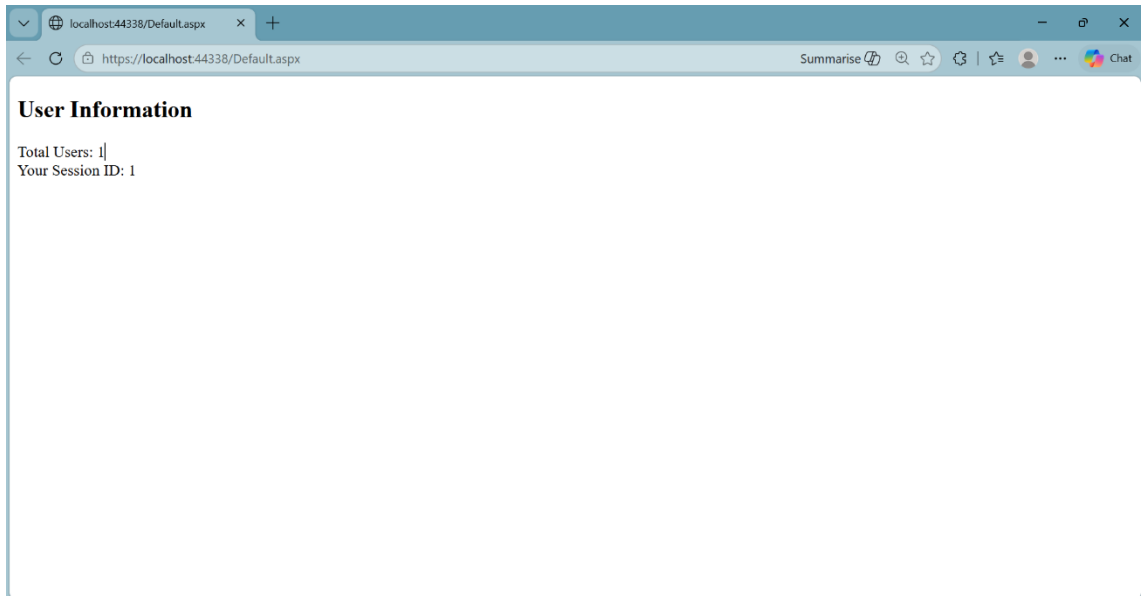

22.Implement Master Pages and website navigation control (sitemap path, tree view, and menu) using SiteMap file.

❖ Site.Master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeBehind="Site.Master.cs"
Inherits="WebApplication28.SiteMaster" %>
```

```
<!DOCTYPE html>
```

```
<html>
```

```
<head runat="server">
```

```
<title>Navigation Demo</title>
```

```
</head>
```

```
<body>
```

```
<form runat="server">
```

```
<h1>My Website</h1>
```

```
<!-- MENU -->
```

```
<asp:Menu ID="Menu1" runat="server" DataSourceID="SiteMapDataSource1"
Orientation="Horizontal" BackColor="LightBlue">
```

```
</asp:Menu>
```

```
<!-- BREADCRUMB -->
```

```
<asp:SiteMapPath ID="SiteMapPath1" runat="server"></asp:SiteMapPath>
```

```
<hr />
```

```
<div style="display:flex">
```

```
<!-- TREEVIEW -->
```

```
<div style="width:200px;">
```

```
<asp:TreeView ID="TreeView1" runat="server"
```

```
DataSourceID="SiteMapDataSource1">
```

```
</asp:TreeView>
```

```
</div>
```

```
<!-- CONTENT -->
```

```
<div style="margin-left:20px;">
```

```
<asp:ContentPlaceHolder ID="MainContent" runat="server" />
```

```
</div>
```

```
</div>
```

```
<!-- DATASOURCE -->
```

```
<asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />
```

```
</form>
```

```
</body>
```

```
</html>
```

❖ Web.sitemap

```
<?xml version="1.0" encoding="utf-8" ?>
```

```
<siteMap xmlns="http://schemas.microsoft.com/AspNet/SiteMap-File-1.0">
```

```
    <siteMapNode url="Default.aspx" title="Home">
```

```
        <siteMapNode url="About.aspx" title="About Us" />
```

```
    <siteMapNode url="Services.aspx" title="Services">
```

```
        <siteMapNode url="WebDesign.aspx" title="Web Design" />
```

```
        <siteMapNode url="SEO.aspx" title="SEO" />
```

```
    </siteMapNode>
```

```
    <siteMapNode url="Contact.aspx" title="Contact" />
```

```
</siteMapNode>
```

```
</siteMap>
```

❖ Default.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site.Master"
```

```
AutoEventWireup="true" CodeBehind="Default.aspx.cs"
```

```
Inherits="WebApplication28.WebForm1" %>
```


```
<asp:Content ID="Content1" ContentPlaceHolderID="MainContent" runat="server">
```

```
    <h2>Welcome to Home Page</h2>
```


```
    <p>This is homepage content.</p>
```

```
</asp:Content>
```

❖ DESIGN PAGE

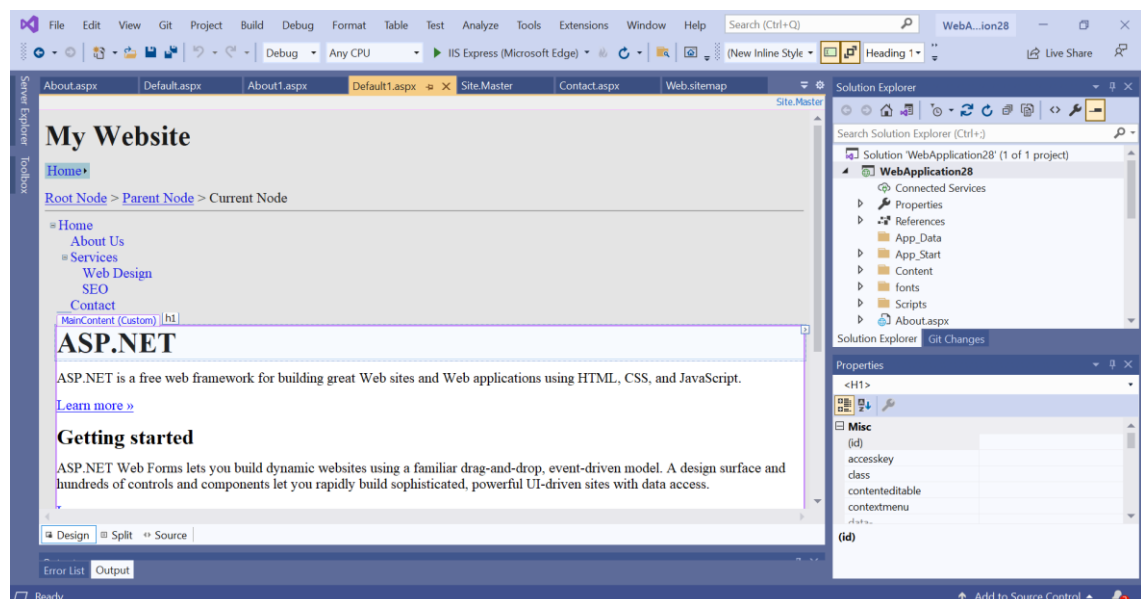

❖ OUTPUT

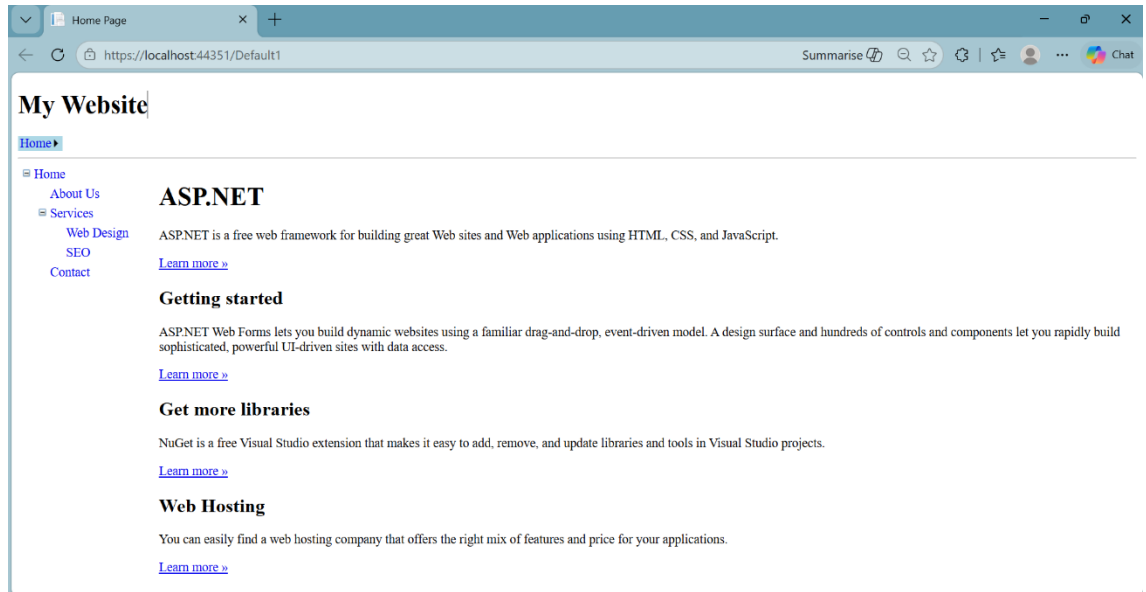

23. Implement sample website for demonstrating use of profiles/Themes using skin file.

❖ Default.aspx.cs


```
using System;

using System.Web;
namespace _26_Profile_Themes
{
    public partial class Default : System.Web.UI.Page
    {
        protected void Page_PreInit(object sender, EventArgs e)
        {
            if (HttpContext.Current.Profile["ThemeName"] != null)
            {
                Page.Theme = HttpContext.Current.Profile["ThemeName"].ToString();
            }
        }
        protected void Page_Load(object sender, EventArgs e)
        {
        }
        protected void btnSave_Click(object sender, EventArgs e)
        {
            HttpContext.Current.Profile["UserName"] = txtName.Text;
            HttpContext.Current.Profile["ThemeName"] = ddlTheme.SelectedValue; lblMessage.Text =
            "Profile Saved for " + txtName.Text;
        }
    }
}
```

❖ SkinFile.skin

```
<asp:Button runat="server" BackColor="LightBlue" ForeColor="Black" Font-Bold="true" />
<asp:Label runat="server" ForeColor="Blue" Font-Size="Large" />
```

❖ DESIGN PAGE

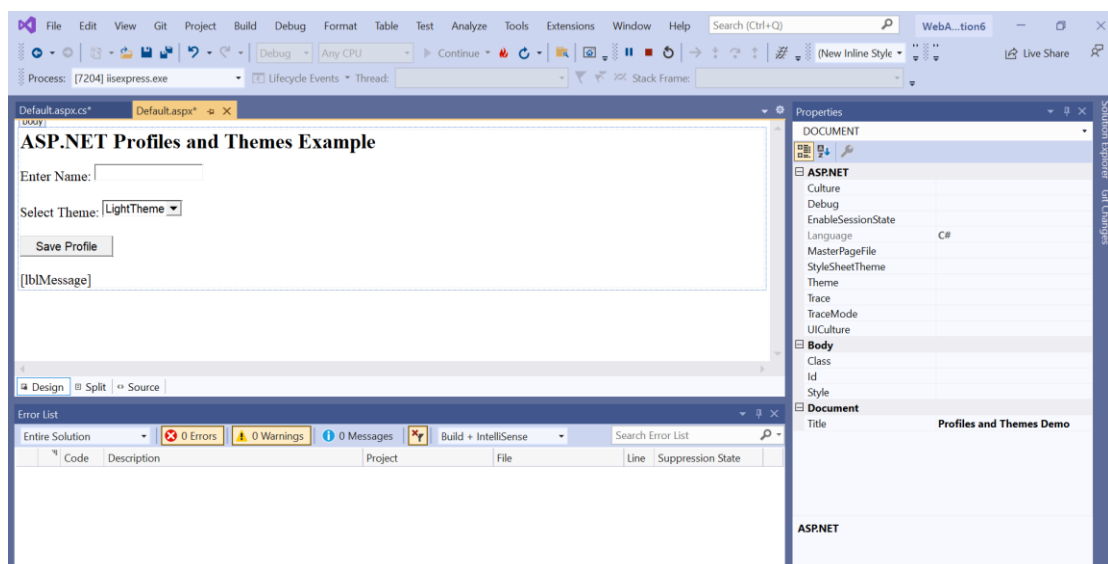

❖ OUTPUT



ASP.NET Profiles and Themes Example

Enter Name:

Select Theme:

Save Profile

24. Demonstrate website navigation controls using menu.

❖ Home.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Home.aspx.cs"
Inherits="WebApplication31.WebForm1" %>
```

```
<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
<title></title>
```

```
</head>
```

```
<body>
```

```
<form id="form1" runat="server">
```

```
<h2>Menu Navigation</h2>
```

```
<asp:Menu ID="Menu1" runat="server" Orientation="Horizontal">
```

```
<Items>
```

```
<asp:MenuItem Text="Home" NavigateUrl="Home.aspx" />
```

```
<asp:MenuItem Text="About" NavigateUrl="About.aspx" />
```

```
<asp:MenuItem Text="Contact" NavigateUrl="Contact.aspx" />
```

```
</Items>
```

```
</asp:Menu>
```

```
<hr />
```

```
<h3>Welcome to Home Page</h3>
```

```
</form>
```

```
</body>
```

```
</html>
```

❖ About.aspx

```
<%@ Page Title="About" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeBehind="About.aspx.cs" Inherits="WebApplication31.About"
%>
```

```
<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
<title></title>
```

```
</head>
```

```
<body>
```

```
<form id="form1" runat="server">
```

```
<asp:Menu ID="Menu1" runat="server" Orientation="Horizontal">
```

```
<Items>
```

```
<asp:MenuItem Text="Home" NavigateUrl="Home.aspx" />
```

```
        <asp:MenuItem Text="About" NavigateUrl="About.aspx" />
        <asp:MenuItem Text="Contact" NavigateUrl="Contact.aspx" />
    </Items>
</asp:Menu>
```

```
<hr />
```

```
<h3>About Page</h3>
```

```
</form>
```

```
</body>
```

```
</html>
```

❖ **Contact.aspx**

```
<%@ Page Title="Contact" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeBehind="Contact.aspx.cs"
Inherits="WebApplication31.Contact" %>
<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
```

```
<head runat="server">
```

```
    <title></title>
```

```
</head>
```

```
<body>
```

```
<form id="form1" runat="server">
```

```
    <asp:Menu ID="Menu1" runat="server" Orientation="Horizontal">
```

```
        <Items>
```

```
            <asp:MenuItem Text="Home" NavigateUrl="Home.aspx" />
```

```
            <asp:MenuItem Text="About" NavigateUrl="About.aspx" />
```

```
            <asp:MenuItem Text="Contact" NavigateUrl="Contact.aspx" />
```

```
        </Items>
```

```
    </asp:Menu>
```

```
<hr />
```


```
<h3>Contact Page</h3>
```

```
</form>
```

```
</body>
```

```
</html>
```

❖ OUTPUT

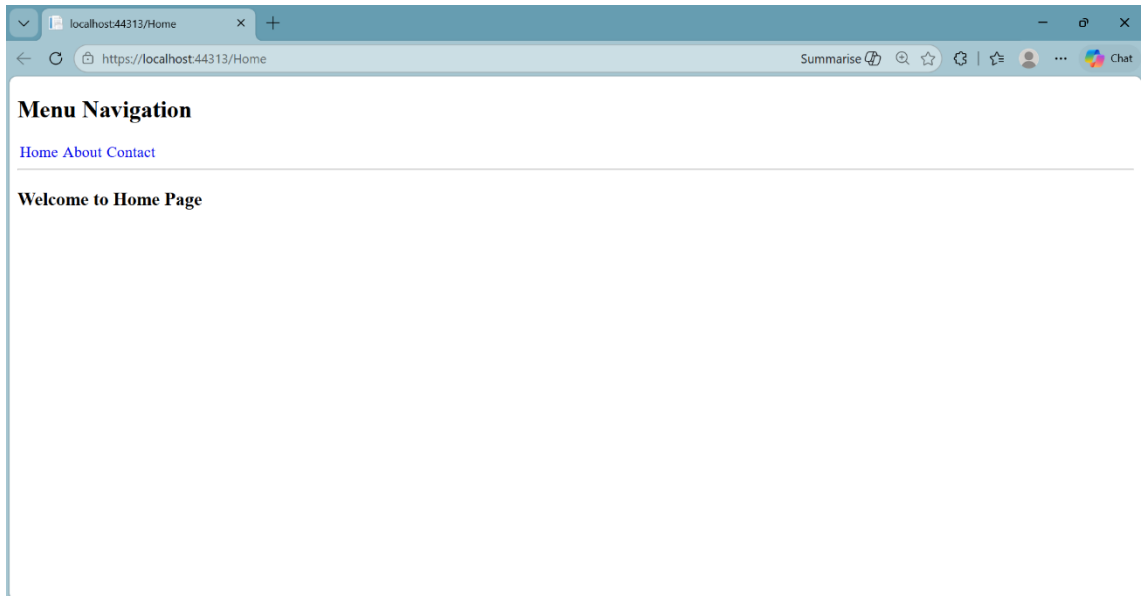

25.Design a web application insert delete and update operation using GridView control ADO.NET.

❖ PROGRAM

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Data.SqlClient;
using System.Configuration;

namespace WebApplication31
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                BindGrid();
            }
        }
        string cs =
ConfigurationManager.ConnectionStrings["StudentDBConnectionString"].ConnectionString;

        void BindGrid()
        {
            using (SqlConnection con = new SqlConnection(cs))
            {
                SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Students", con);
                DataTable dt = new DataTable();
                da.Fill(dt);

            }
        }

        protected void btnInsert_Click(object sender, EventArgs e)
        {
            using (SqlConnection con = new SqlConnection(cs))
            {
                string query = "INSERT INTO Students(Name, Age, City) VALUES(@Name,
@Age, @City)";
                SqlCommand cmd = new SqlCommand(query, con);

                cmd.Parameters.AddWithValue("@Name", txtName.Text);
                cmd.Parameters.AddWithValue("@Age", txtAge.Text);
                cmd.Parameters.AddWithValue("@City", txtCity.Text);
```

```

        con.Open();
        cmd.ExecuteNonQuery();
        con.Close();

        BindGrid();
    }
}

protected void GridView1_RowEditing(object sender, GridViewEditEventArgs e)
{
    GridView1.EditIndex = e.NewEditIndex;
    BindGrid();
}

protected void GridView1_RowCancelingEdit(object sender,
GridViewCancelEventArgs e)
{
    GridView1.EditIndex = -1;
    BindGrid();
}

protected void GridView1_RowUpdating(object sender, GridViewUpdateEventArgs e)
{
    int id = Convert.ToInt32(GridView1.DataKeys[e.RowIndex].Value);

    TextBox name = (TextBox)GridView1.Rows[e.RowIndex].Cells[1].Controls[0];
    TextBox age = (TextBox)GridView1.Rows[e.RowIndex].Cells[2].Controls[0];
    TextBox city = (TextBox)GridView1.Rows[e.RowIndex].Cells[3].Controls[0];

    using (SqlConnection con = new SqlConnection(cs))
    {
        string query = "UPDATE Students SET Name=@Name, Age=@Age, City=@City
WHERE Id=@Id";
        SqlCommand cmd = new SqlCommand(query, con);

        cmd.Parameters.AddWithValue("@Id", id);
        cmd.Parameters.AddWithValue("@Name", name.Text);
        cmd.Parameters.AddWithValue("@Age", age.Text);
        cmd.Parameters.AddWithValue("@City", city.Text);

        con.Open();
        cmd.ExecuteNonQuery();
        con.Close();

        GridView1.EditIndex = -1;
        BindGrid();
    }
}

protected void GridView1_RowDeleting(object sender, GridViewDeleteEventArgs e)
{
    int id = Convert.ToInt32(GridView1.DataKeys[e.RowIndex].Value);

    using (SqlConnection con = new SqlConnection(cs))

```


```
{
    string query = "DELETE FROM Students WHERE Id=@Id";
    SqlCommand cmd = new SqlCommand(query, con);

    cmd.Parameters.AddWithValue("@Id", id);


    con.Open();
    cmd.ExecuteNonQuery();
    con.Close();

    BindGrid();
}
}
```

◆ **DESIGN PAGE**

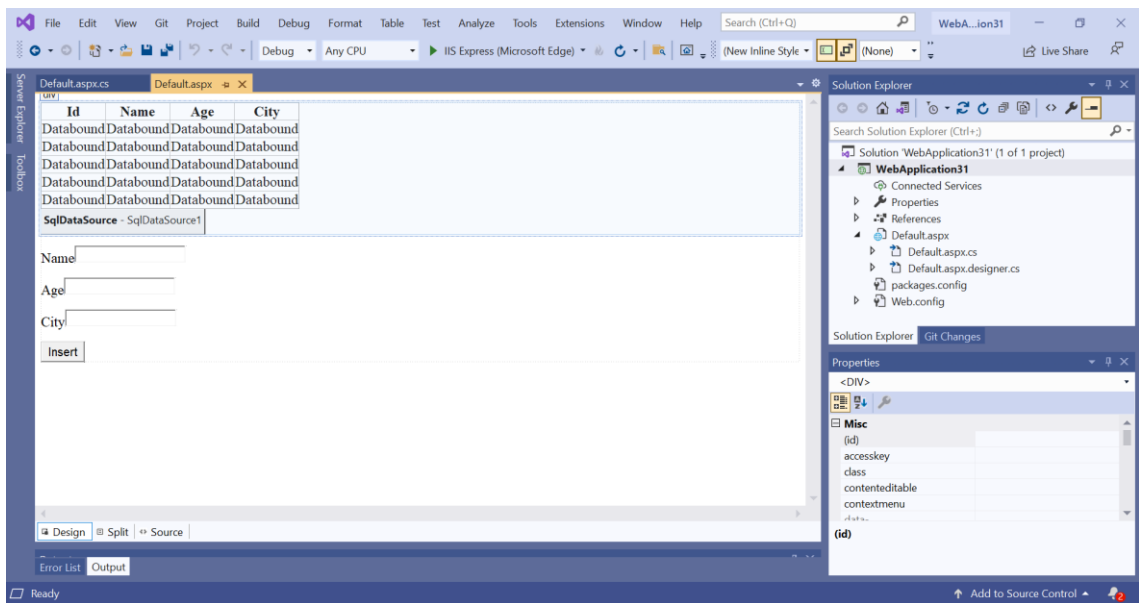

❖ **OUTPUT**

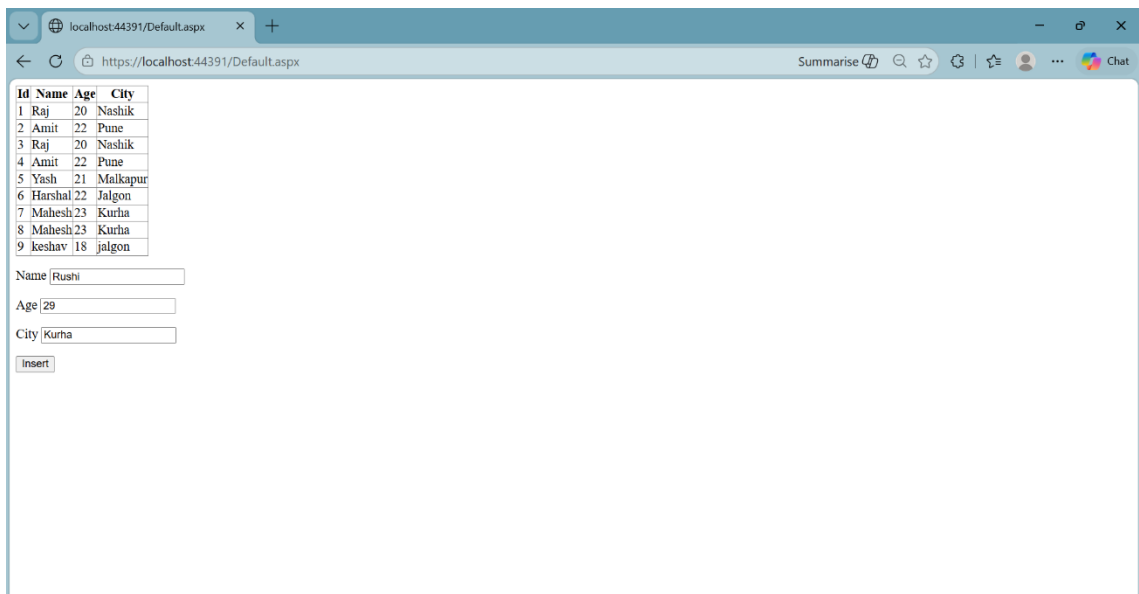

26. Demonstrate website navigation controls (SiteMap path treeview) using SiteMap file.

❖ Default.aspx

```
<%@ Page Title="Home Page" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeBehind="Default.aspx.cs"
Inherits="WebApplication33._Default" %>

<asp:Content ID="BodyContent" ContentPlaceHolderID="MainContent" runat="server">

<asp:TreeView ID="TreeView1" runat="server"
    DataSourceID="SiteMapDataSource1"
    ShowLines="true">
</asp:TreeView>

<asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />

<asp:SiteMapPath ID="SiteMapPath1" runat="server"
    PathSeparator=" > "
    Font-Size="Large"
    ForeColor="Blue">
</asp:SiteMapPath>

</asp:Content>
```

❖ About.aspx

```
<%@ Page Title="About" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeBehind="About.aspx.cs" Inherits="WebApplication33.About"
%>

<asp:Content ID="BodyContent" ContentPlaceHolderID="MainContent" runat="server">

<asp:TreeView ID="TreeView1" runat="server"
    DataSourceID="SiteMapDataSource1"
    ShowLines="true">
</asp:TreeView>

<asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />

<asp:SiteMapPath ID="SiteMapPath1" runat="server"
    PathSeparator=" > "
    Font-Size="Large"
    ForeColor="Blue">
</asp:SiteMapPath>

</asp:Content>
```

❖ Contact.aspx

```
<%@ Page Title="Contact" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeBehind="Contact.aspx.cs"
Inherits="WebApplication33.Contact" %>
```

```
<asp:Content ID="BodyContent" ContentPlaceHolderID="MainContent" runat="server">
```

```
<asp:TreeView ID="TreeView1" runat="server"  
    DataSourceID="SiteMapDataSource1"  
    ShowLines="true">  
</asp:TreeView>
```

```
<asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />
```


```
<asp:SiteMapPath ID="SiteMapPath1" runat="server"  
    PathSeparator=" > "  
    Font-Size="Large"  
    ForeColor="Blue">  
</asp:SiteMapPath>
```

```
</asp:Content>
```




❖ Web.sitemap

```
<?xml version="1.0" encoding="utf-8" ?>  
<siteMap xmlns="http://schemas.microsoft.com/AspNet/SiteMap-File-1.0" >  
    <siteMapNode url="Default.aspx" title="Home" description="Home Page">  
  
        <siteMapNode url="About.aspx" title="About Us" description="About Page"  
  
        <siteMapNode url="Contact.aspx" title="Contact" description="Contact Page"  
  
    </siteMapNode>  
</siteMap>
```

❖ DESIGN PAGE

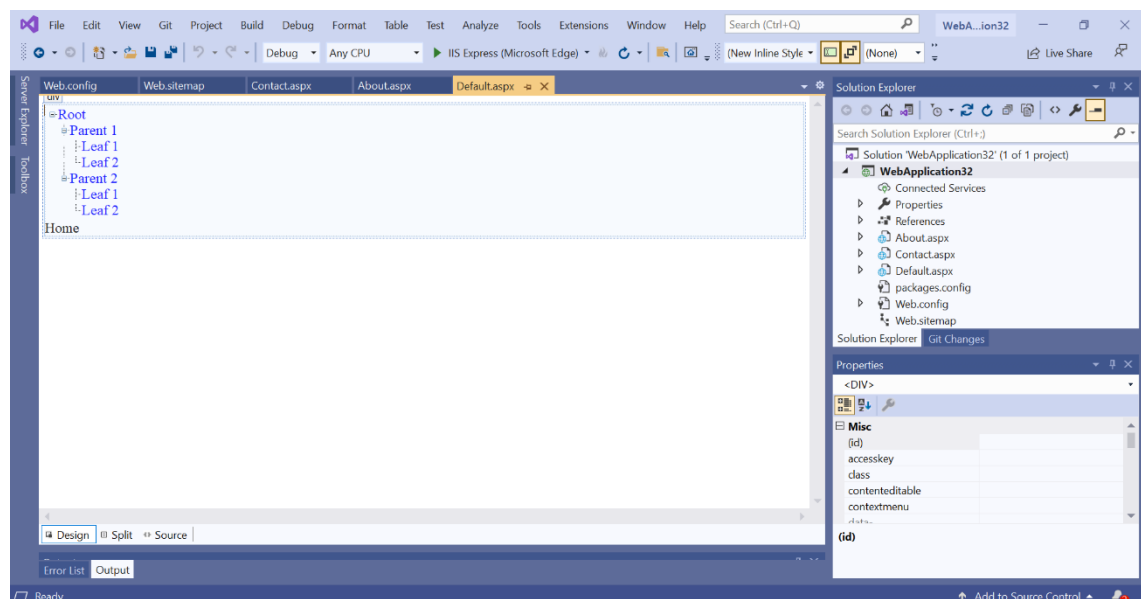

❖ OUTPUT

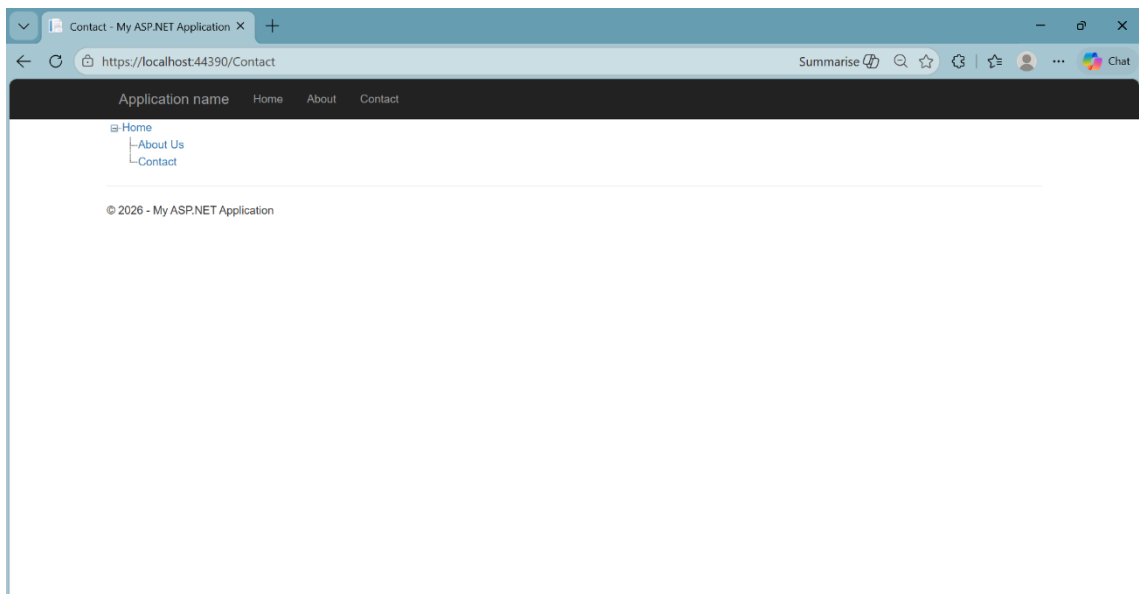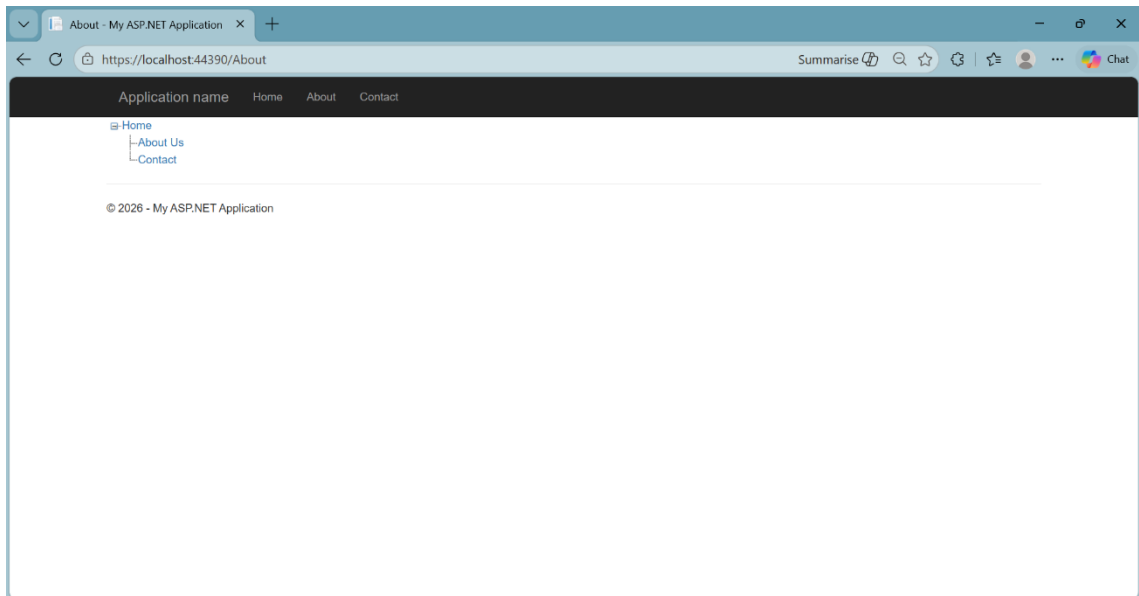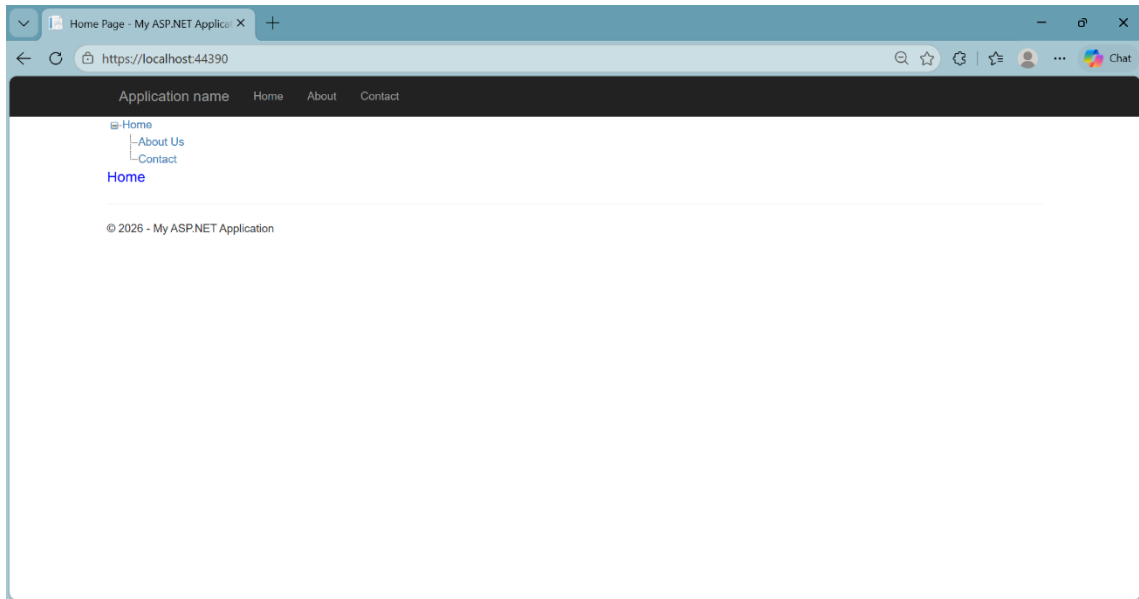

27. Write an ASP.NET program that demonstrates use login status and login control.

❖ Login.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Web.Security;

namespace WebApplication2
{
    public partial class Login : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Login1_Authenticate(object sender, AuthenticateEventArgs e)
        {
            if (Login1.UserName == "admin" && Login1.Password == "1234")
            {
                e.Authenticated = true;
                FormsAuthentication.RedirectFromLoginPage(Login1.UserName, false);
            }
            else
            {
                e.Authenticated = false;
            }
        }
    }
}
```

❖ Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs"
Inherits="WebApplication2.Default" %>
```

```
<!DOCTYPE html>
<html>
<head runat="server">
    <title>Home Page</title>
</head>
<body>
    <form id="form1" runat="server">

        <h2>Welcome to Website</h2>

        <!-- Login Name -->
        <asp:LoginName ID="LoginName1" runat="server" />
```


<!-- Login Status -->



```
<asp:LoginStatus ID="LoginStatus1" runat="server"
    LogoutAction="Redirect"
    LogoutPageUrl="Login.aspx" />
```

</form>


</body>

</html>

❖ DESIGN PAGE

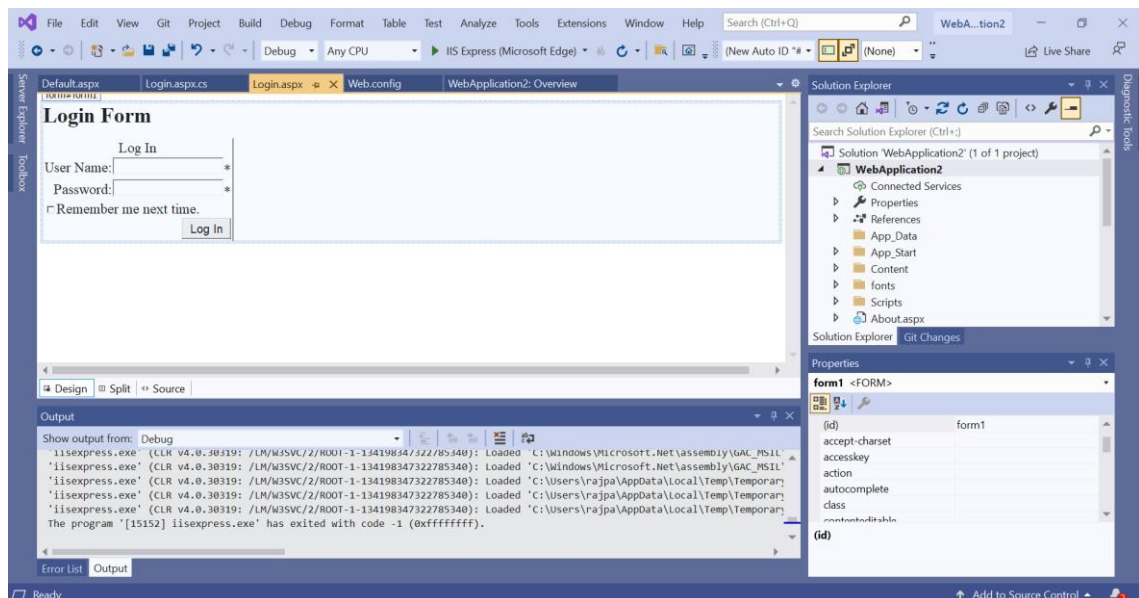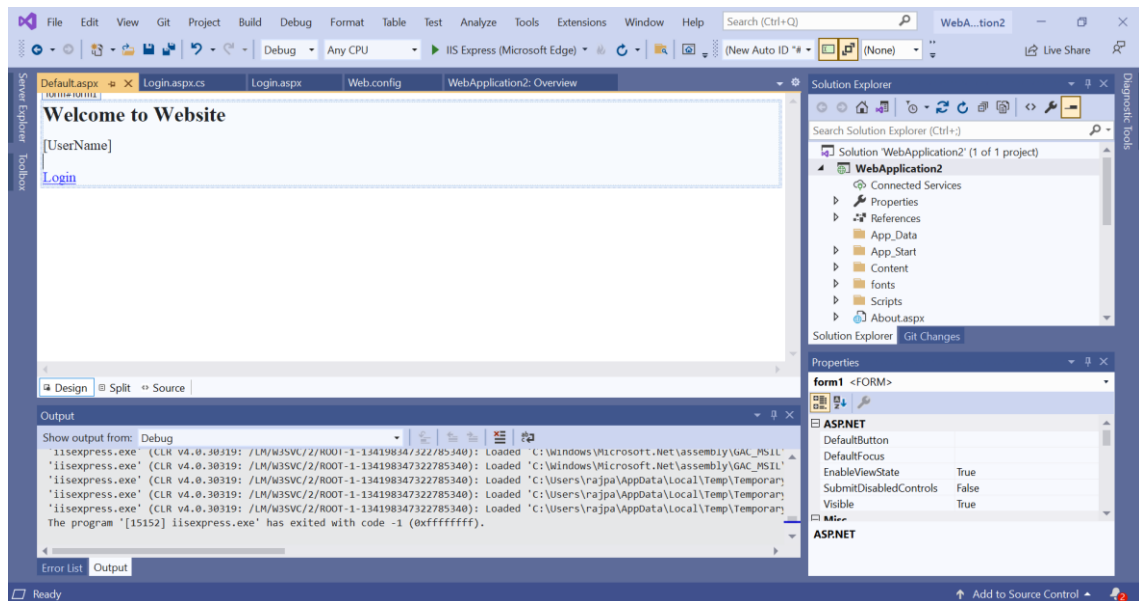

❖ OUTPUT

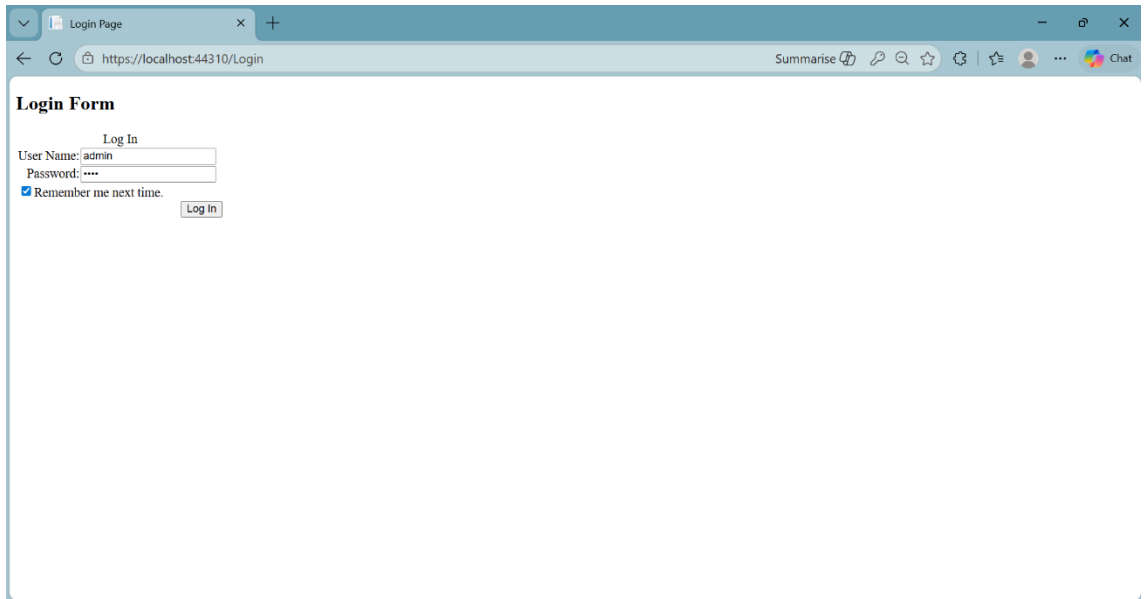

Login Page

https://localhost:44310/Login

Login Form


Log In

User Name: admin

Password:

☒ Remember me next time.

Log In

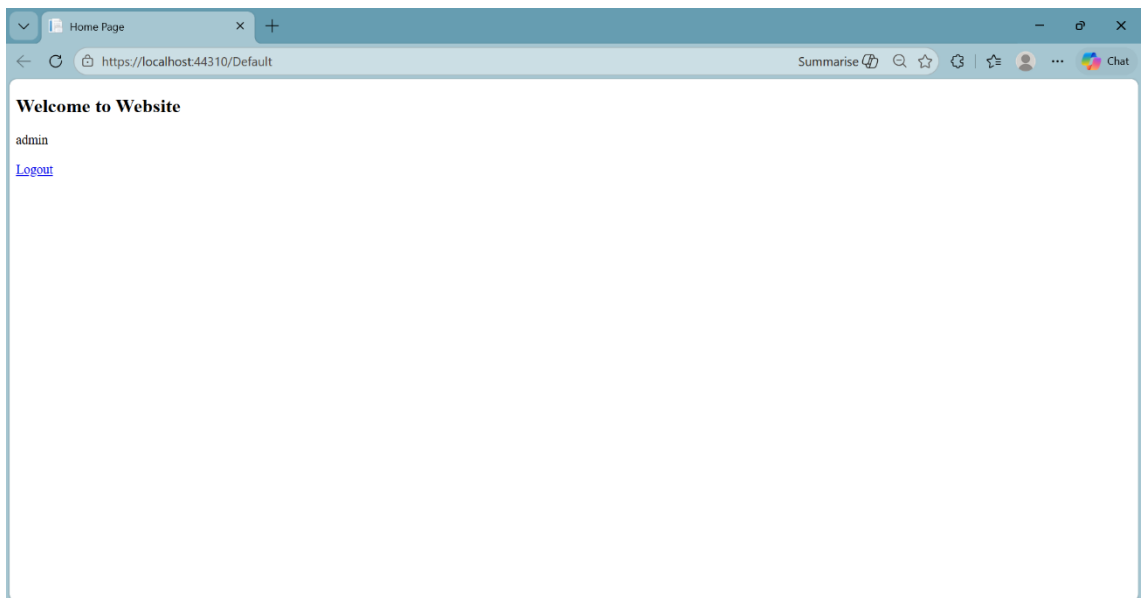

Home Page

https://localhost:44310/Default

Welcome to Website

admin

[Logout](#)

28. Design a dynamic website using all tools and controls.

❖ Site.Master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeBehind="Site.master.cs"
Inherits="WebApplication2.Site" %>

<!DOCTYPE html>
<html>
<head runat="server">
    <title>Dynamic Website</title>
</head>
<body>
    <form runat="server">
        <h1>My Dynamic Website</h1>

        <!-- Menu Control -->
        <asp:Menu ID="Menu1" runat="server" Orientation="Horizontal">
            <Items>
                <asp:MenuItem Text="Home" NavigateUrl="~/Default.aspx" />
                <asp:MenuItem Text="Register" NavigateUrl="~/Register.aspx" />
                <asp:MenuItem Text="Login" NavigateUrl="~/Login.aspx" />
            </Items>
        </asp:Menu>

        <hr />

        <!-- Content Area -->
        <asp:ContentPlaceHolder ID="ContentPlaceHolder1" runat="server" />

        <hr />

        <!-- Login Status -->
        <asp:LoginStatus ID="LoginStatus1" runat="server" LogoutAction="Redirect"
LogoutPageUrl="Login.aspx" />

        <asp:SiteMapPath ID="SiteMapPath1" runat="server"></asp:SiteMapPath>
    </form>
</body>
</html>
```

❖ Default.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site.Master"
AutoEventWireup="true" CodeBehind="Default.aspx.cs"
Inherits="WebApplication2.Default" %>
<asp:Content ContentPlaceHolderID="ContentPlaceHolder1" runat="server">
    <h2>Welcome to Dynamic Website</h2>
</asp:Content>
```

❖ Login.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace WebApplication2
{
    public partial class Login : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Login1_Authenticate(object sender, AuthenticateEventArgs e)
        {
            if (Login1.UserName == "admin" && Login1.Password == "123")
            {
                e.Authenticated = true;
            }
            else
            {
                e.Authenticated = false;
            }
        }
    }
}
```

❖ Users.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Data.SqlClient;

namespace WebApplication2
{
    public partial class Users : System.Web.UI.Page
    {
        string conStr = "your connection string";
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
```

```

    {
        BindGrid();
    }
}

void BindGrid()
{
    SqlConnection con = new SqlConnection(conStr);
    SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Users", con);
    DataTable dt = new DataTable();
    da.Fill(dt);
    GridView1.DataSource = dt;
    GridView1.DataBind();
}

protected void GridView1_SelectedIndexChanged(object sender, EventArgs e)
{
}
}
}

```


❖ Web.sitemap



```

<?xml version="1.0" encoding="utf-8" ?>
<siteMap>
    <siteMapNode title="Home" url="Default.aspx">
        <siteMapNode title="Register" url="Register.aspx" />
        <siteMapNode title="Users" url="Users.aspx" />
    </siteMapNode>
</siteMap>


```

❖ DESIGN PAGE



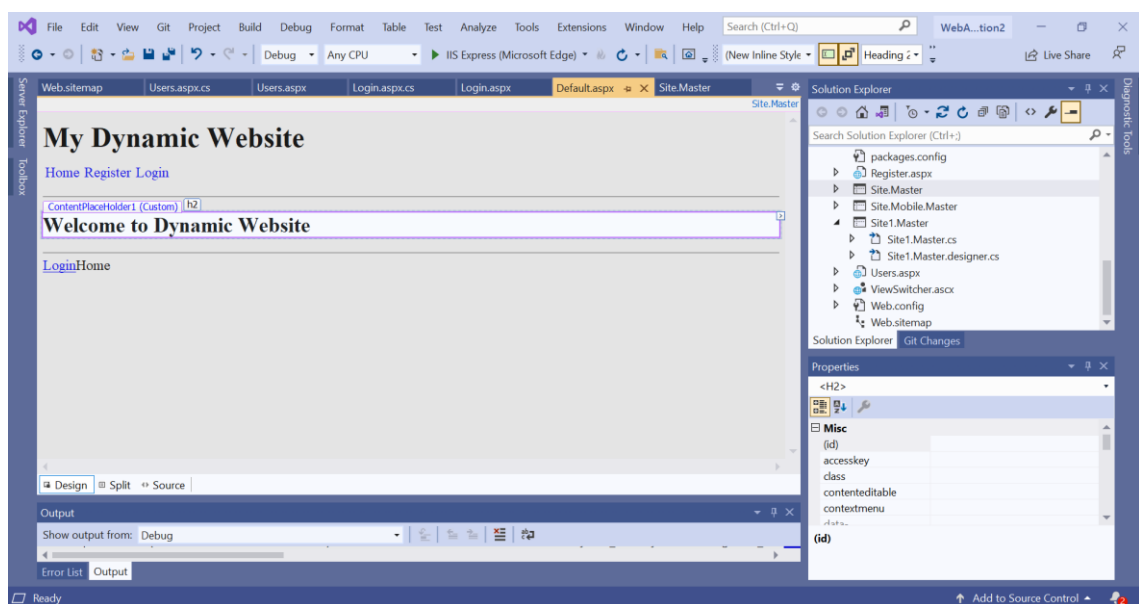


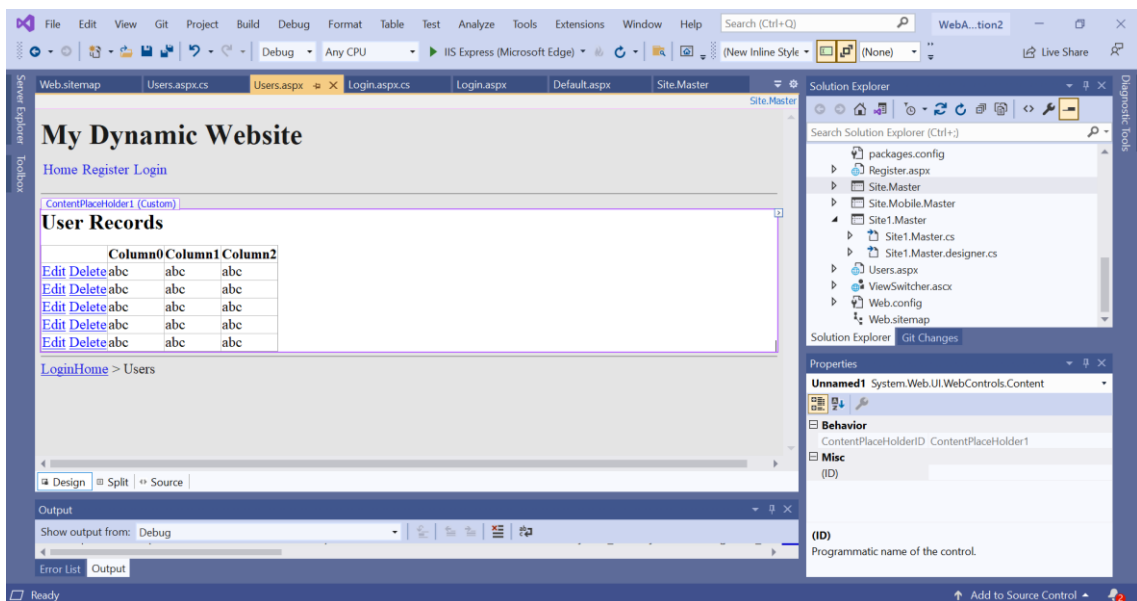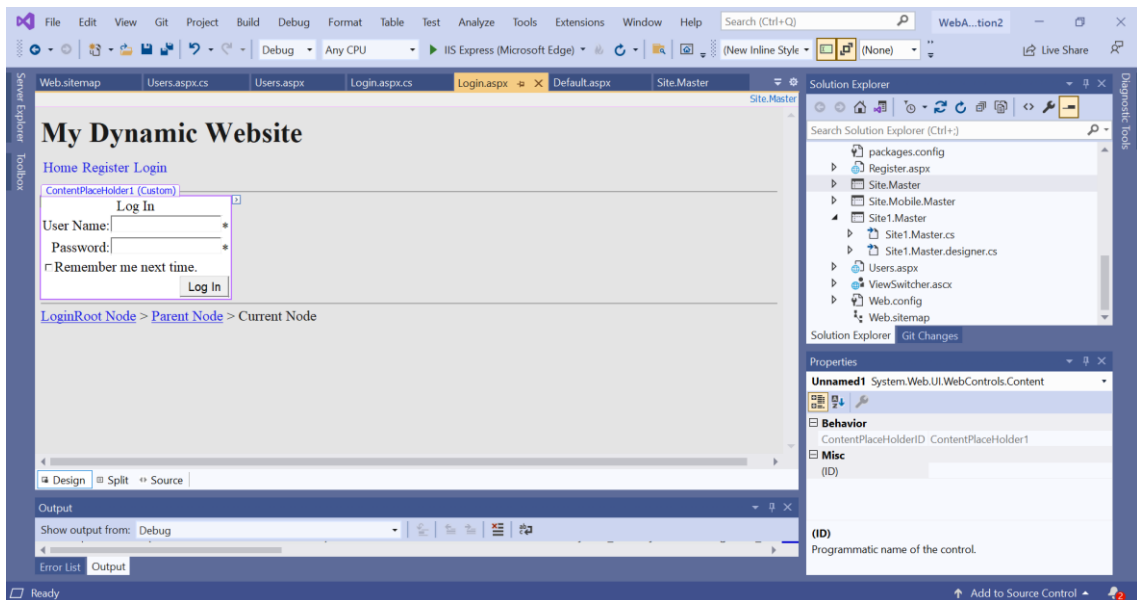

❖ SQL PAGE

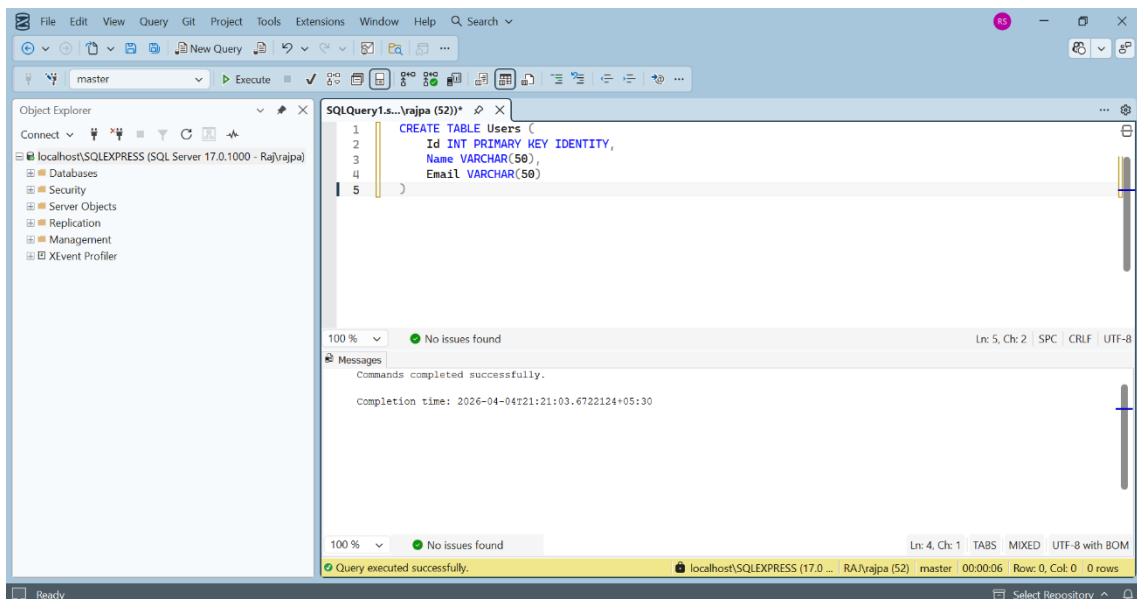

❖ OUTPUT

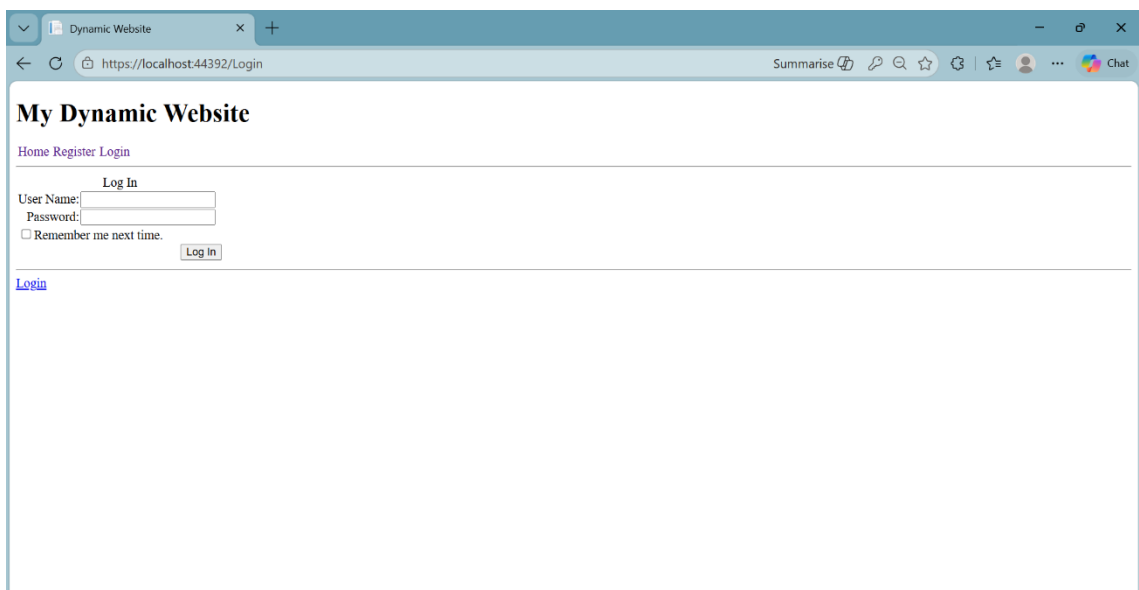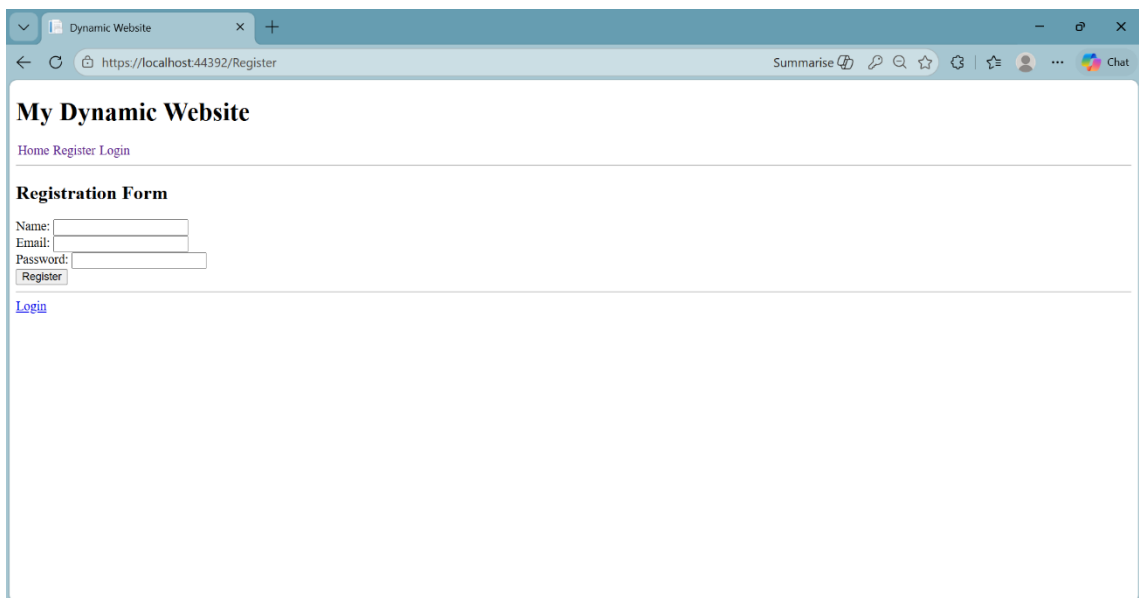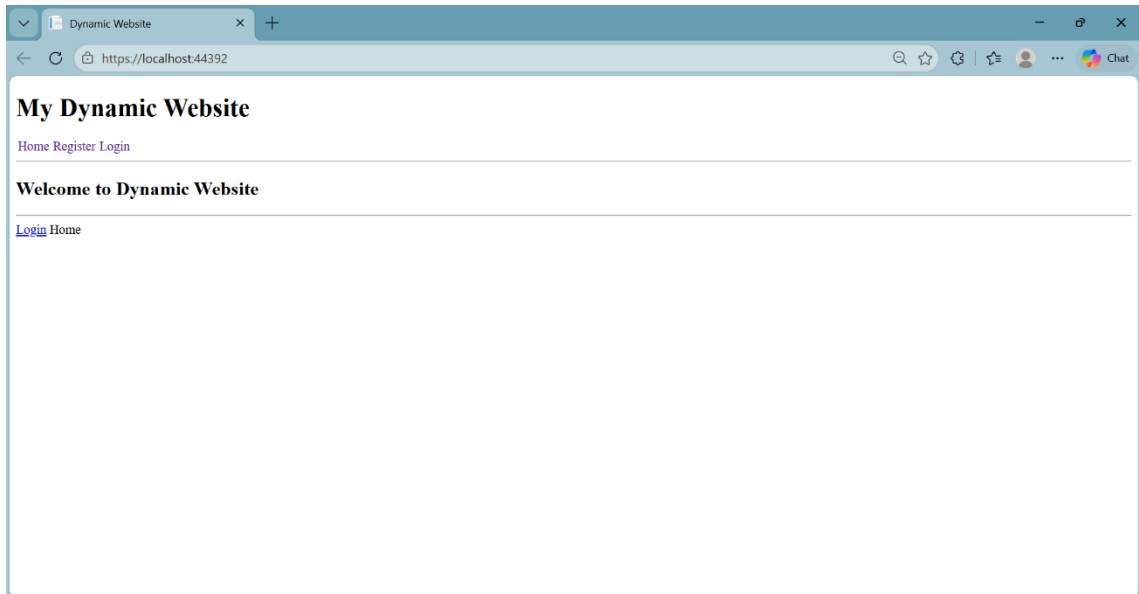


29. Write an ASP.NET program to demonstrate Repeater Control.


❖ Default.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Data;
using System.Data.SqlClient;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _29_Repeater_Control
{
    public partial class RepeaterDemo : System.Web.UI.Page
    {
        SqlConnection con = new SqlConnection("Data
Source=JUNAID\\SQLEXPRESS;Initial Catalog=StudentDB;Integrated Security=True");
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                BindData();
            }
        }
        void BindData()
        {
            SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Student", con);
            DataTable dt = new DataTable();
            da.Fill(dt); Repeater1.DataSource = dt; Repeater1.DataBind();
        }
    }
}
```

❖ DESIGN PAGE

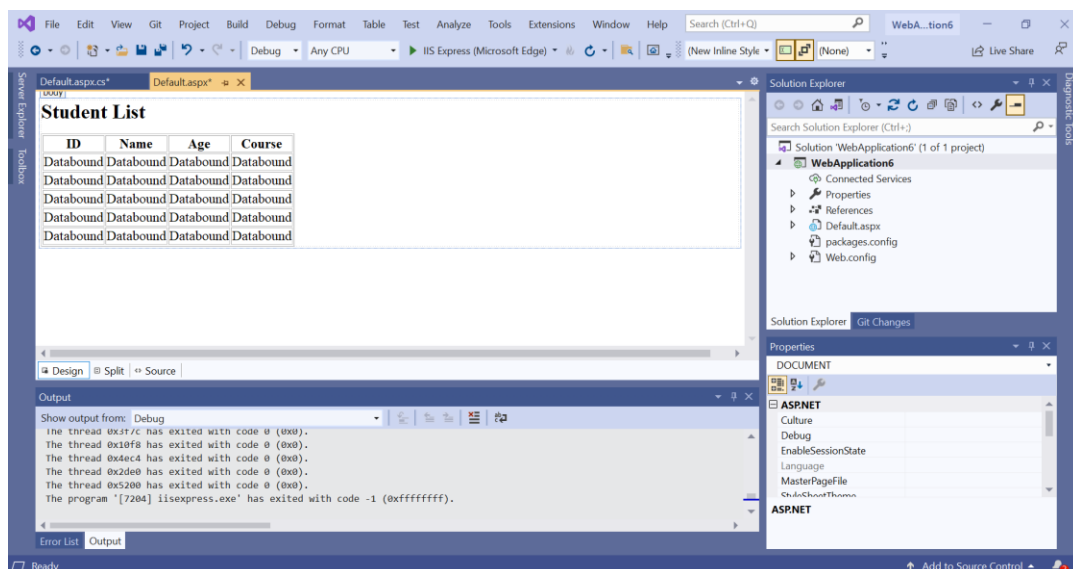

❖ OUTPUT

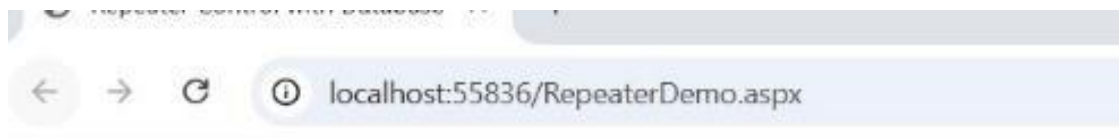

Student List

ID	Name	Age	Course
3	Zara	22	MCA
4	Sara	20	BSC-AIML
1002	Sakshi	20	MCA

30. Write an ASP.NET program to demonstrate Form View control.

❖ FormViewDemo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="FormViewDemo.aspx.cs" Inherits="WebApplication5.FormViewDemo" %>

<!DOCTYPE html>
<html>
<head runat="server">
    <title>FormView Demo</title>
</head>
<body>
<form id="form1" runat="server">

    <h2>Student Details</h2>

    <asp:FormView ID="FormView1" runat="server" DataKeyNames="ID"
DataSourceID="SqlDataSource1"
OnPageIndexChanging="FormView1_PageIndexChanging">

        <InsertItemTemplate>
            ID:
            <asp:TextBox ID="IDTextBox" runat="server" Text='<%# Bind("ID") %>' />
            <br />
            Name:
            <asp:TextBox ID="NameTextBox" runat="server" Text='<%# Bind("Name") %>' />
            <br />
            Course:
            <asp:TextBox ID="CourseTextBox" runat="server" Text='<%# Bind("Course") %>'
/>
            <br />
            Marks:
            <asp:TextBox ID="MarksTextBox" runat="server" Text='<%# Bind("Marks") %>' />
            <br />
            <asp:LinkButton ID="InsertButton" runat="server" CausesValidation="True"
CommandName="Insert" Text="Insert" />
            &nbsp;<asp:LinkButton ID="InsertCancelButton" runat="server"
CausesValidation="False" CommandName="Cancel" Text="Cancel" />
        </InsertItemTemplate>

        <ItemTemplate>
            ID:
            <asp:Label ID="IDLabel" runat="server" Text='<%# Eval("ID") %>' />
            <br />
            Name:
            <asp:Label ID="NameLabel" runat="server" Text='<%# Bind("Name") %>' />
            <br />
            Course:
```

```

        <asp:Label ID="CourseLabel" runat="server" Text='<%= Bind("Course") %>' />
        <br />
        Marks:
        <asp:Label ID="MarksLabel" runat="server" Text='<%= Bind("Marks") %>' />
        <br />
    </ItemTemplate>

    <EditItemTemplate>
        ID:
        <asp:Label ID="IDLabel1" runat="server" Text='<%= Eval("ID") %>' />
        <br />
        Name: <asp:TextBox ID="NameTextBox" runat="server" Text='<%= Bind("Name")
%>' /><br />
        Course: <asp:TextBox ID="CourseTextBox" runat="server" Text='<%=
Bind("Course") %>' /><br />
        Marks: <asp:TextBox ID="MarksTextBox" runat="server" Text='<%= Bind("Marks")
%>' /><br />
        <asp:LinkButton ID="UpdateButton" runat="server" CausesValidation="True"
CommandName="Update" Text="Update" />
        &nbsp;<asp:LinkButton ID="UpdateCancelButton" runat="server"
CausesValidation="False" CommandName="Cancel" Text="Cancel" />
    </EditItemTemplate>


</asp:FormView>

    <asp:SqlDataSource ID="SqlDataSource1" runat="server" ConnectionString="<%=
ConnectionString:StudentDBConnectionString %>" SelectCommand="SELECT * FROM
[Students]"></asp:SqlDataSource>

</form>
</body>
</html>

```

❖ DESIGN PAGE

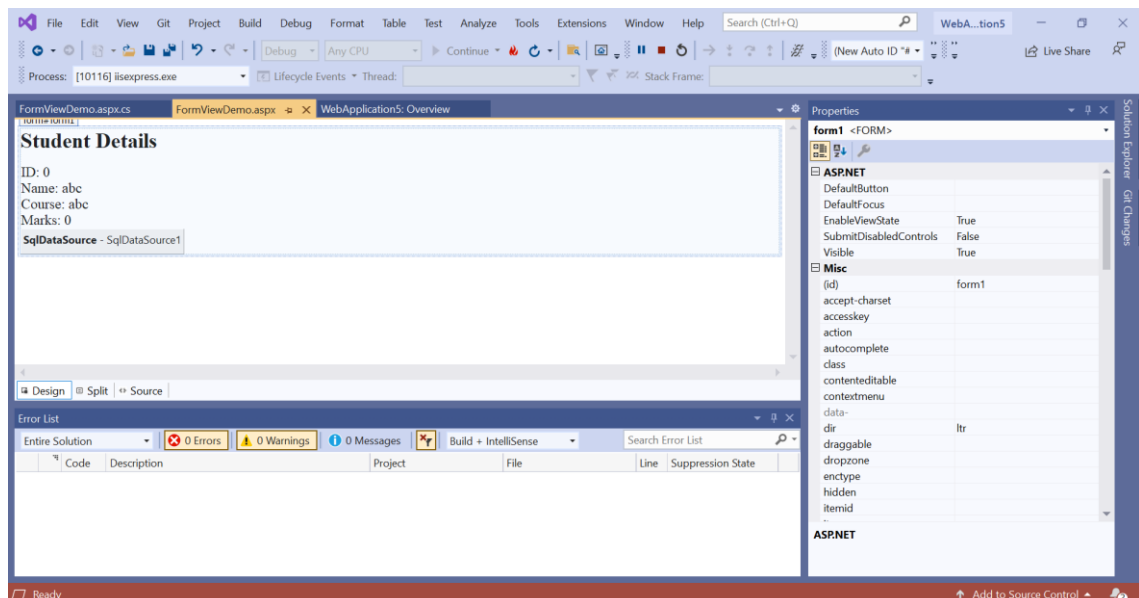

❖ OUTPUT

