


The JOIN operation

Language: English • 日本語 • 中文

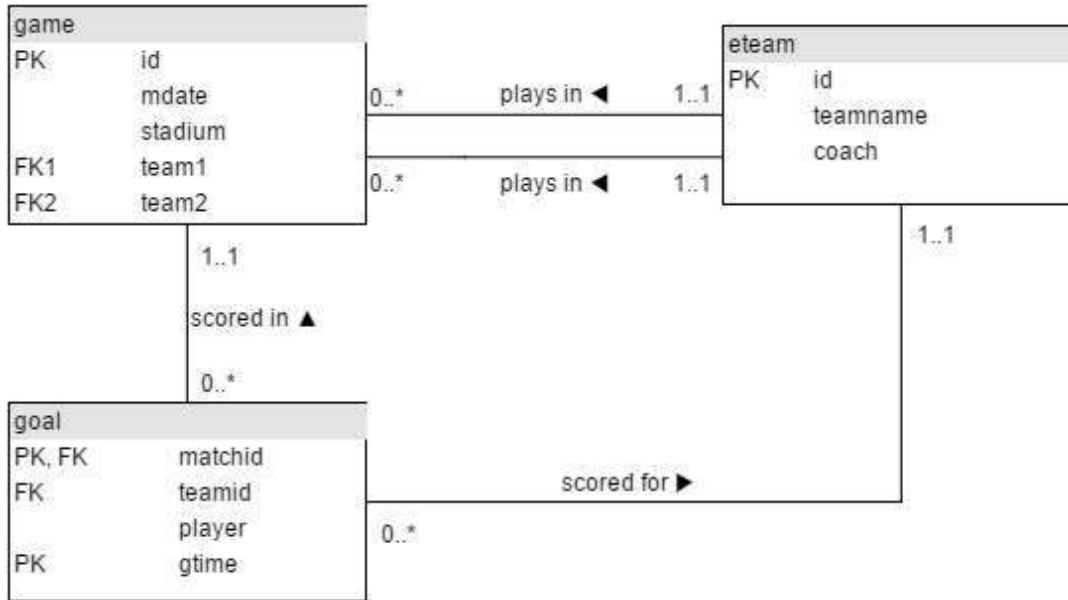

game

id	mdate	stadium	team1	team2
1001	8 June 2012	National Stadium, Warsaw	POL	GRE
1002	8 June 2012	Stadion Miejski (Wroclaw)	RUS	CZE
1003	12 June 2012	Stadion Miejski (Wroclaw)	GRE	CZE
1004	12 June 2012	National Stadium, Warsaw	POL	RUS
...				

goal

matchid	teamid	player	gtime
1001	POL	Robert Lewandowski	17
1001	GRE	Dimitris Salpingidis	51
1002	RUS	Alan Dzagoev	15
1002	RUS	Roman Pavlyuchenko	82
...			

eteam

id	teamname	coach
----	----------	-------

POL	Poland	Franciszek Smuda
RUS	Russia	Dick Advocaat
CZE	Czech Republic	Michal Bilek
GRE	Greece	Fernando Santos
...		

This tutorial introduces JOIN which allows you to use data from two or more tables. The tables contain all matches and goals from UEFA EURO 2012 Football Championship in Poland and Ukraine.

The data is available (mysql format) at <http://sqlzoo.net/euro2012.sql>

Summary

Contents

- 1 Bender goals
- 2 Team names
- 3 JOIN
- 4 Mario goals
- 5 Early goals
- 6 Fernando Santos
- 7 Games in Warsaw
- 8 Who scored against Germany
- 9 Total goals scored
- 10 Goals by stadium
- 11 Poland's games
- 12 Germany scores
- 13 All scores
- 14 What next?

1.

Bender goals

The first example shows the goal scored by a player with the last name 'Bender'. The * says to list all the columns in the table - a shorter way of saying `matchid, teamid, player, gtime`

Modify it to show the *matchid* and *player* name for all goals scored by Germany. To identify German players, check for: `teamid = 'GER'`

```
SELECT matchid, player FROM goal
WHERE teamid='GER';
```

[Submit SQL](#)[restore default](#)

Correct answer

matchid	player
1008	Mario Gómez
1010	Mario Gómez
1010	Mario Gómez
1012	Lukas Podolski
1012	Lars Bender
1026	Philipp Lahm
1026	Sami Khedira
1026	Philipp Lahm

2.

Team names

From the previous query you can see that Lars Bender's scored a goal in game 1012. Now we want to know what teams were playing in that match.

Notice in the that the column `matchid` in the `goal` table corresponds to the `id` column in the `game` table. We can look up information about game 1012 by finding that row in the **game** table.

Show id, stadium, team1, team2 for just game 1012

```
SELECT id,stadium,team1,team2
FROM game WHERE id=1012;
```

[Submit SQL](#)[restore default](#)

Correct answer

id	stadium	team1	team2
1012	Arena Lviv	DEN	GER

3. JOIN

You can combine the two steps into a single query with a JOIN.

```
SELECT *
FROM game JOIN goal ON (id=matchid)
```

The **FROM** clause says to merge data from the goal table with that from the game table. The **ON** says how to figure out which rows in **game** go with which rows in **goal** - the **matchid** from **goal** must match **id** from **game**. (If we wanted to be more clear/specific we could say `ON (game.id=goal.matchid)`)

The code below shows the player (from the goal) and stadium name (from the game table) for every goal scored.

Modify it to show the player, teamid, stadium and mdate for every German goal.

```
SELECT g.player, g.teamid, gg.stadium, gg.mdate from goal as g join game as gg ON gg.id=g.matchid  
where g.teamid='GER';
```

[Submit SQL](#)[restore default](#)

Correct answer

player	teamid	stadium	mdate
Mario Gómez	GER	Arena Lviv	9 June 2012
Mario Gómez	GER	Metalist Stadium	13 June 2012
Mario Gómez	GER	Metalist Stadium	13 June 2012
Lukas Podolski	GER	Arena Lviv	17 June 2012
Lars Bender	GER	Arena Lviv	17 June 2012
Philipp Lahm	GER	PGE Arena Gdansk	22 June 2012
Sami Khedira	GER	PGE Arena Gdansk	22 June 2012
Miroslav Klose	GER	PGE Arena Gdansk	22 June 2012
Marco Reus	GER	PGE Arena Gdansk	22 June 2012
Mesut Özil	GER	National Stadium, Warsaw	28 June 2012

4.

Mario goals

Use the same JOIN as in the previous question.

Show the team1, team2 and player for every goal scored by a player called Mario player LIKE 'Mario%'

```
select gg.team1, gg.team2, g.player from game as gg join goal as g ON gg.id=g.matchid WHERE player LIKE 'Mario%';
```

[Submit SQL](#)[restore default](#)

Correct answer

team1	team2	player
GER	POR	Mario Gómez
NED	GER	Mario Gómez
NED	GER	Mario Gómez
IRL	CRO	Mario Mandžukic
IRL	CRO	Mario Mandžukic
ITA	CRO	Mario Mandžukic
ITA	IRL	Mario Balotelli
GER	ITA	Mario Balotelli
GER	ITA	Mario Balotelli

5.

Early goals

The table eteam gives details of every national team including the coach. You can JOIN goal to eteam using the phrase goal JOIN eteam on teamid=id

Show player, teamid, coach, gtime for all goals scored in the first 10 minutes gtime<=10

```
SELECT g.player, g.teamid, e.coach, g.gtime
FROM goal as g join eteam as e ON g.teamid=e.id
WHERE g.gtime<=10;
```

[Submit SQL](#)[restore default](#)

Correct answer

player	teamid	coach	gtime
Petr Jiráček	CZE	Michal Bílek	3
Václav Pilar	CZE	Michal Bílek	6
Mario Mandžukic	CRO	Slaven Bilic	3
Fernando Torres	ESP	Vicente del Bosque	4

6.

Fernando Santos

To JOIN game with eteam you could use either
game JOIN eteam ON (team1=eteam.id) or game JOIN eteam ON (team2=eteam.id)

Notice that because id is a column name in both game and eteam you must specify eteam.id instead of just id

List the dates of the matches and the name of the team in which 'Fernando Santos' was the team1 coach.

```
select gg.mdate, e.teamname from game as gg join eteam as e ON  
gg.team1=e.id where e.coach='fernando santos';
```

[Submit SQL](#)[restore default](#)

Correct answer

mdate	teamname
12 June 2012	Greece
16 June 2012	Greece

7.

Games in Warsaw

List the player for every goal scored in a game where the stadium was 'National Stadium, Warsaw'

```
select g.player from goal as g join game as gg ON g.matchid=gg.id where gg.stadium='National Stadium,  
warsaw';
```

[Submit SQL](#)[restore default](#)

Correct answer

player
Robert Lewandowski
Dimitris Salpingidis
Alan Dzagoev
Jakub Blaszczykowski
Giorgos Karagounis
Cristiano Ronaldo
Mario Balotelli
Mario Balotelli
Mesut Özil

More difficult questions

8.

Who scored against Germany

The example query shows all goals scored in the Germany-Greece quarterfinal.

Instead show the name of all players who scored a goal against Germany.

HINT

Select goals scored only by non-German players in matches where GER was the id of either **team1** or **team2**.

You can use `teamid != 'GER'` to prevent listing German players.

You can use `DISTINCT` to stop players being listed twice.

```
SELECT distinct(player)
FROM game JOIN goal ON matchid = id
WHERE (team1='GER' OR team2='GER') and teamid!='GER';
```

Submit SQL

restore default

Correct answer

player
Robin van Persie
Michael Krohn-Dehli
Georgios Samaras
Dimitris Salpingidis
Mario Balotelli

9.

Total goals scored

Show teamname and the total number of goals scored.

COUNT and GROUP BY

```
SELECT teamname, count(teamid)
FROM eteam JOIN goal ON id=teamid
group by teamname;
```

[Submit SQL](#)[restore default](#)

Correct answer

teamname	count(teamid)
Croatia	4
Czech Republic	4
Denmark	4
England	5
France	3
Germany	10
Greece	5
Italy	6

1.

Goals by stadium

Show the stadium and the number of goals scored in each stadium.

```
select stadium, count(teamid) from game join goal on id=matchid
group by stadium;
```

[Submit SQL](#)[restore default](#)

Correct answer

stadium	count(teamid)
Arena Lviv	9
Donbass Arena	7
Metalist Stadium	7
National Stadium, Warsaw	9
Olimpiyskiy National Sports Complex	14
PGE Arena Gdansk	13
Stadion Miejski (Poznan)	8
Stadion Miejski (Wroclaw)	9

1 ..

Poland's games

For every match involving 'POL', show the matchid, date and the number of goals scored.

```
SELECT matchid,mdate, count(teamid)
FROM game JOIN goal ON matchid = id
WHERE (team1 = 'POL' OR team2 = 'POL') group by matchid, mdate;
```

Submit SQL

restore default

Correct answer

matchid	mdate	count(teamid)
1001	8 June 2012	2

1004	12 June 2012	2
1005	16 June 2012	1

1.

Germany scores

For every match where 'GER' scored, show matchid, match date and the number of goals scored by 'GER'

```
SELECT matchid,mdate, count(teamid)
  FROM game LEFT JOIN goal ON matchid = id
 WHERE (team1 = 'GER' OR team2 = 'GER') and teamid='ger' group by matchid, mdate;
```

Submit SQL

restore default

Correct answer

matchid	mdate	count(teamid)
1008	9 June 2012	1
1010	13 June 2012	2
1012	17 June 2012	2
1026	22 June 2012	4
1030	28 June 2012	1

1.

All scores

List every match involving the ENG team, show the number goals scored by each team as shown. This will use "CASE WHEN" which has not been explained in any previous exercises.

mdate	team1	score1	team2	score2
11 June 2012	FRA	1	ENG	1
15 June 2012	SWE	2	ENG	3
19 June 2012	ENG	1	UKR	0
24 June 2012	ENG	0	ITA	0

Notice in the query given every goal is listed. If it was a team1 goal then a 1 appears in score1, otherwise there is a 0. You could SUM this column to get a count of the goals scored by team1. **Sort your result by mdate, matchid, team1 and team2.**

```
SELECT mdate,
       team1,
       SUM(CASE WHEN teamid = team1 THEN 1 ELSE 0 END) AS score1,
       team2,
       SUM(CASE WHEN teamid = team2 THEN 1 ELSE 0 END) AS score2
FROM game
LEFT JOIN goal ON matchid = id
WHERE team1 = 'ENG' OR team2 = 'ENG'
GROUP BY mdate, matchid, team1, team2;
```

Submit SQL

restore default

Correct answer

mdate	team1	score1	team2	score2
11 June 2012	FRA	1	ENG	1
15 June 2012	SWE	2	ENG	3
19 June 2012	ENG	1	UKR	0
24 June 2012	ENG	0	ITA	0

What next?

[JOIN Quiz](#)

[Old JOIN Tutorial](#)

More JOIN operations: The next tutorial about the Movie database involves some slightly more complicated joins from the movie database.

Retrieved from "https://sqlzoo.net/w/index.php?title=The_JOIN_operation&oldid=40891"



The banner for 'Master SQL' features a blue robot character on the left. The text 'Master SQL' is prominently displayed in the center. Below it, the text 'Free, interactive lessons for total beginners' is shown. Further down, it says 'Join 4M+ learners'. A blue button with the text 'START FREE →' is positioned below the text. On the right side of the banner, there is a dark-themed code editor window titled 'query.sql' containing the following SQL query:

```
SELECT name
FROM learners
WHERE course = 'SQL';
```