new*

```cpp
#include <iostream>
using namespace std;

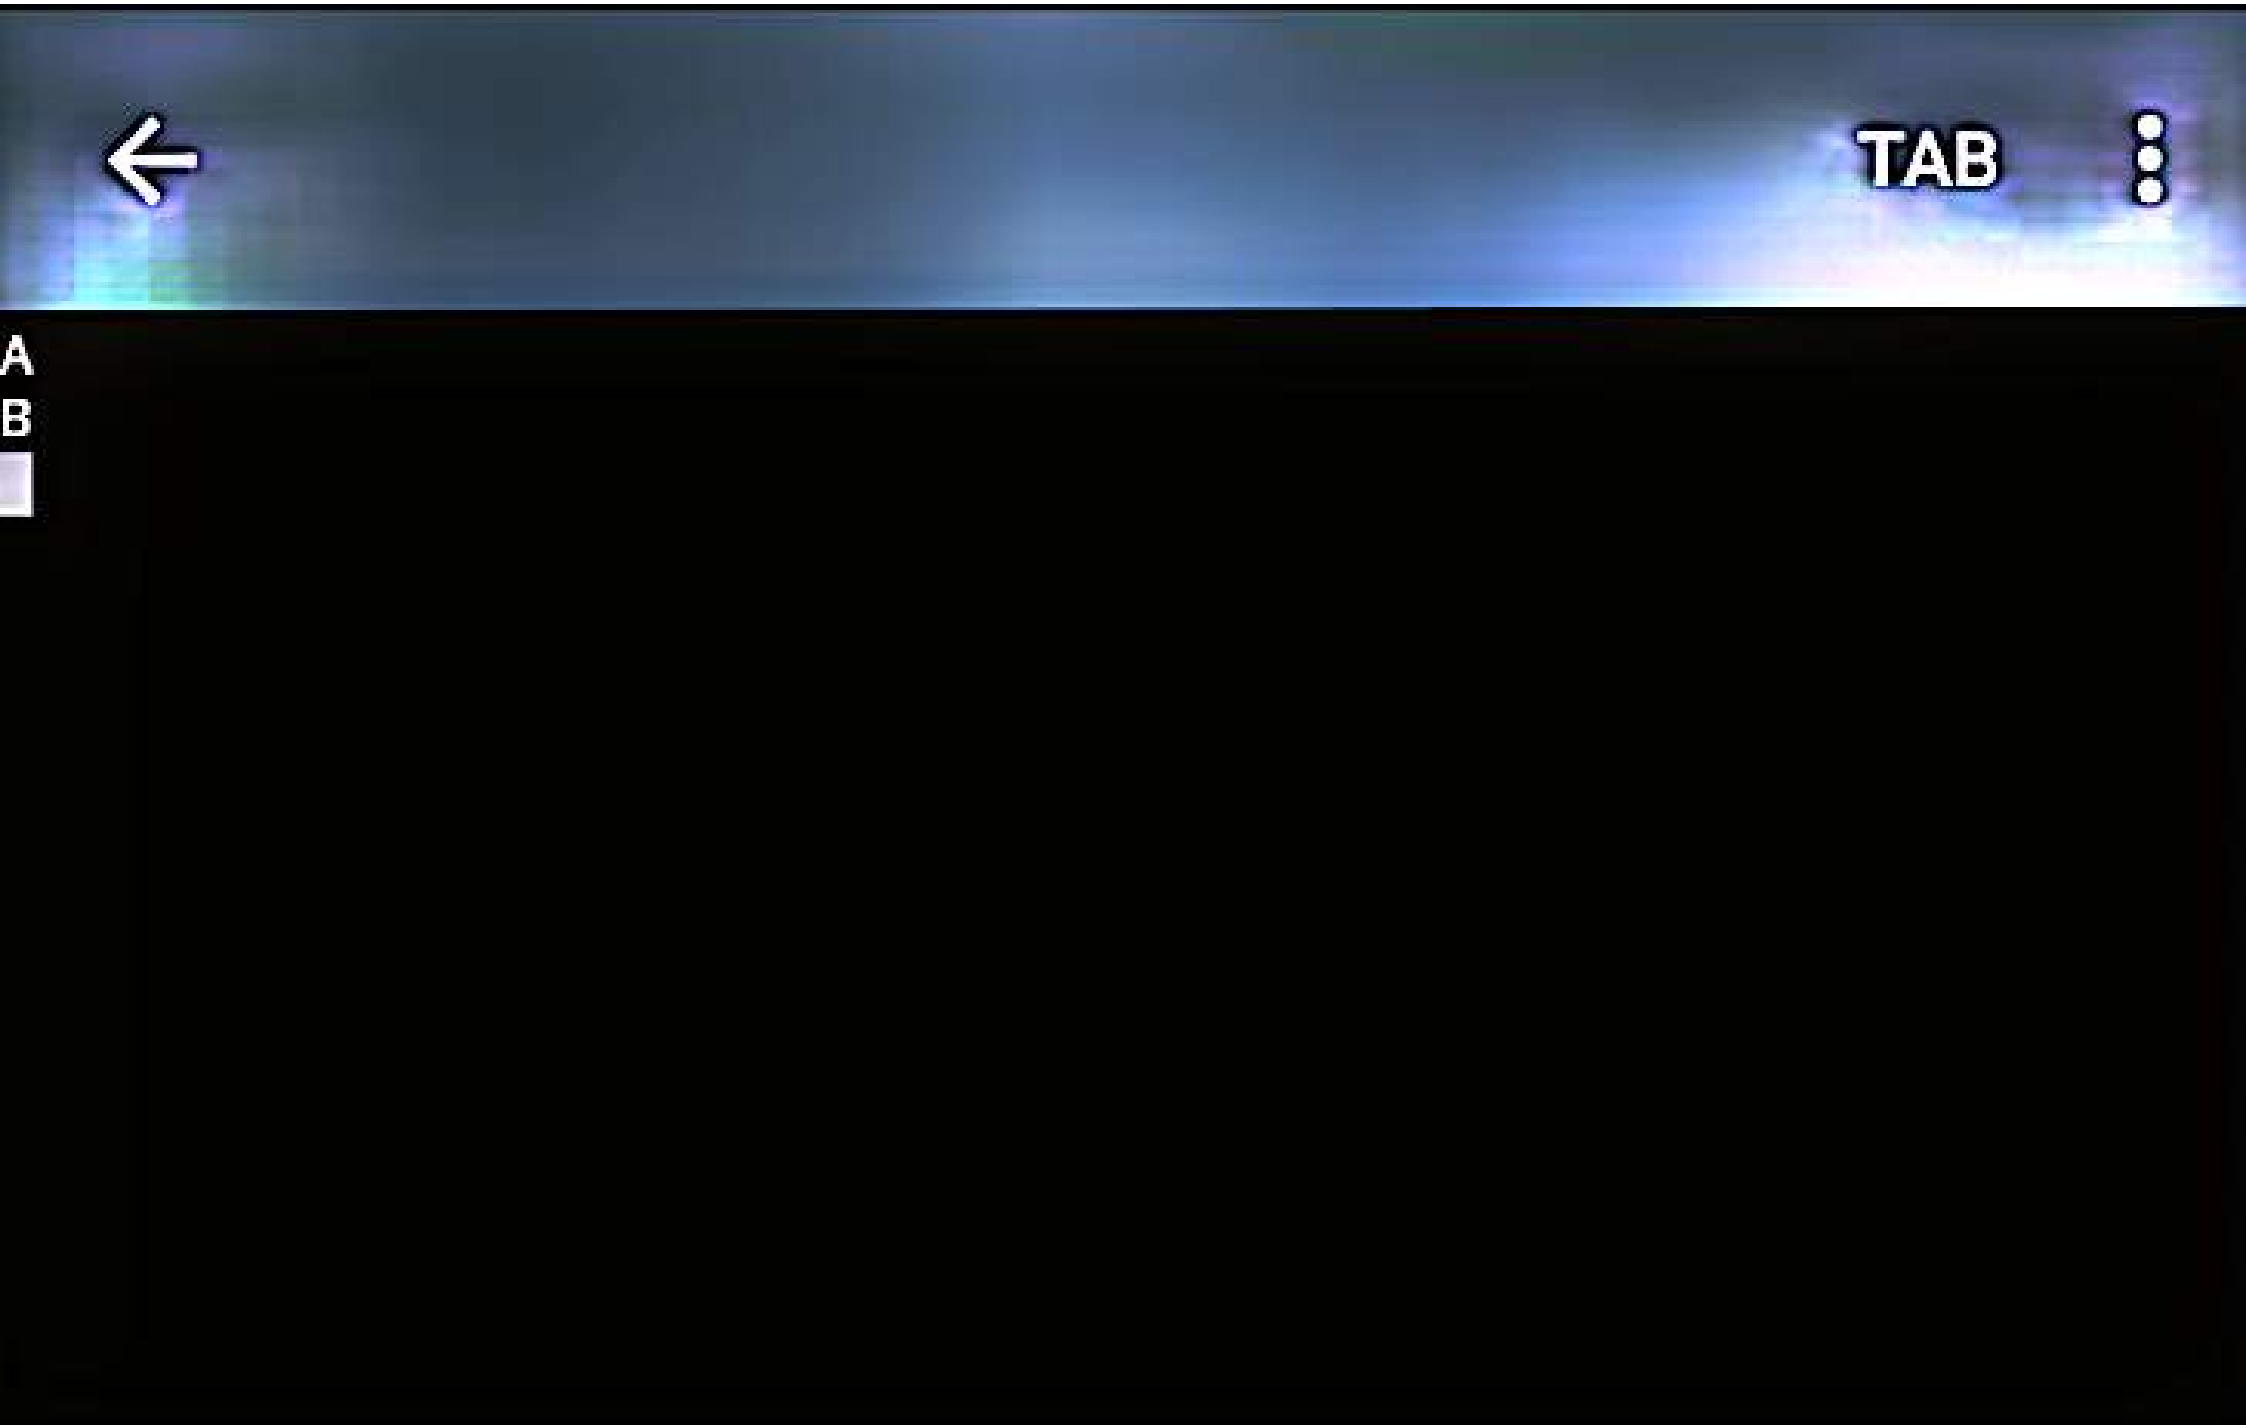
int main()
{
    char letter;
    letter = 'A';
    cout << letter << "\n";

    letter = 'B';
    cout << letter << "\n";

    cin >> letter;

    return 0;
}
```

CamScanner



CamScanner

new*

```cpp
#include <iostream>
using namespace std;

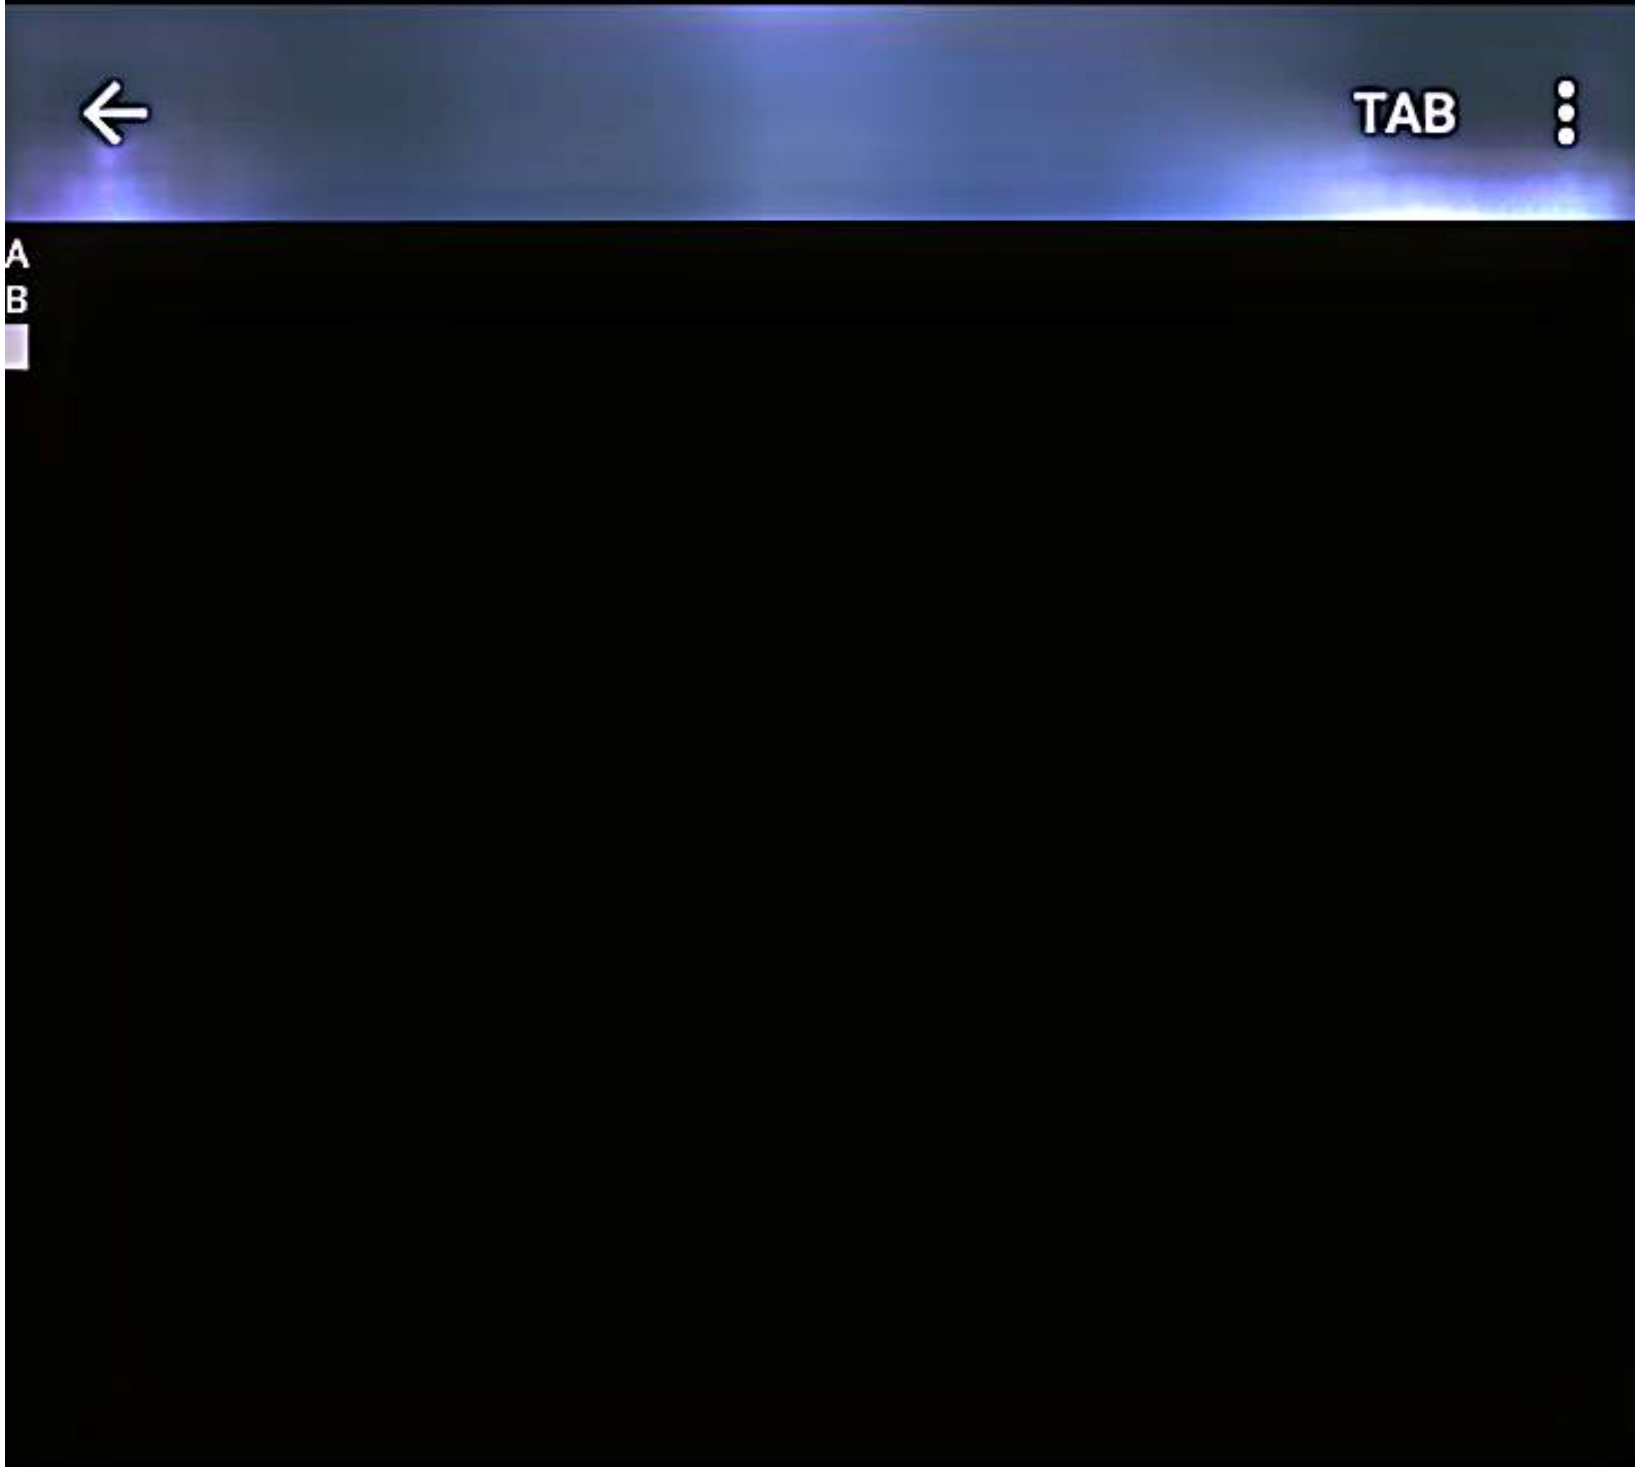
int main()
{
    char letter;
    letter = 65;
    cout << letter << '\n';

    letter = 66;
    cout << letter << '\n';

    cin >> letter;

    return 0;
}
```

CamScanner



CamScanner

new*

```cpp
#include <iostream>
using namespace std;

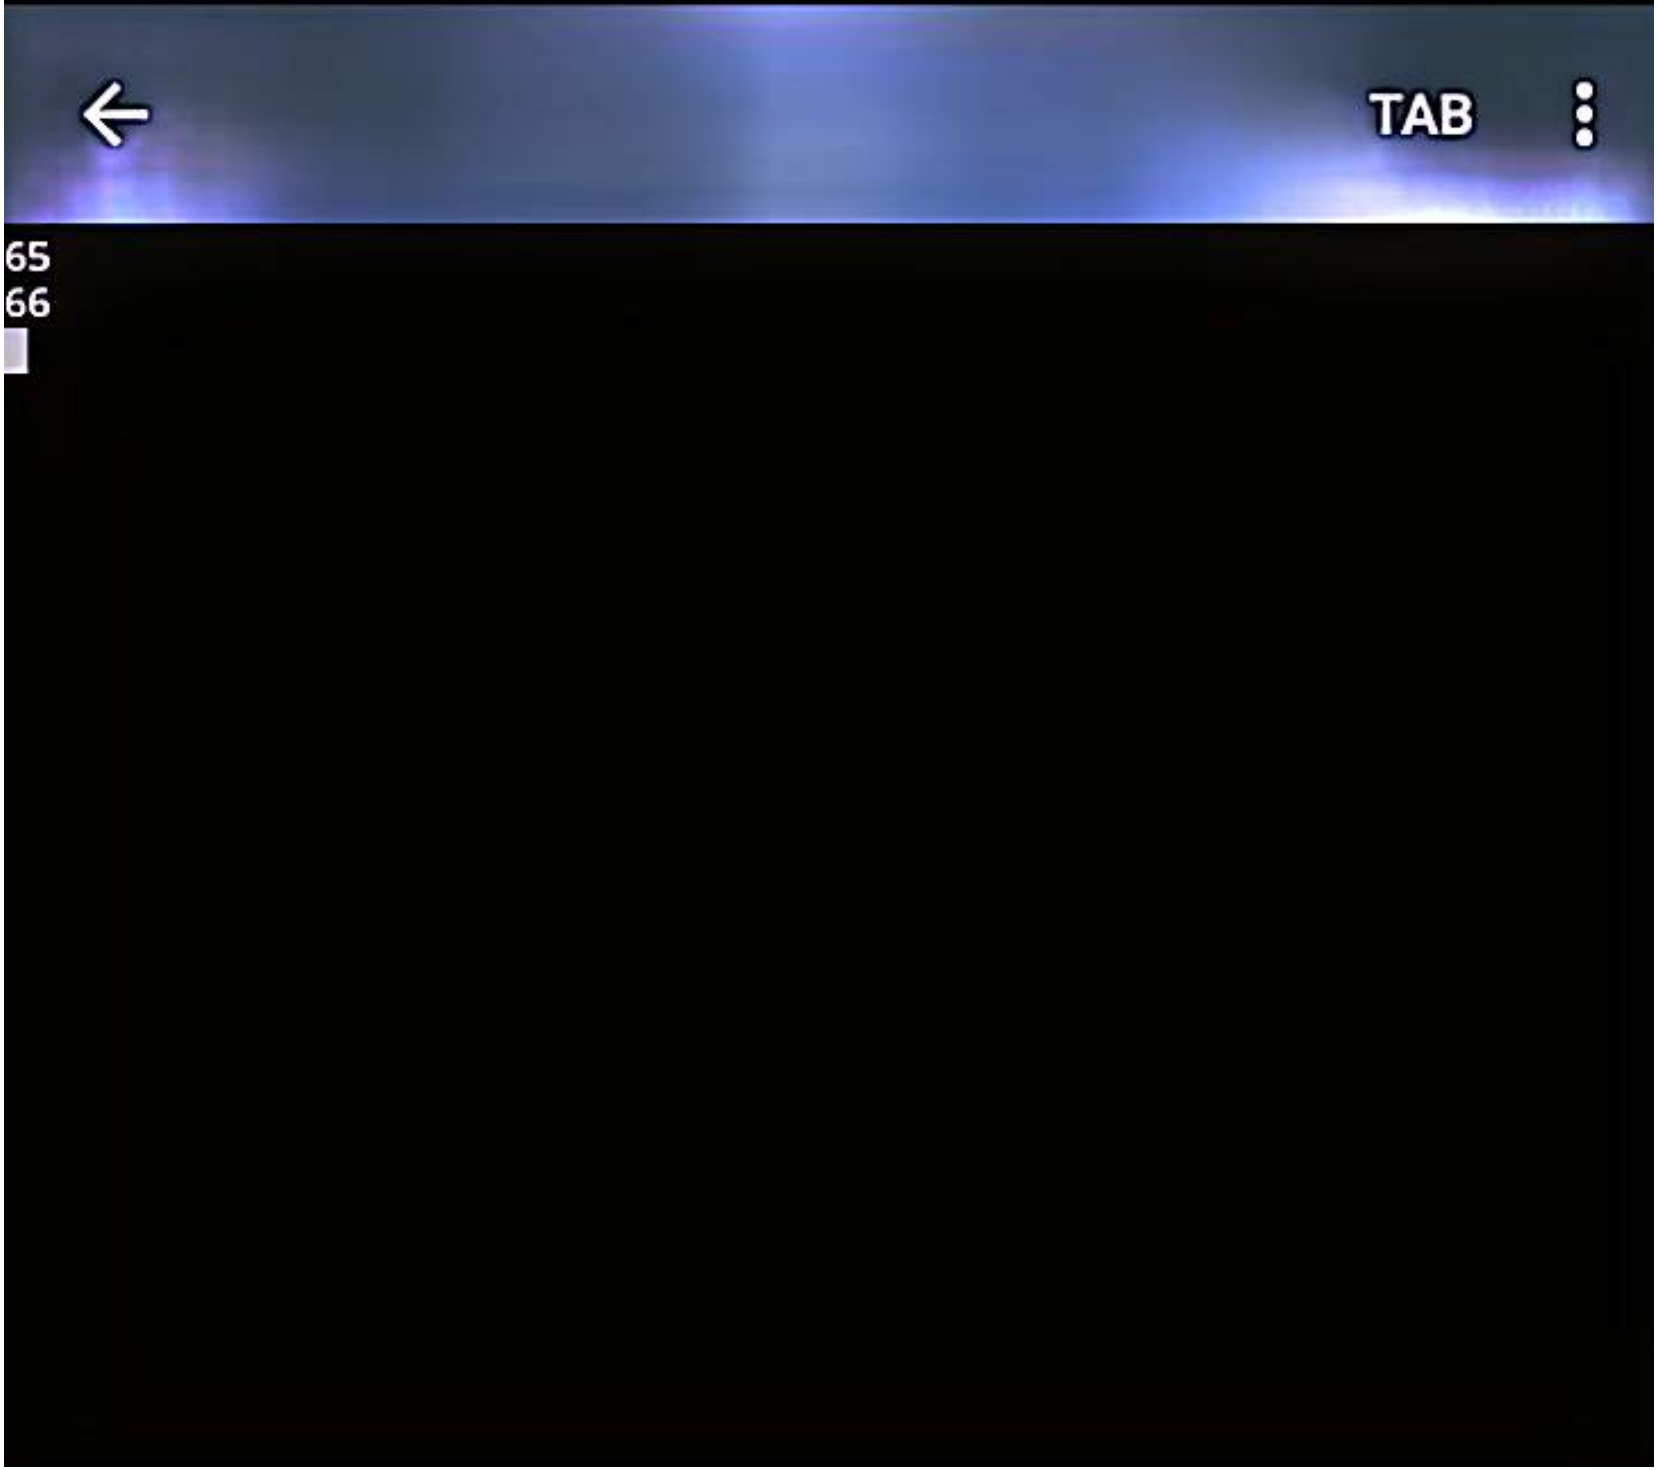
int main()
{
    int letter;
    letter = 'A';
    cout << letter << '\n';

    letter = 'B';
    cout << letter << '\n';

    cin >> letter;

    return 0;
}
```

CamScanner



CamScanner

new*

```cpp
#include <iostream>
using namespace std;

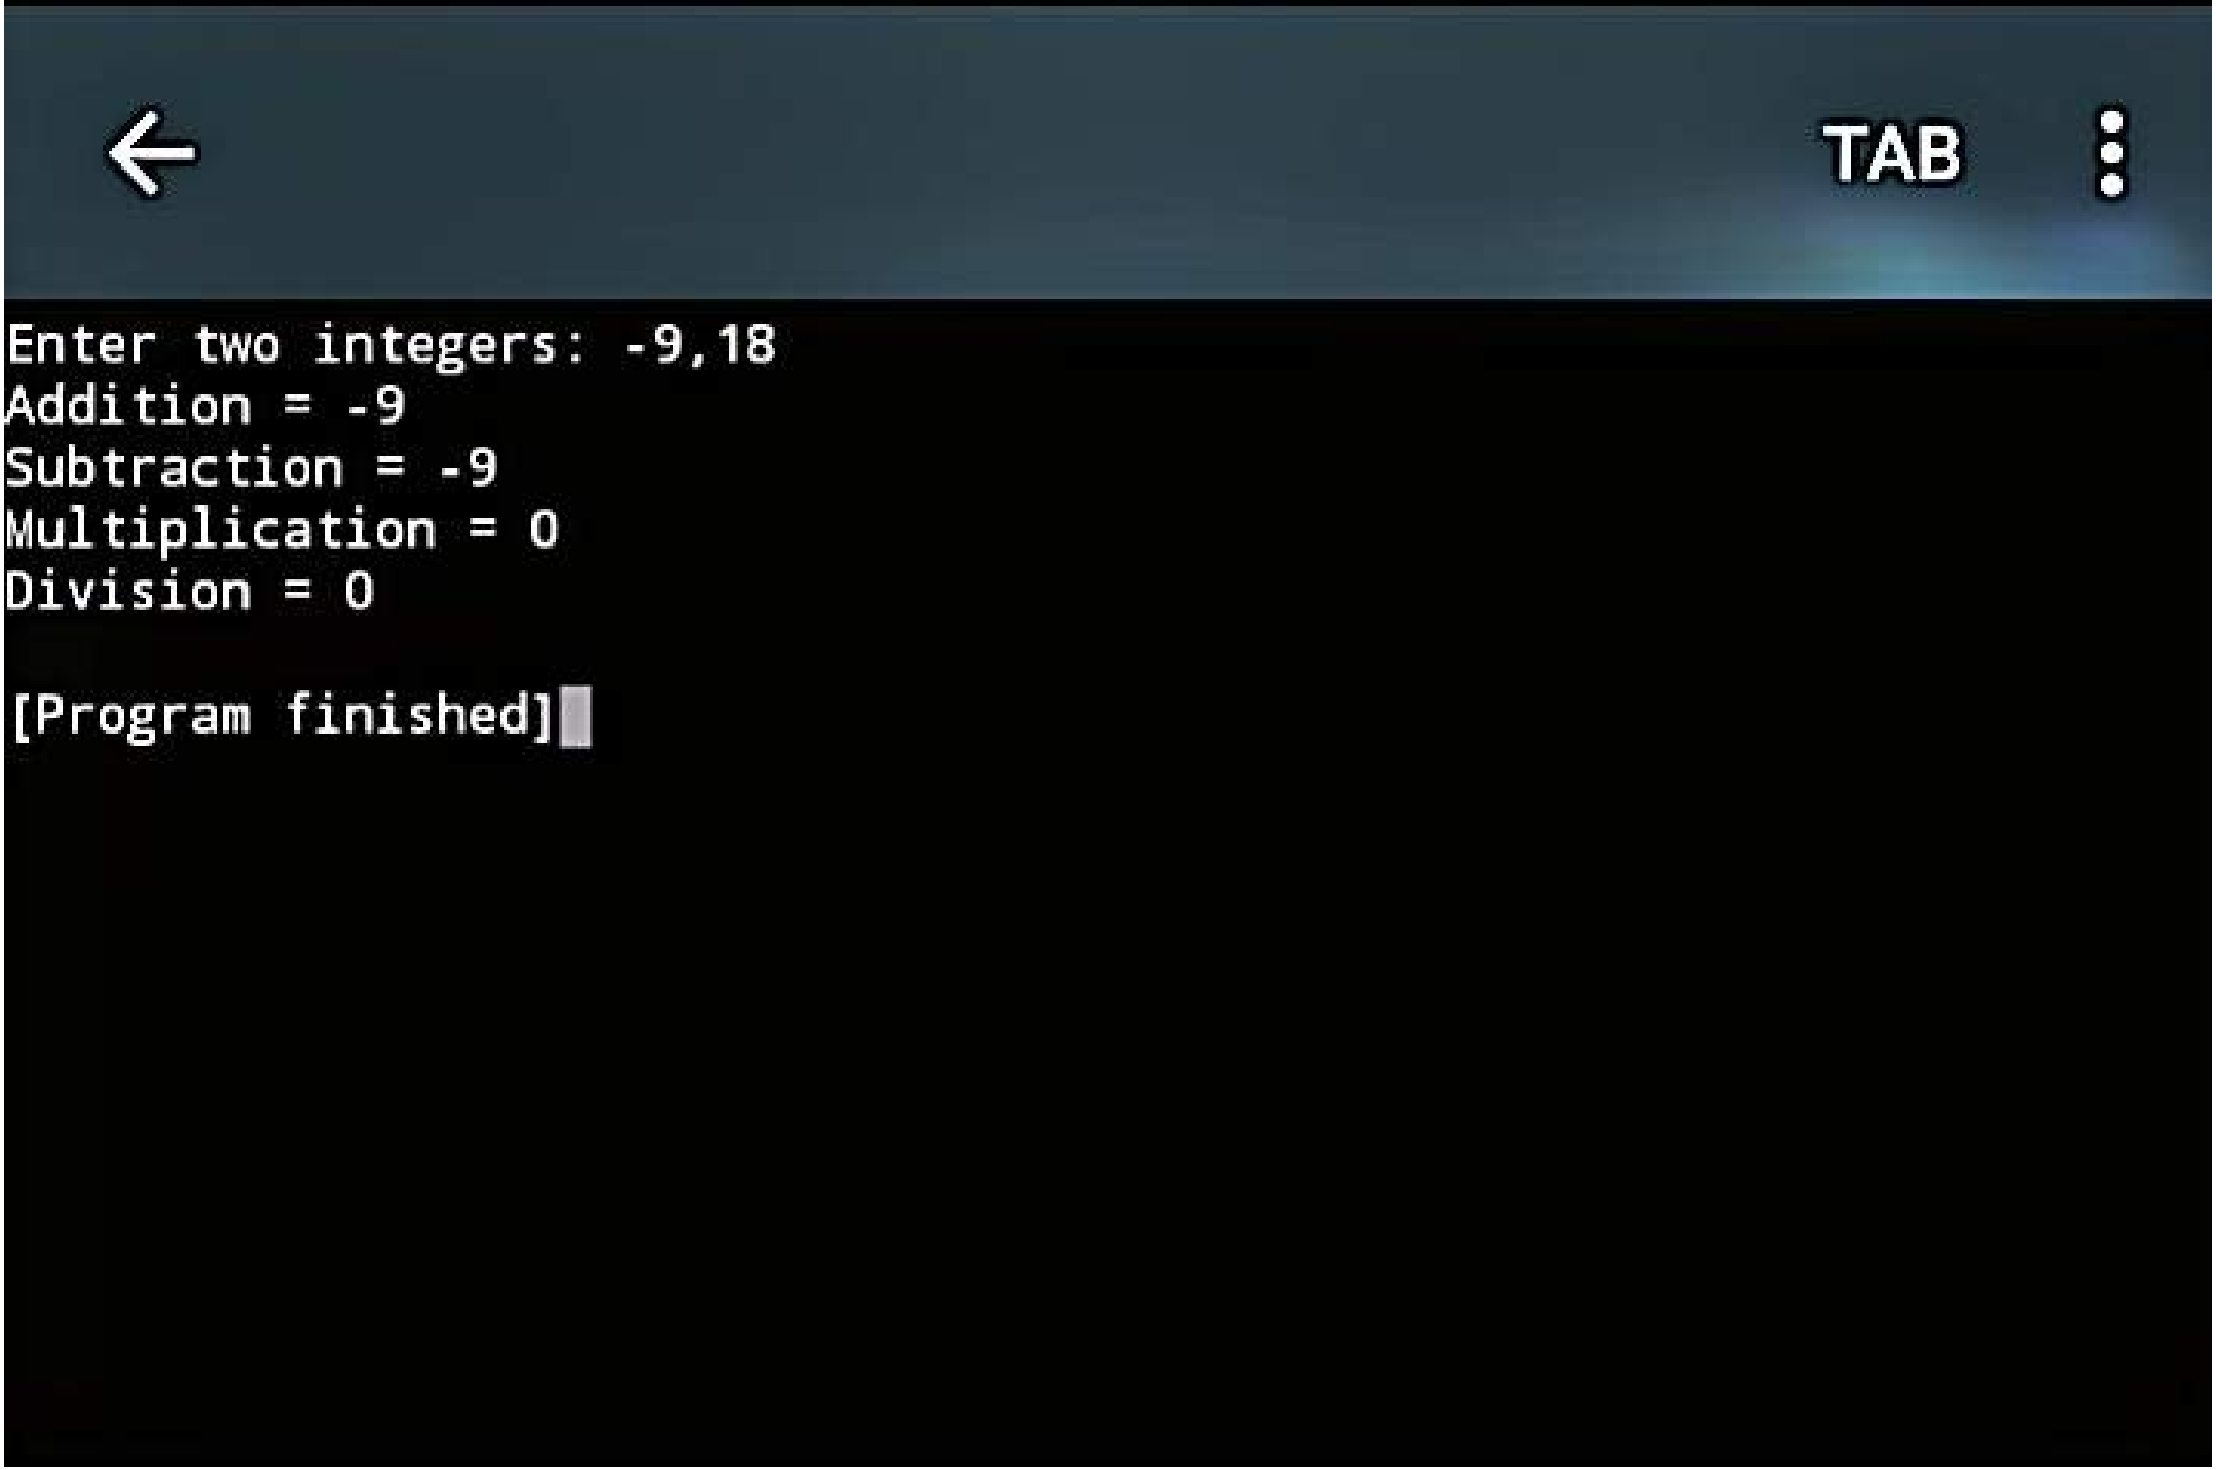
int main()
{
    int num1, num2;

    cout << "Enter two integers: ";
    cin >> num1 >> num2;

    cout << "Addition = " << num1 + num2 << endl;
    cout << "Subtraction = " << num1 - num2 << endl;
    cout << "Multiplication = " << num1 * num2 <<
endl;
    cout << "Division = " << num1 / num2 << endl;

    return 0;
}
```

CamScanner


TAB
Enter two integers: -9,18
Addition = -9
Subtraction = -9
Multiplication = 0
Division = 0
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    int val1;
    int val2;
    int val3;

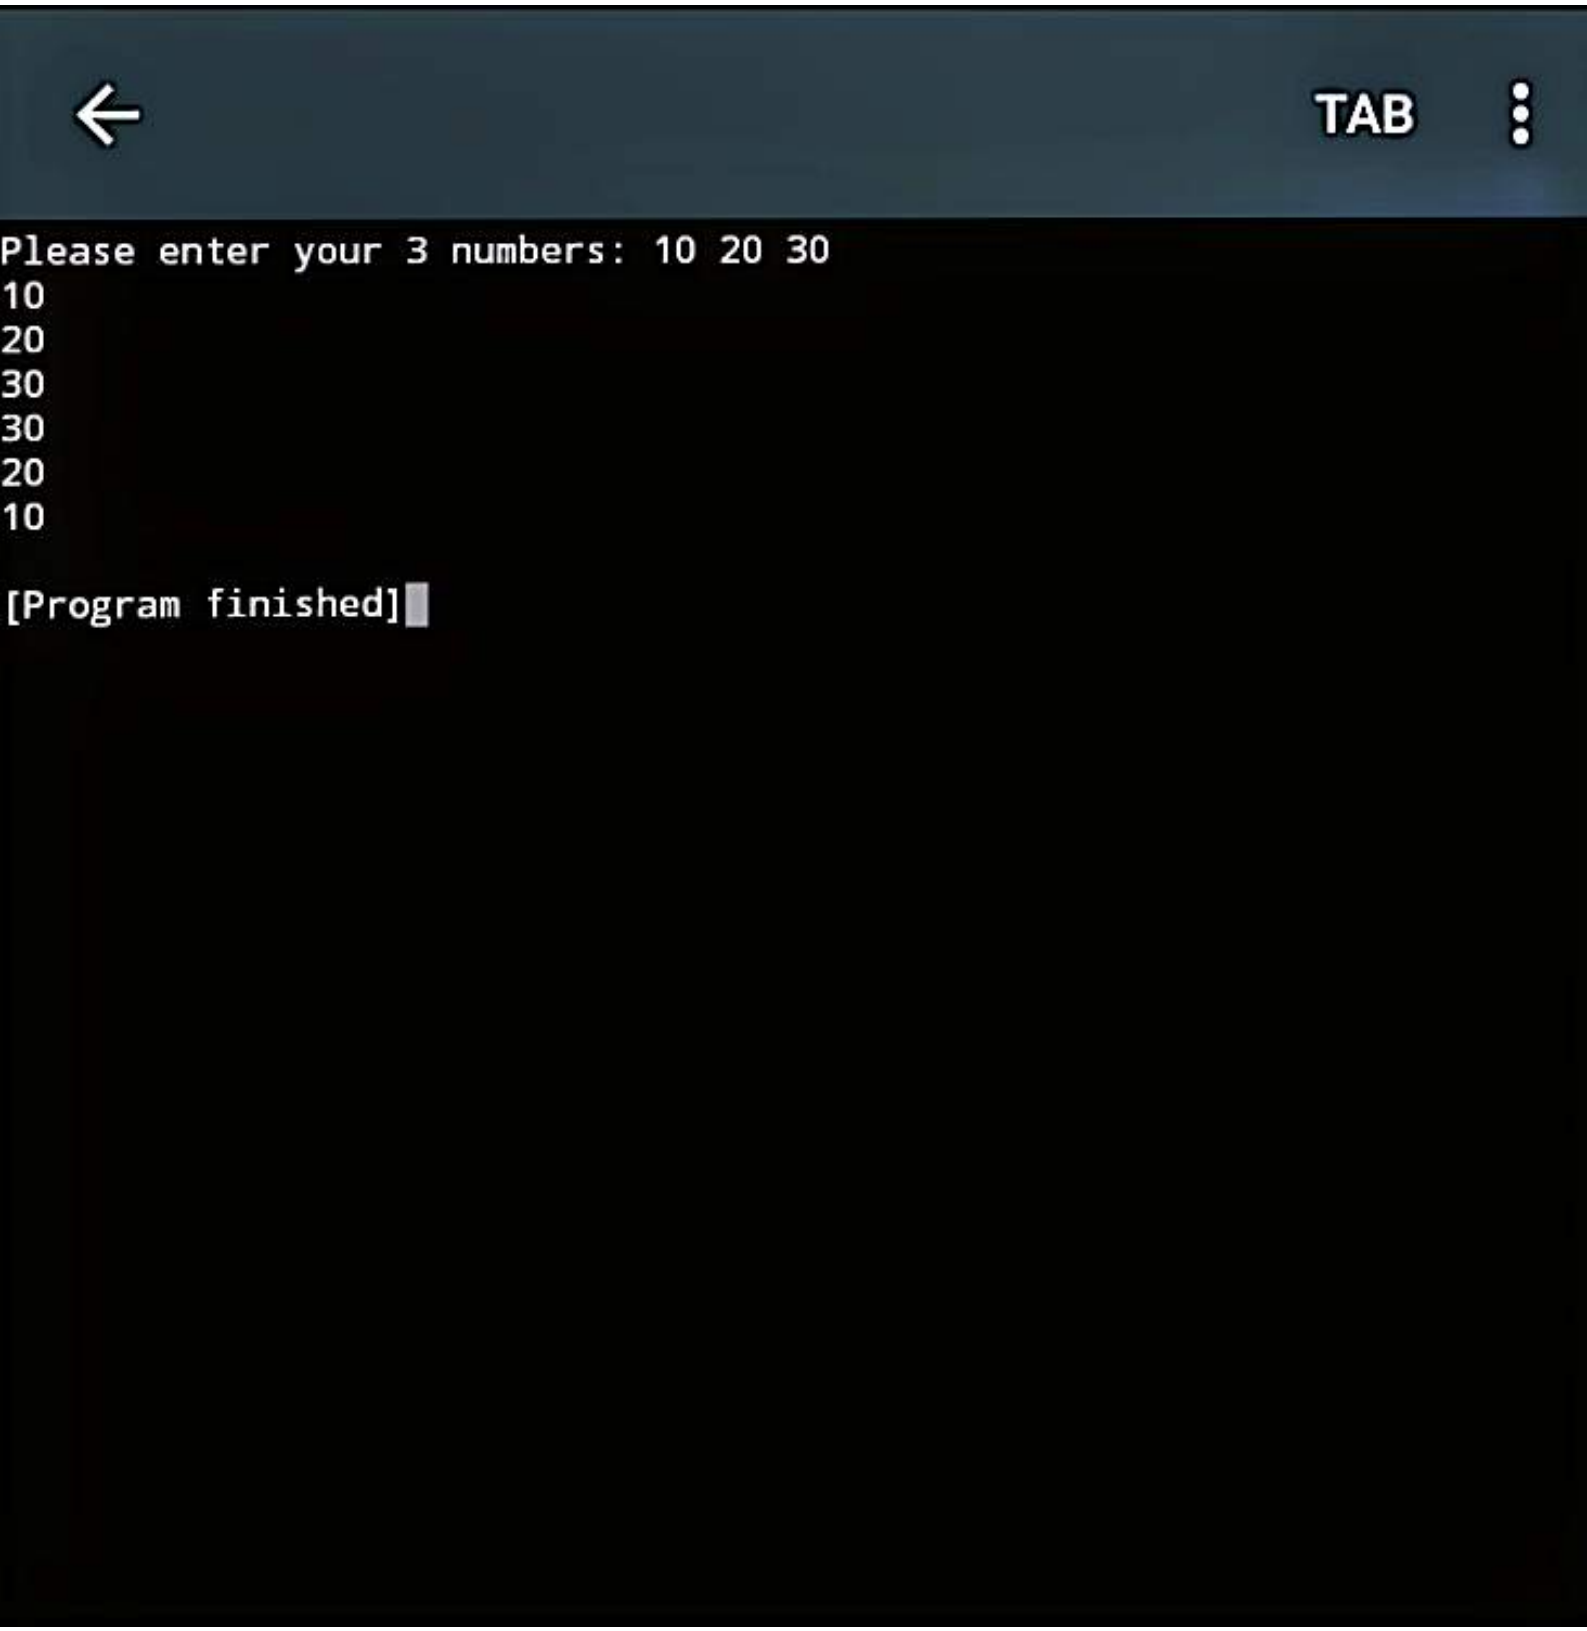
    cout << "Please enter your 3 numbers: ";
    cin >> val1 >> val2 >> val3;

    cout << val1 << "\n" << val2 << "\n" << val3 << "\n";


    cout << val3 << "\n" << val2 << "\n" << val1 << "\n";


    return 0;
}
```

CamScanner


TAB
Please enter your 3 numbers: 10 20 30
10
20
30
30
20
10
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
#include <cmath>
using namespace std;

int main()
{
    double x1, y1, x2, y2, d;

    cout << "Enter x1 and y1: ";
    cin >> x1 >> y1;

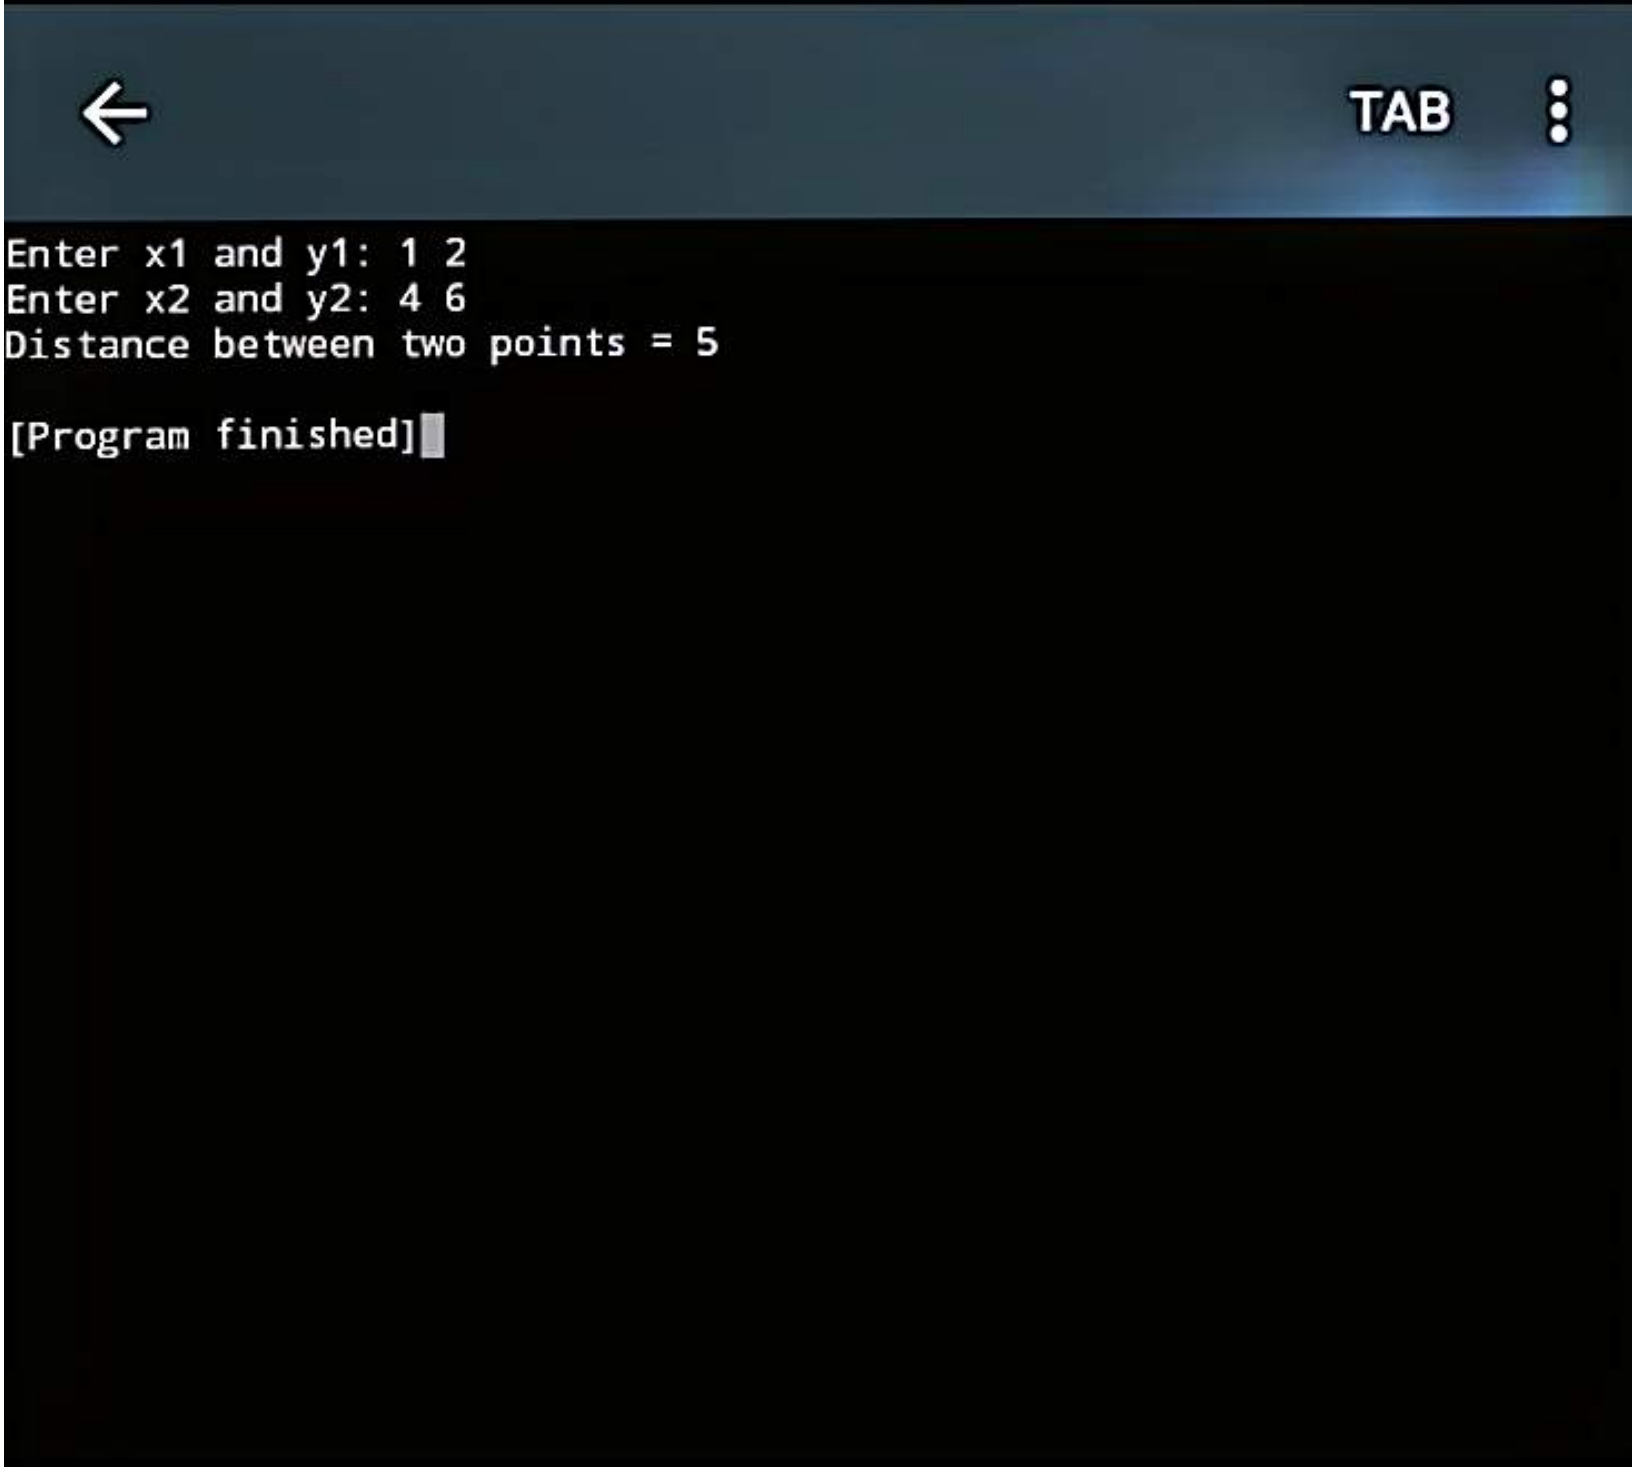
    cout << "Enter x2 and y2: ";
    cin >> x2 >> y2;

    d = sqrt(pow(x2 - x1, 2) + pow(y2 - y1, 2));

    cout << "Distance between two points = " << d << endl;

    return 0;
}
```

CamScanner


TAB
Enter x1 and y1: 1 2
Enter x2 and y2: 4 6
Distance between two points = 5
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    double radius, area;
    const double PI = 3.14159;

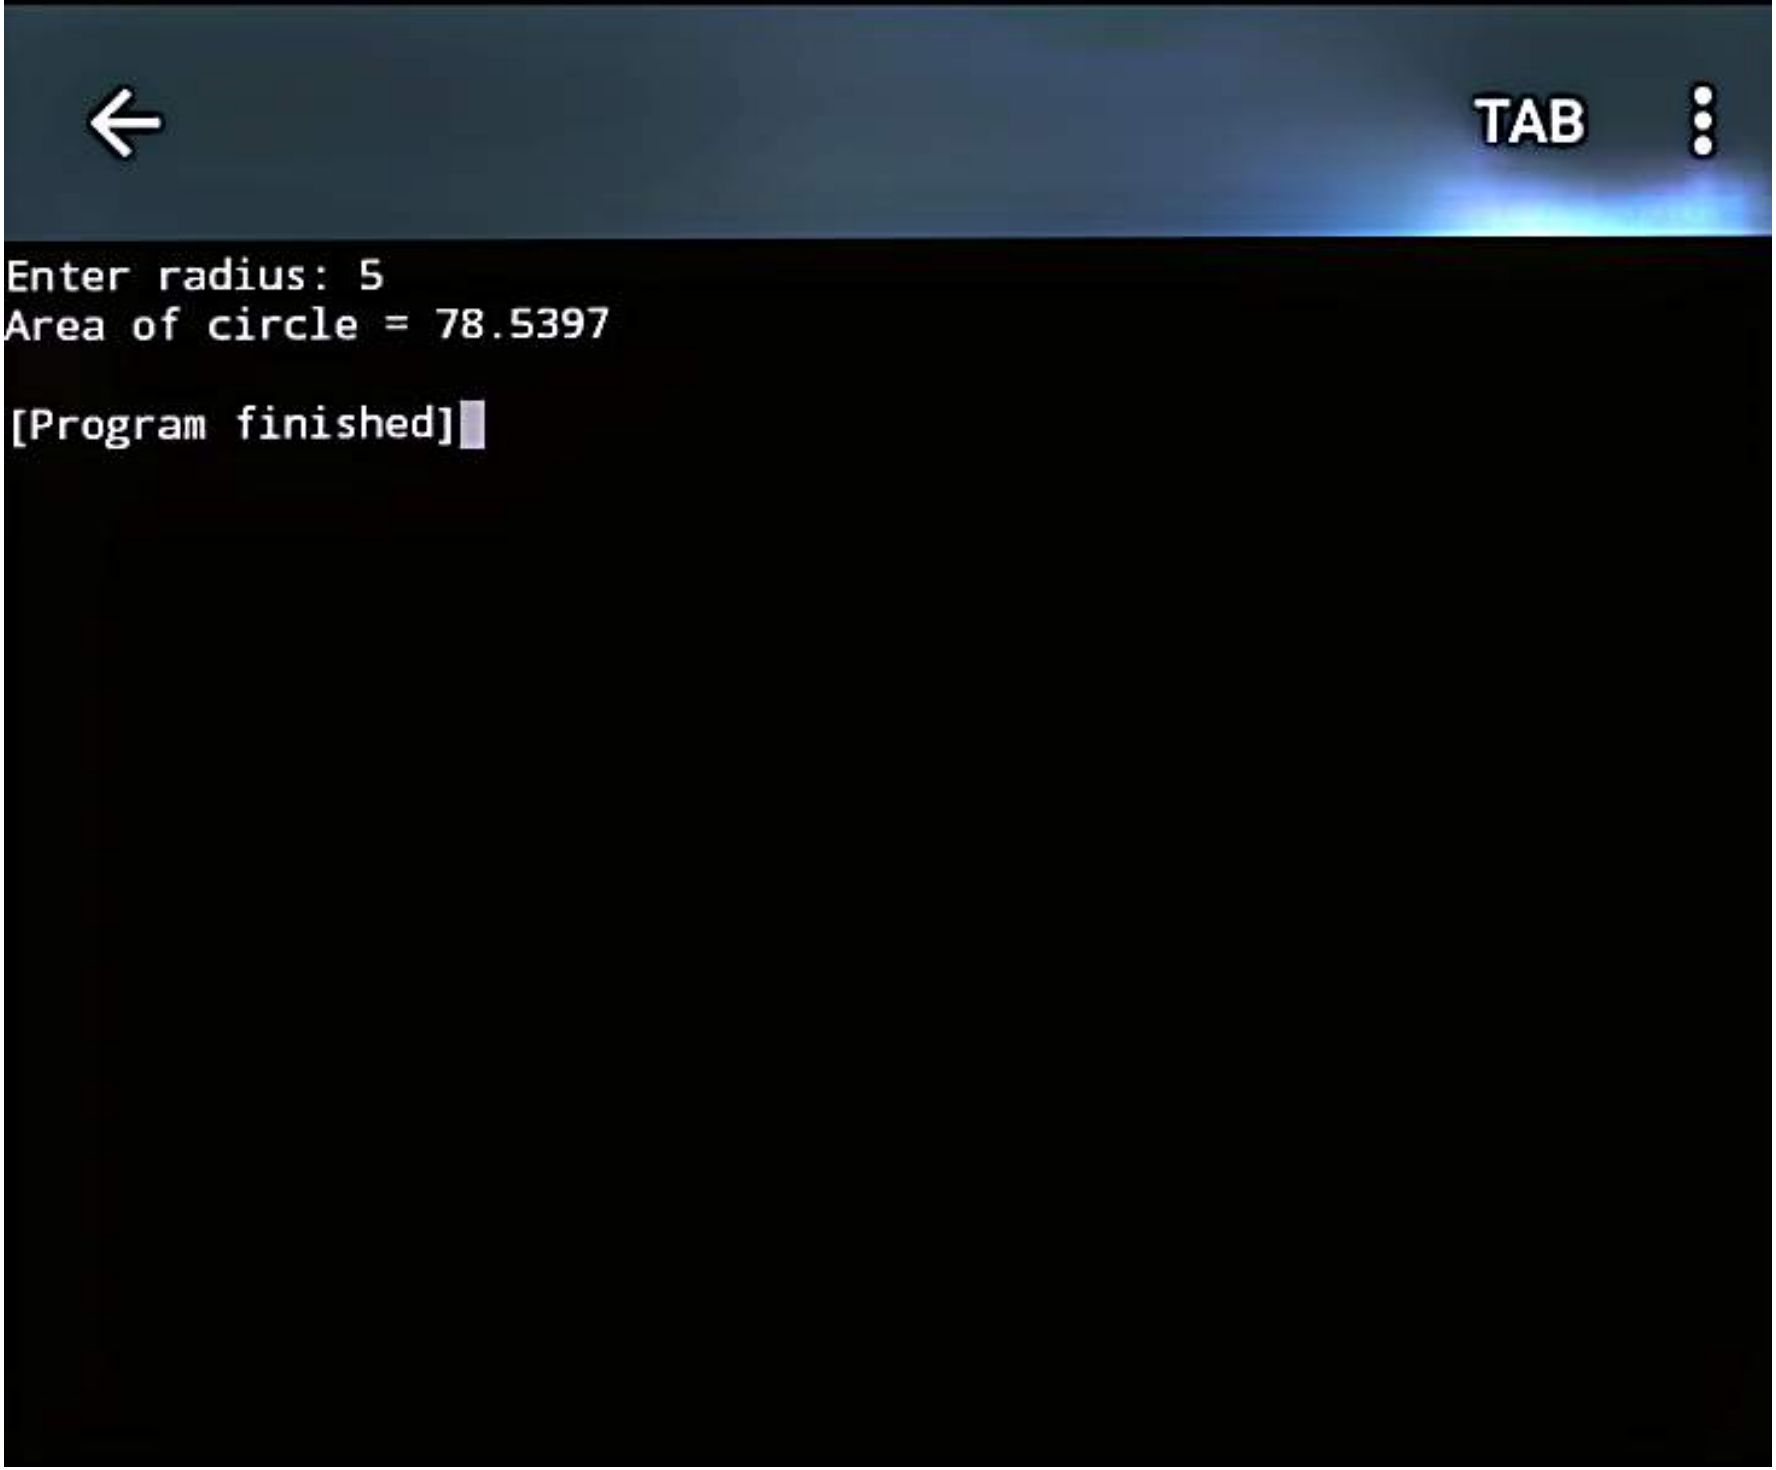
    cout << "Enter radius: ";
    cin >> radius;

    area = PI * radius * radius;

    cout << "Area of circle = " << area << endl;

    return 0;
}
```

CamScanner



CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    double length, width, area;

    cout << "Enter length: ";
    cin >> length;

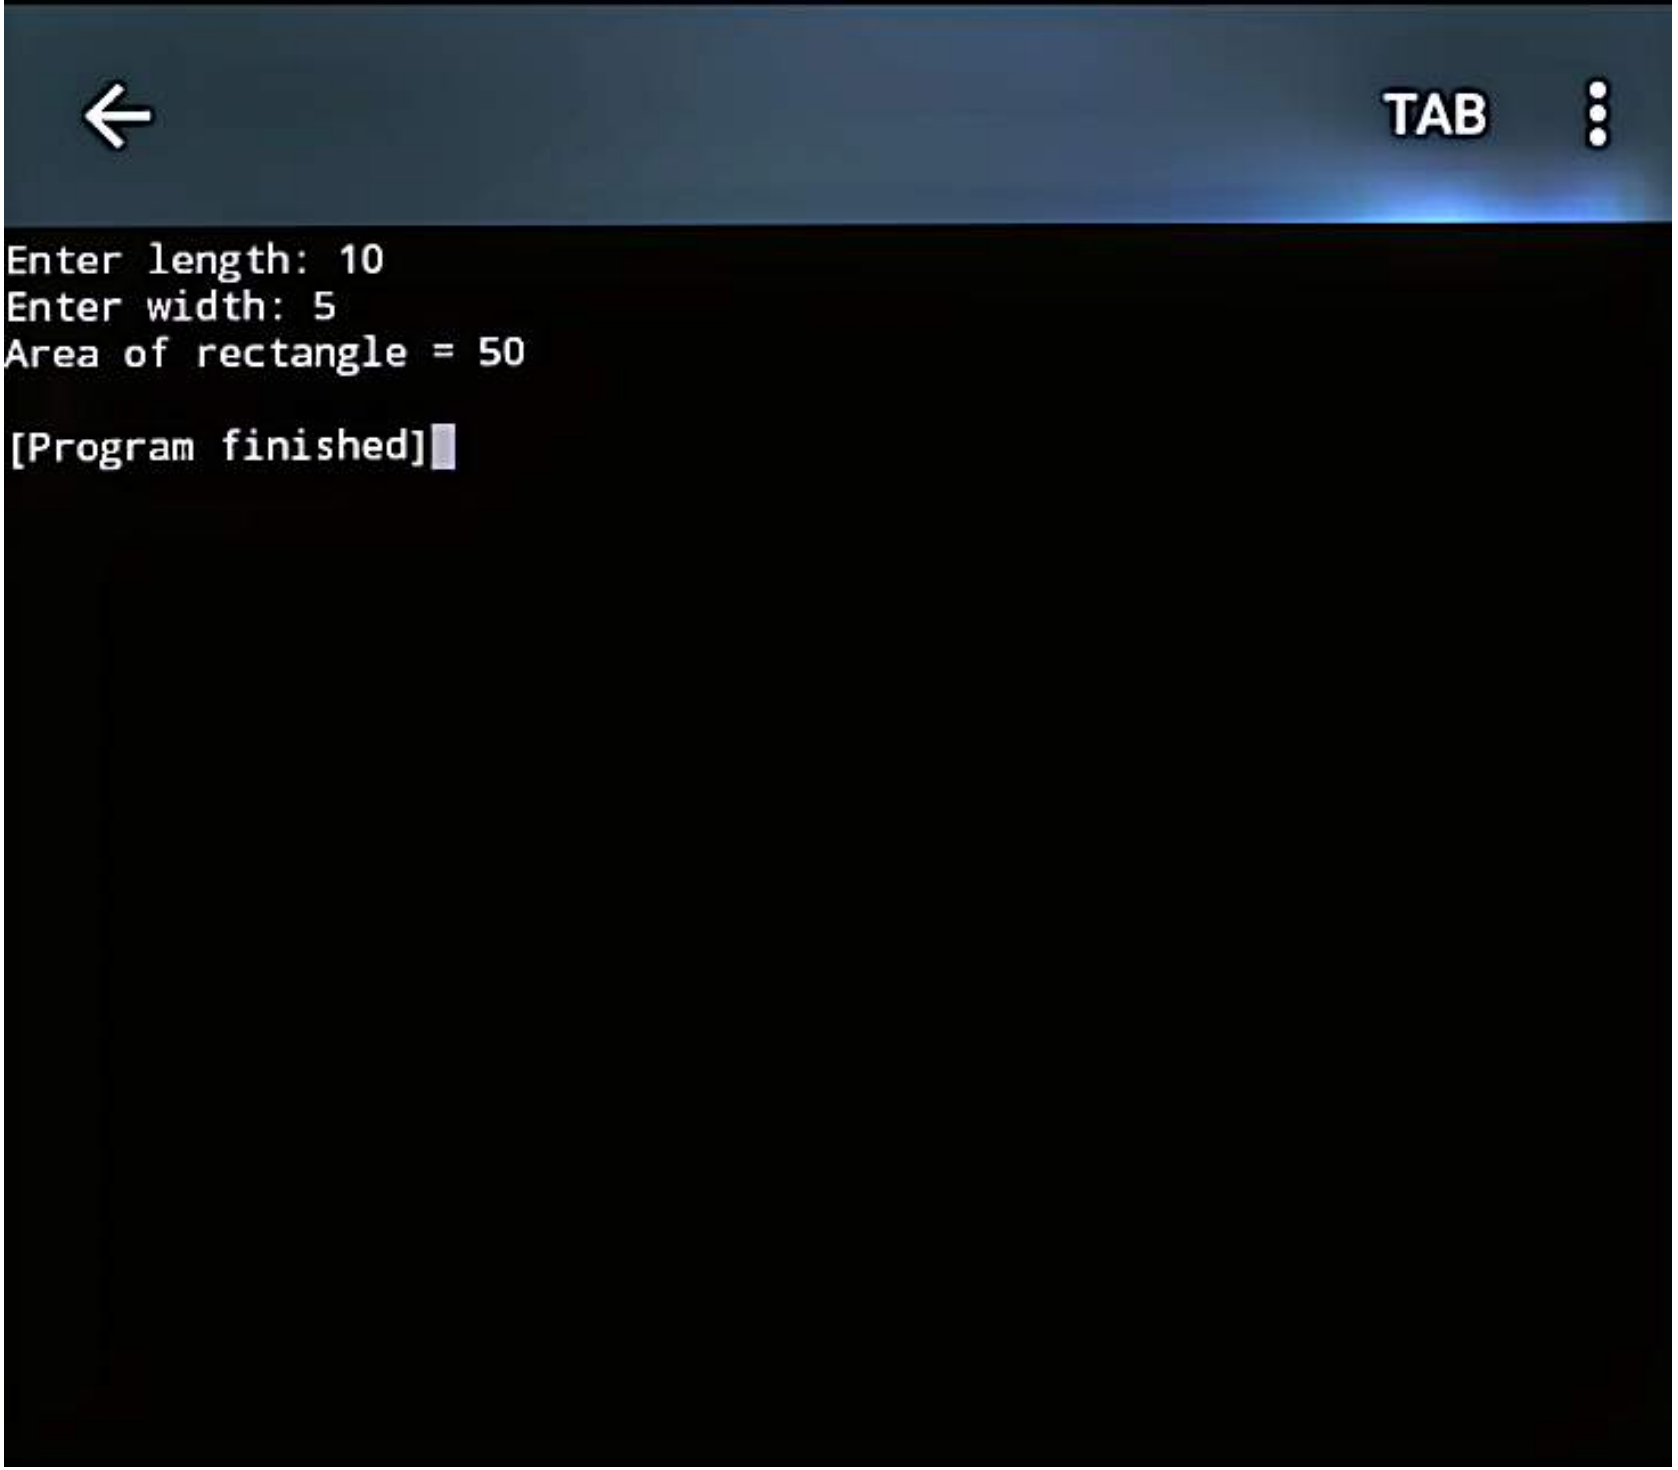
    cout << "Enter width: ";
    cin >> width;

    area = length * width;

    cout << "Area of rectangle = " << area << endl;

    return 0;
}
```

CamScanner


TAB
Enter length: 10
Enter width: 5
Area of rectangle = 50
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    double base, height, area;

    cout << "Enter base: ";
    cin >> base;

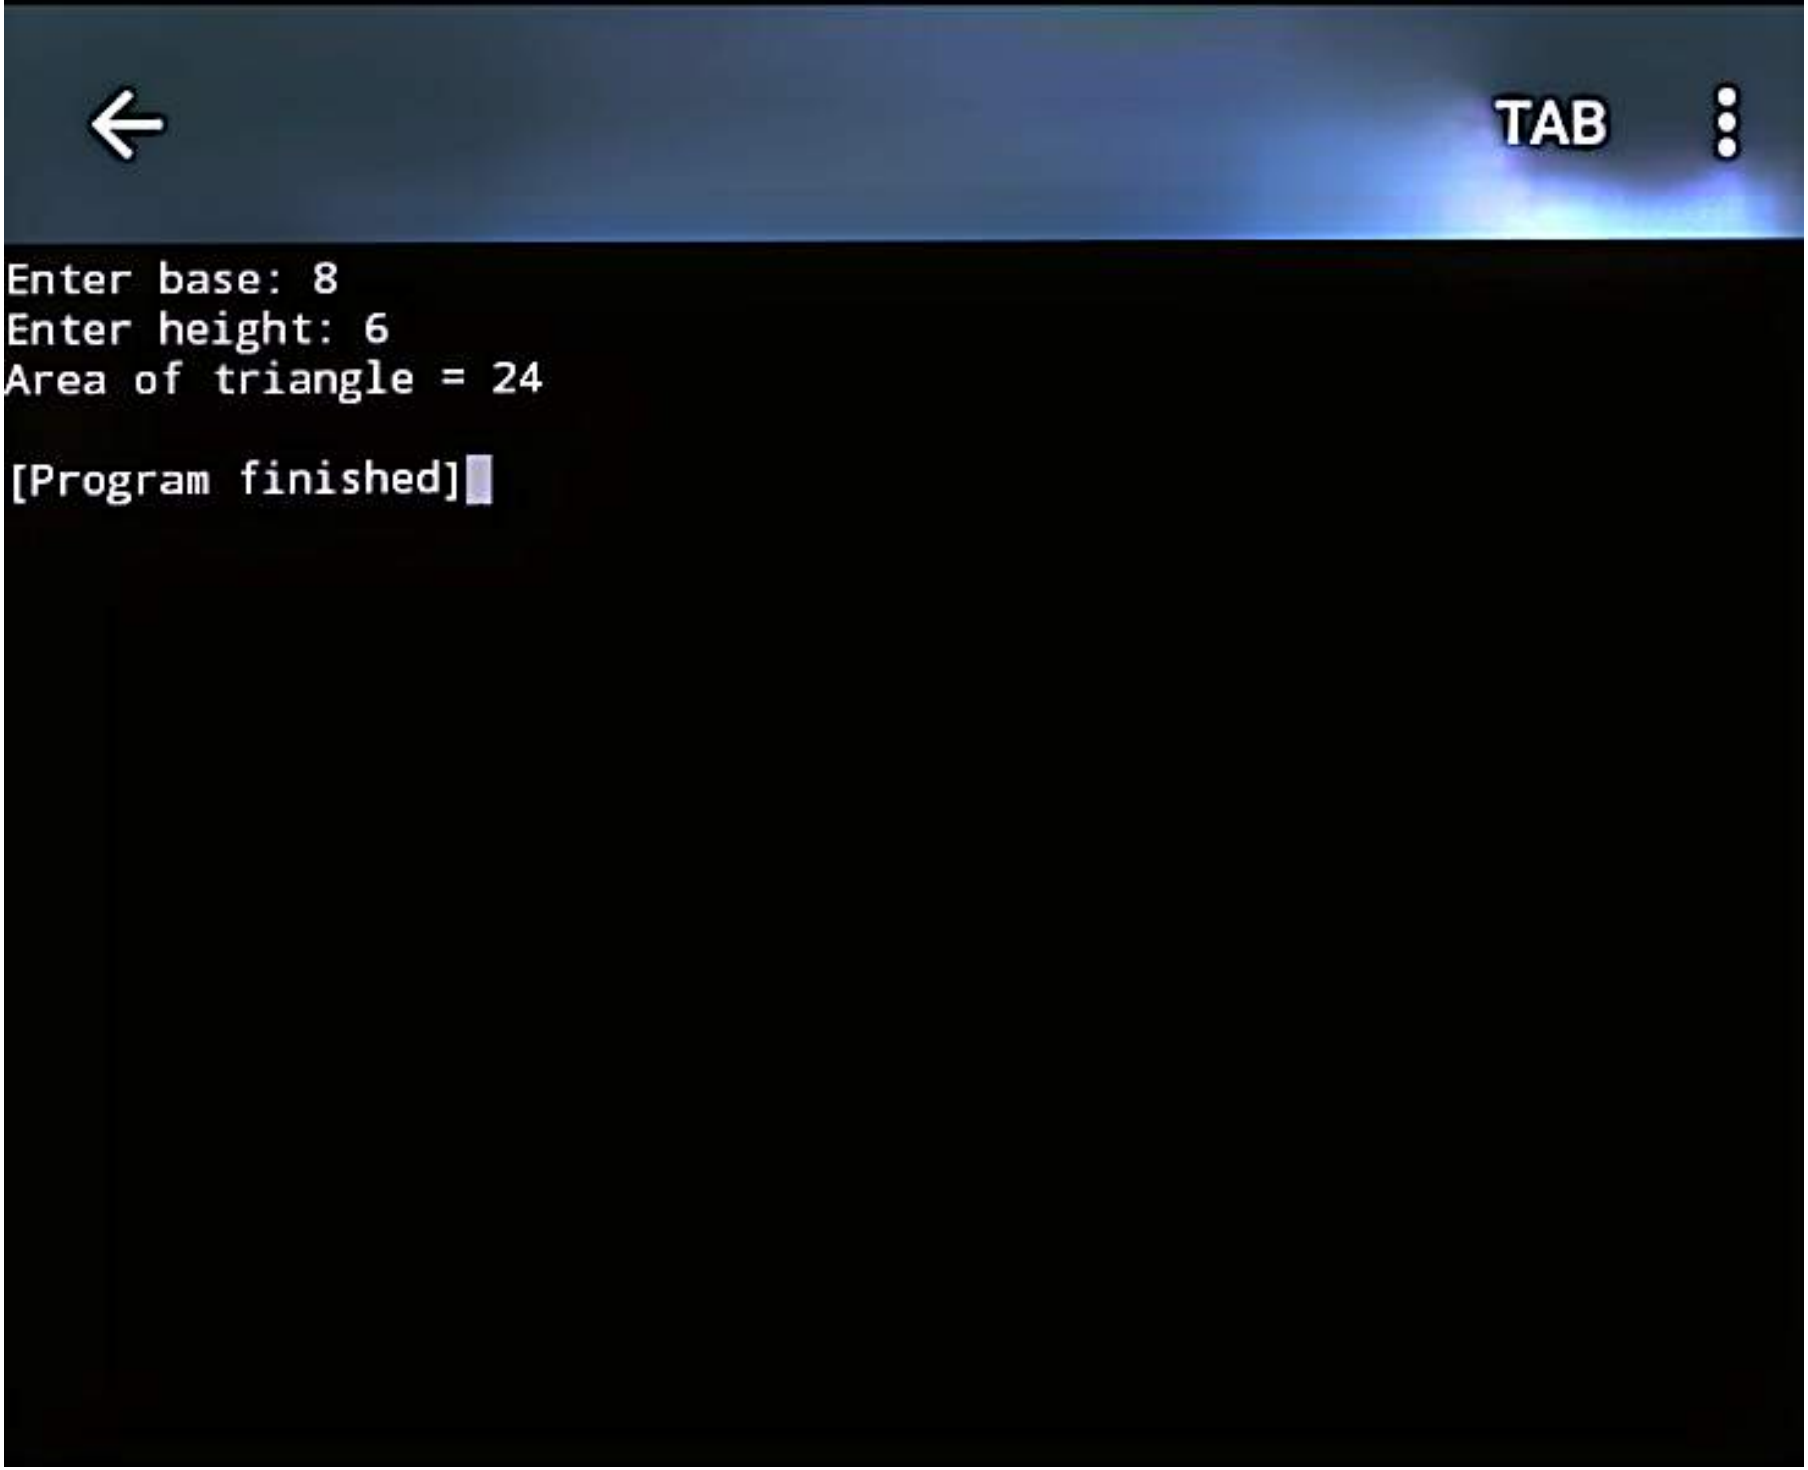
    cout << "Enter height: ";
    cin >> height;

    area = base * height * 0.5;

    cout << "Area of triangle = " << area << endl;

    return 0;
}
```

CamScanner


TAB
Enter base: 8
Enter height: 6
Area of triangle = 24
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
#include <iomanip>
using namespace std;

int main() {
    double item1 = 12.95;
    double item2 = 24.95;
    double item3 = 6.95;
    double item4 = 14.95;
    double item5 = 3.95;

    double subtotal = item1 + item2 + item3 + item4
+ item5;
    double tax = subtotal * 0.06;
    double total = subtotal + tax;

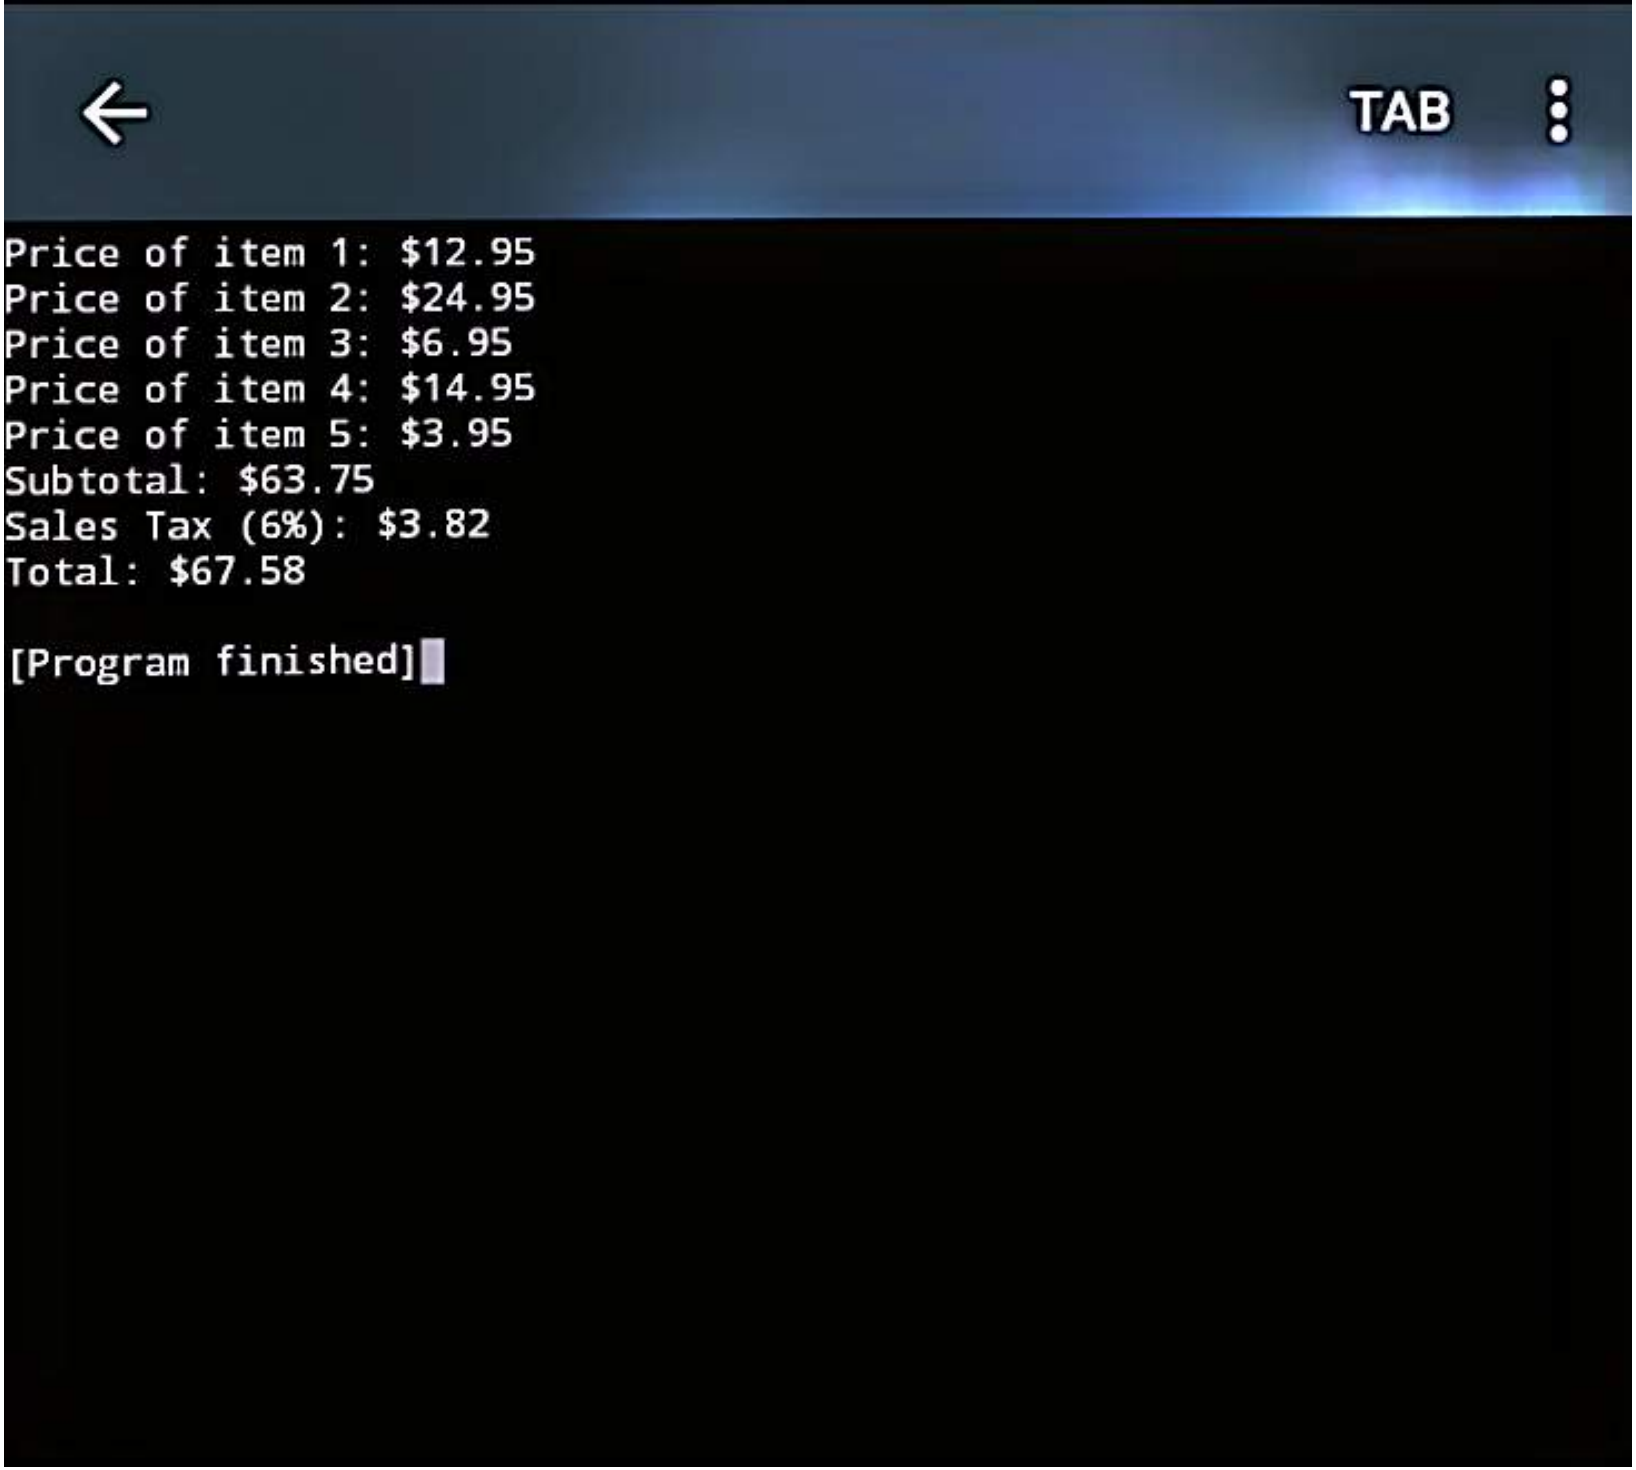
    cout << fixed << setprecision(2);

    cout << "Price of item 1: $" << item1 << endl;
    cout << "Price of item 2: $" << item2 << endl;
    cout << "Price of item 3: $" << item3 << endl;
    cout << "Price of item 4: $" << item4 << endl;
    cout << "Price of item 5: $" << item5 << endl;

    cout << "Subtotal: $" << subtotal << endl;
    cout << "Sales Tax (6%): $" << tax << endl;
    cout << "Total: $" << total << endl;

    return 0;
}
```

CamScanner


TAB
Price of item 1: $12.95
Price of item 2: $24.95
Price of item 3: $6.95
Price of item 4: $14.95
Price of item 5: $3.95
Subtotal: $63.75
Sales Tax (6%): $3.82
Total: $67.58
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

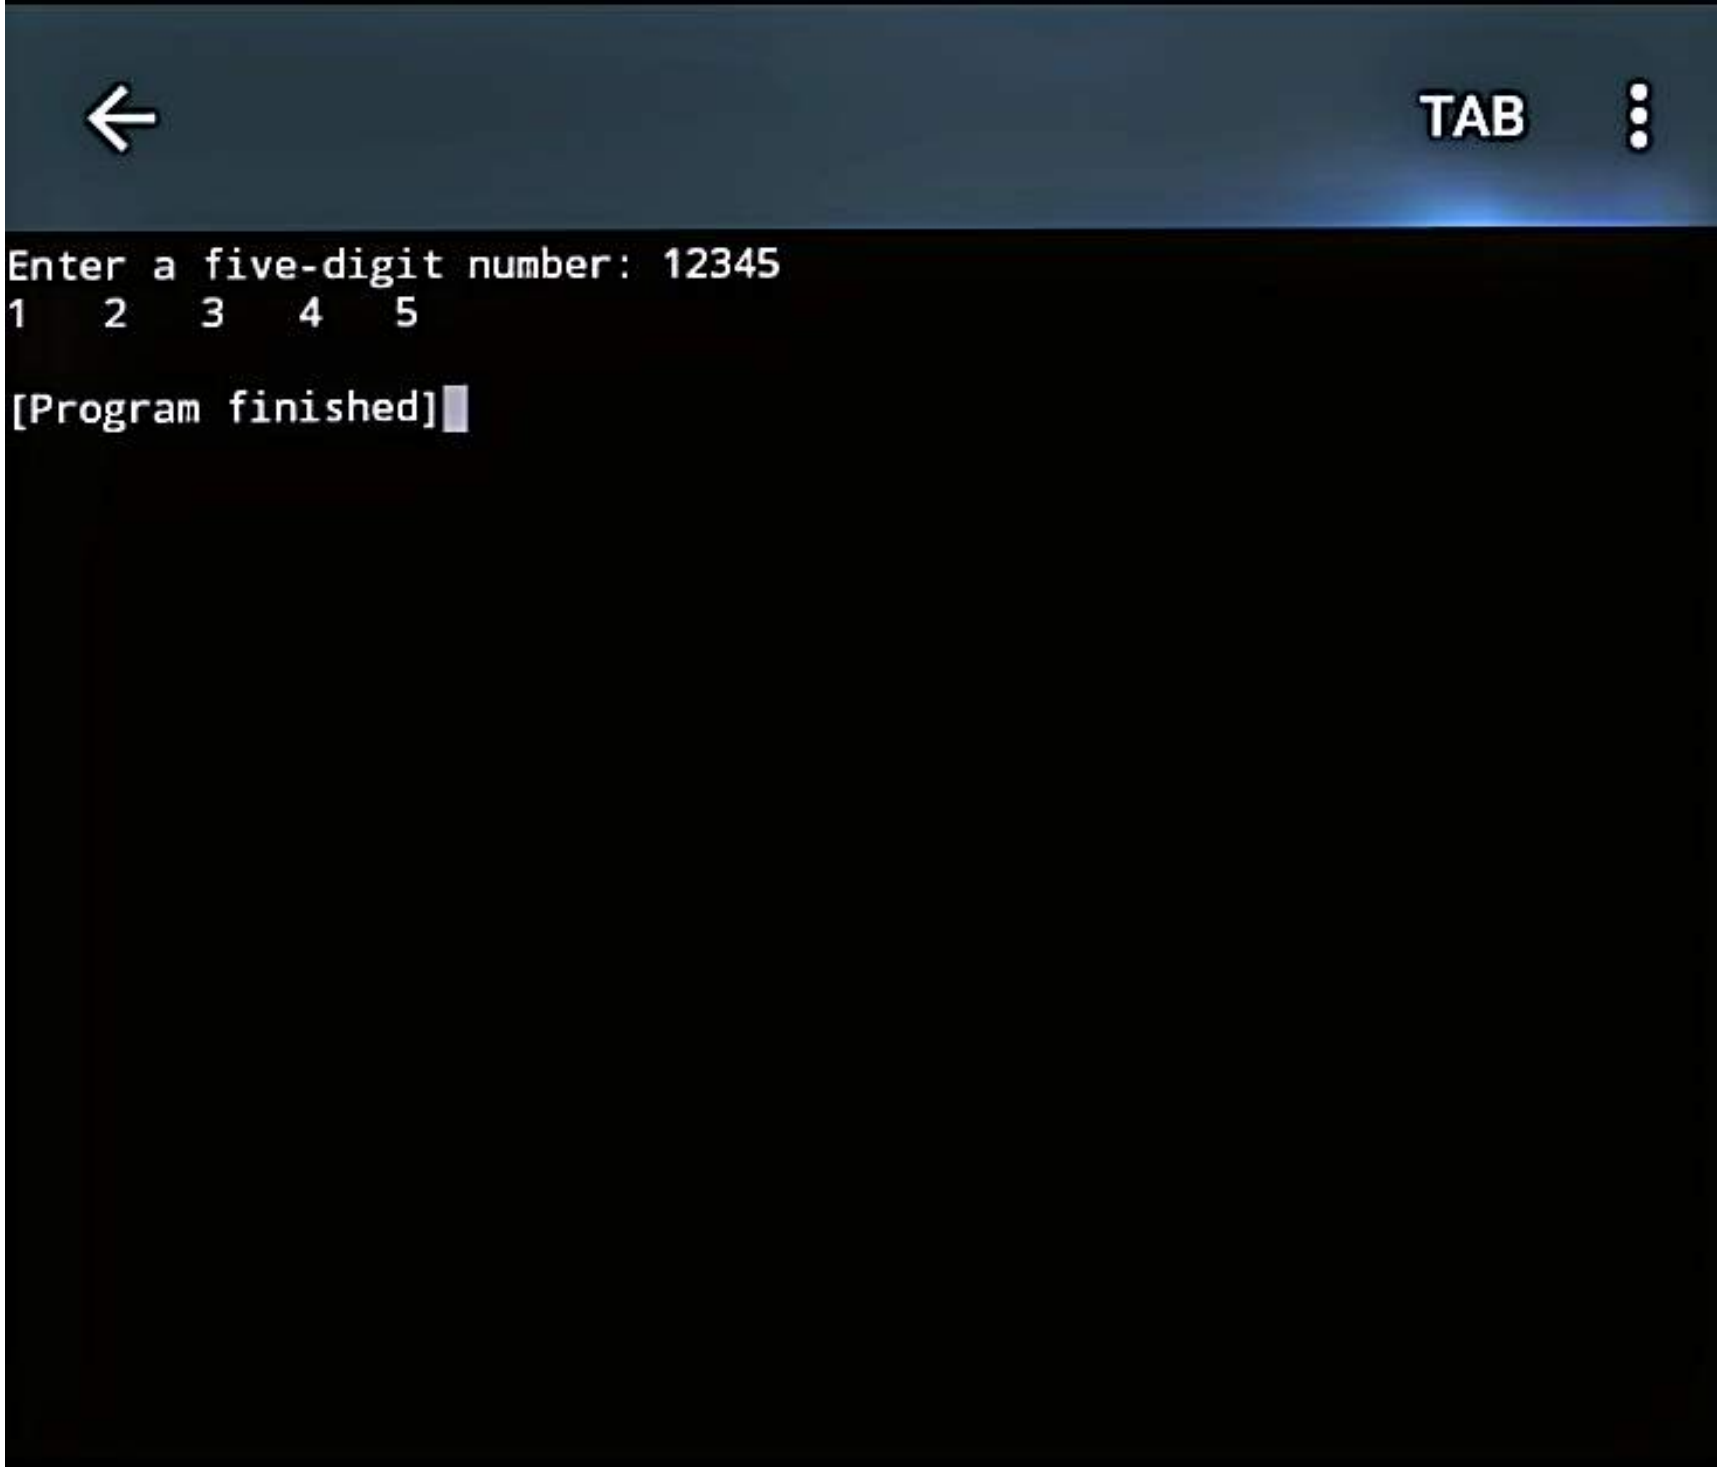
int main()
{
    int num;

    cout << "Enter a five-digit number: ";
    cin >> num;

    cout << num / 10000 << "   ";
    cout << (num / 1000) % 10 << "   ";
    cout << (num / 100) % 10 << "   ";
    cout << (num / 10) % 10 << "   ";
    cout << num % 10 << endl;

    return 0;
}
```

CamScanner



CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main() {
    int var1, var2, temp;

    cout << "Enter first number: ";
    cin >> var1;

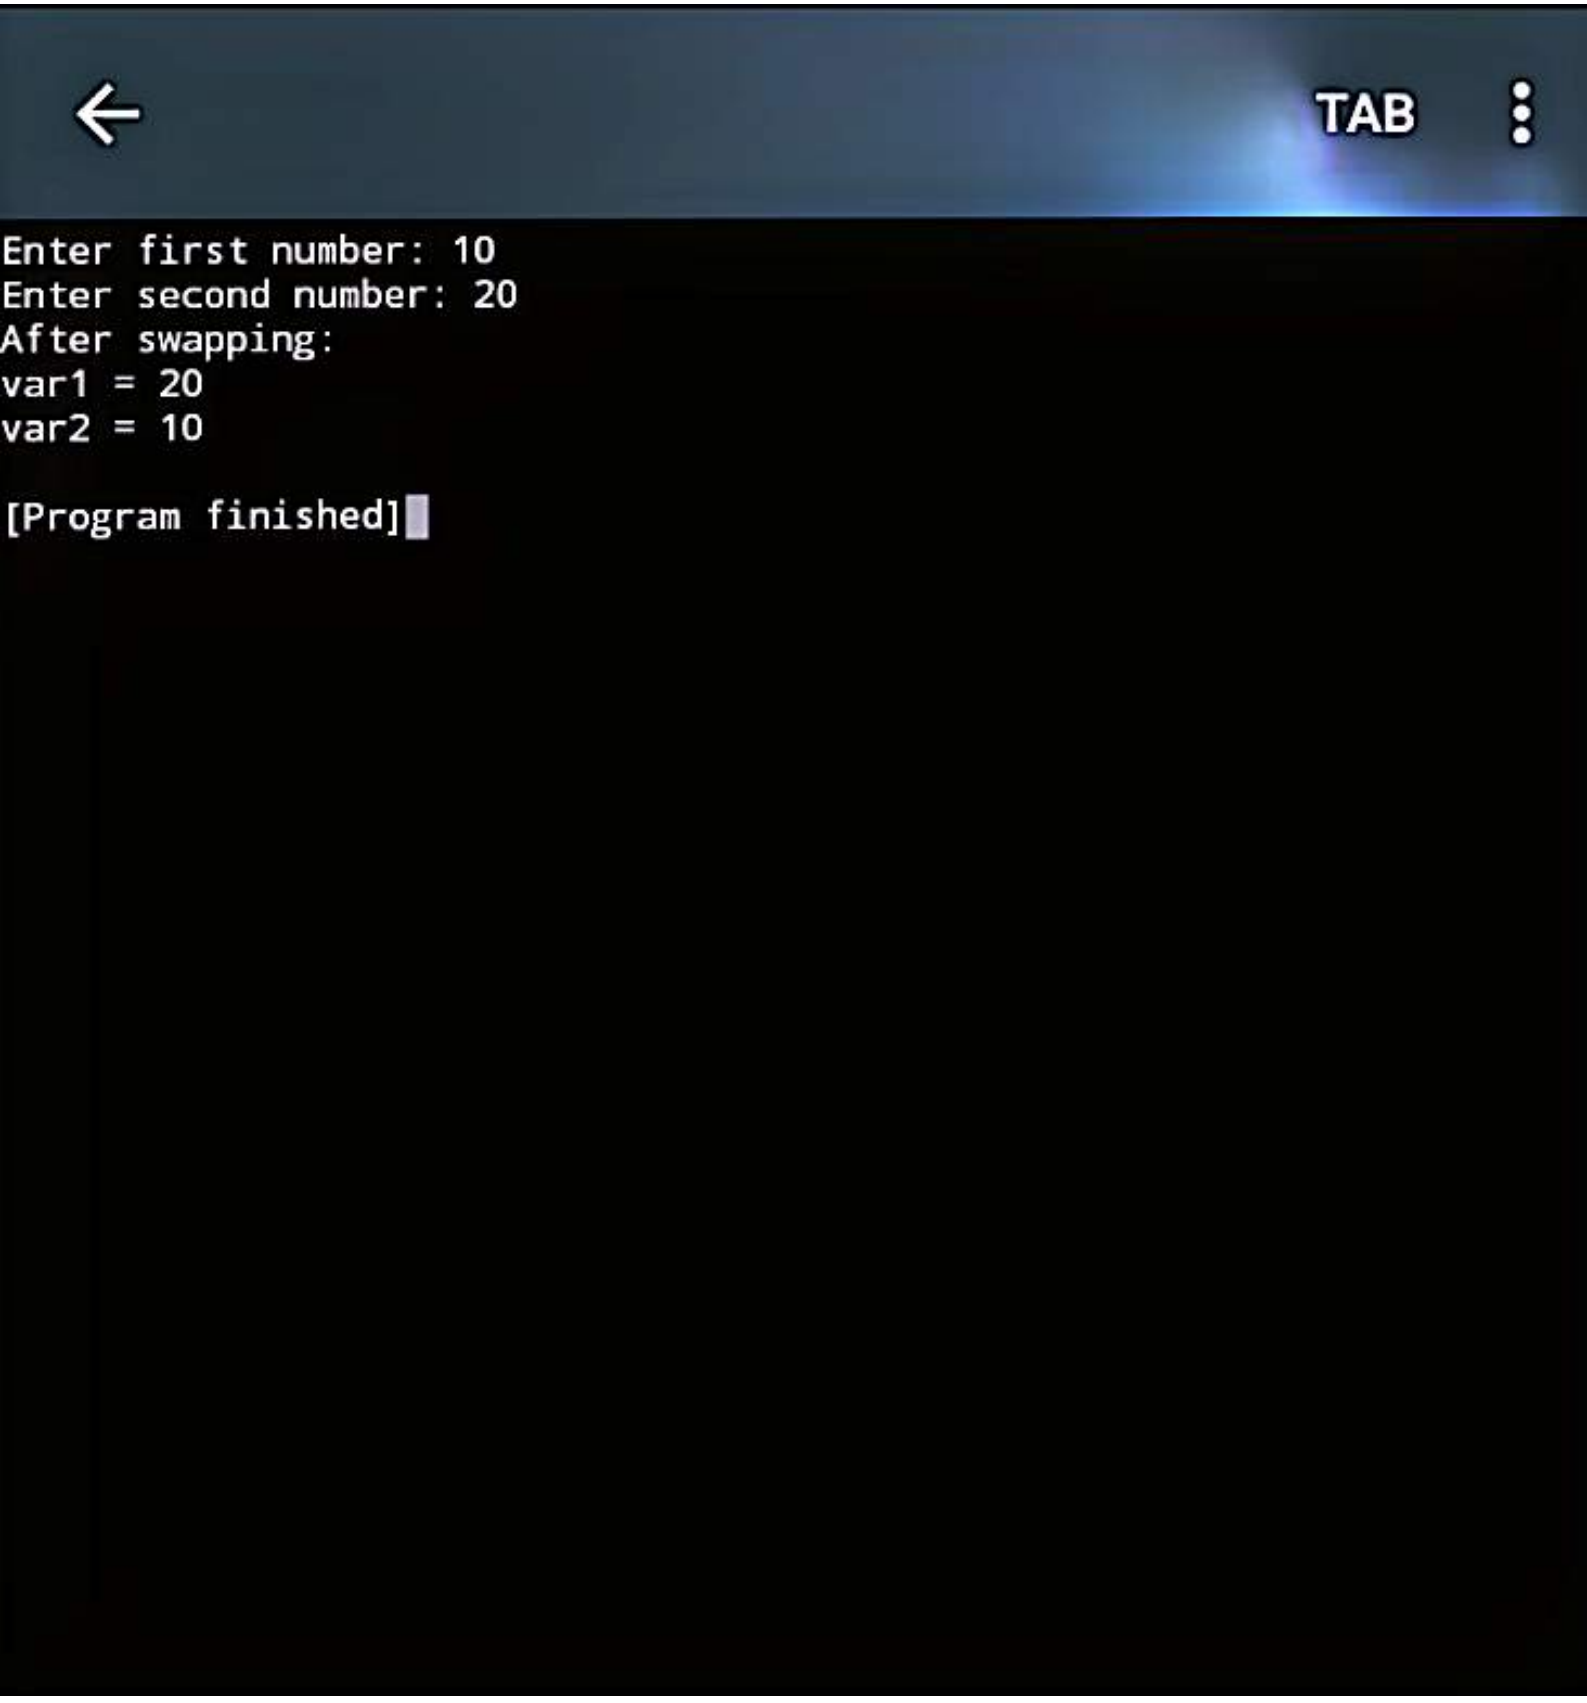
    cout << "Enter second number: ";
    cin >> var2;

    temp = var1;
    var1 = var2;
    var2 = temp;

    cout << "After swapping:" << endl;
    cout << "var1 = " << var1 << endl;
    cout << "var2 = " << var2 << endl;

    return 0;
}
```

CamScanner


TAB
Enter first number: 10
Enter second number: 20
After swapping:
var1 = 20
var2 = 10
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main() {
    char ch;

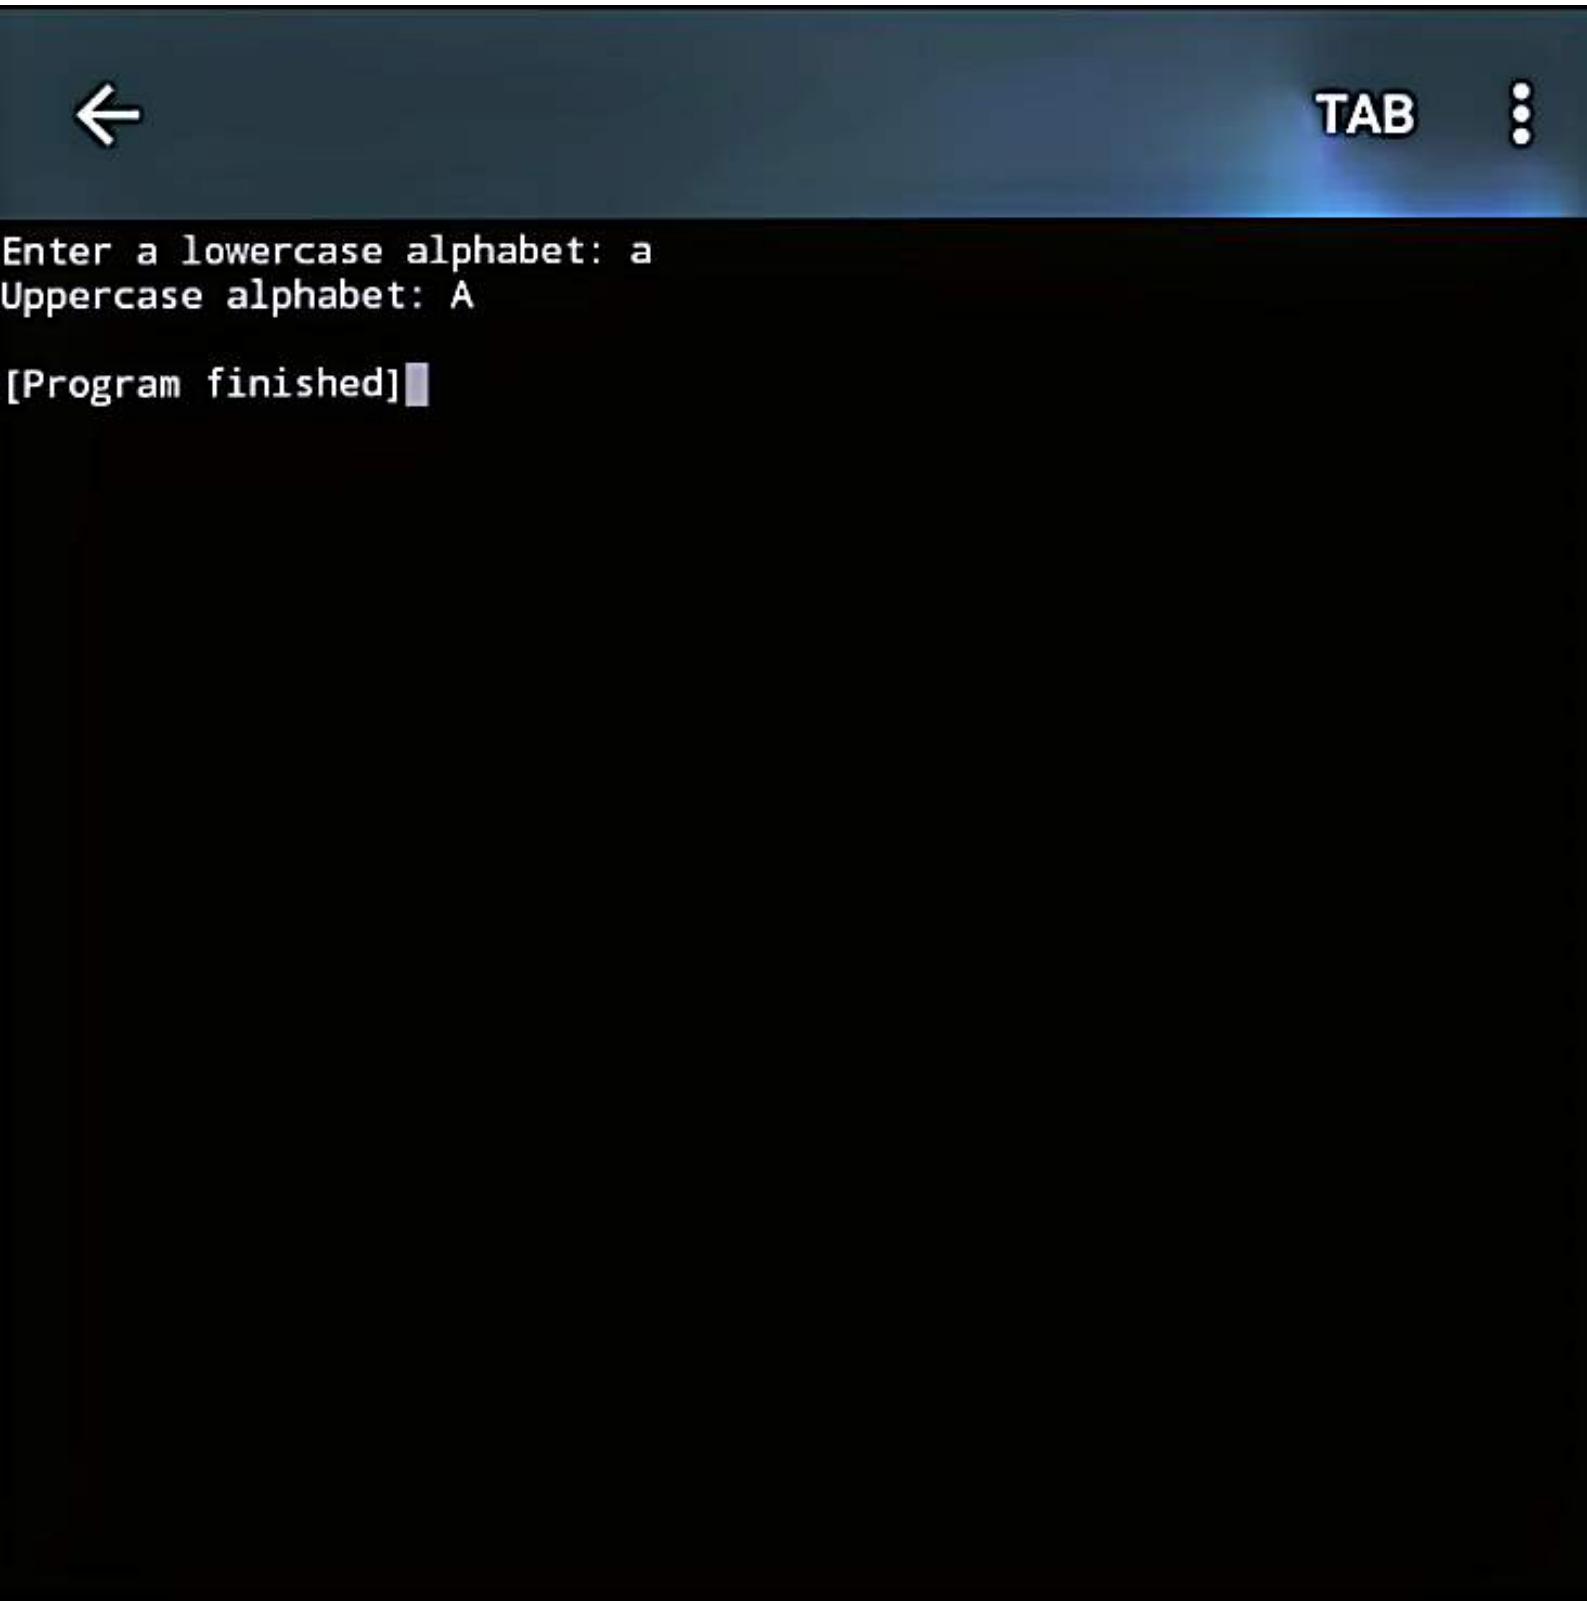
    cout << "Enter a lowercase alphabet: ";
    cin >> ch;

    ch = ch - 32;

    cout << "Uppercase alphabet: " << ch << endl;

    return 0;
}
```

CamScanner


TAB
Enter a lowercase alphabet: a
Uppercase alphabet: A
[Program finished]

CamScanner