new*

```cpp
#include <iostream>
using namespace std;


int main() {
    int age;
    double pay;
    char section;

    cin >> age >> pay >> section;

    cout << "Age: " << age << endl;
    cout << "Pay: " << pay << endl;
    cout << "Section: " << section << endl;

    return 0;
}
```

CamScanner

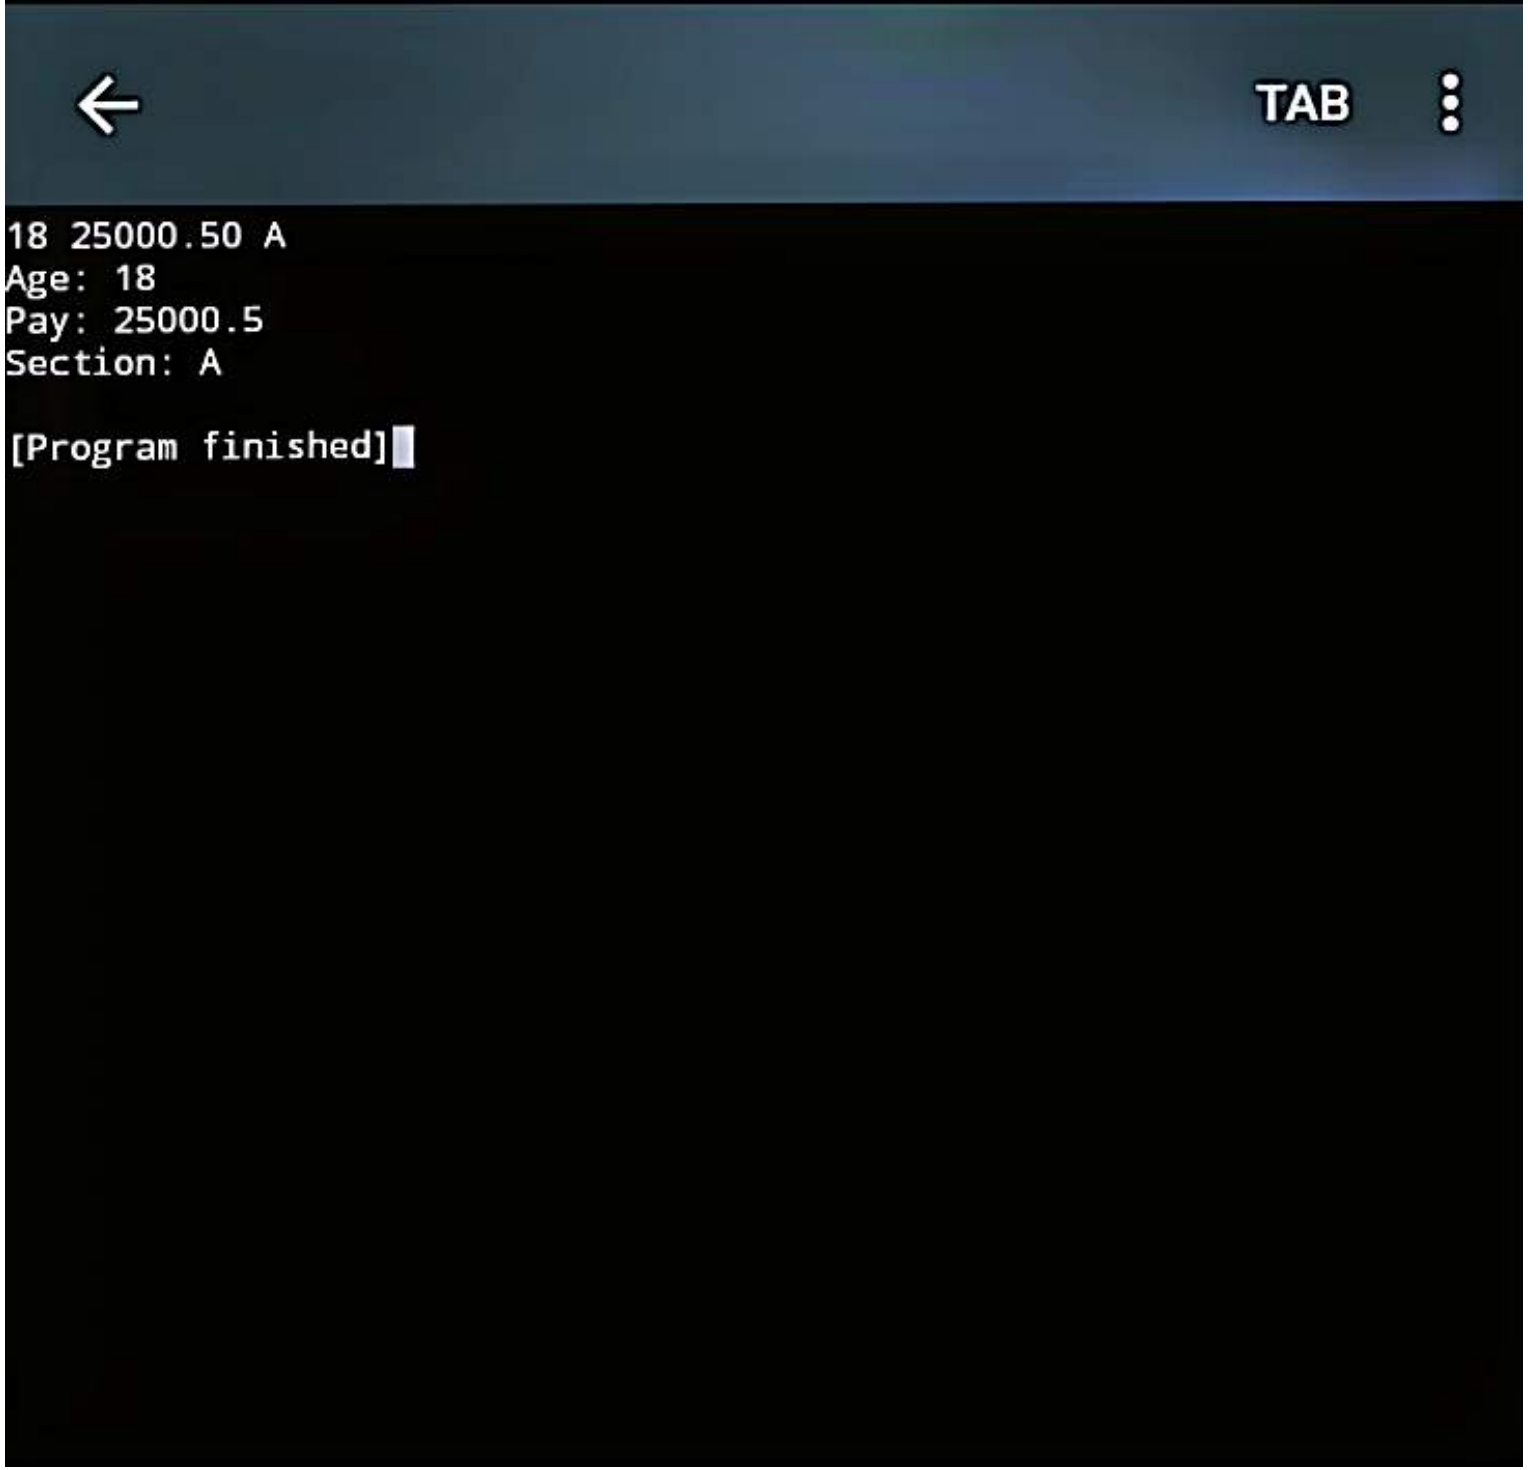
TAB
18 25000.50 A
Age: 18
Pay: 25000.5
Section: A
[Program finished]

CamScanner


new*

```cpp
#include <iostream>
using namespace std;

int main() {
    cout << 28 / 4 - 2 << endl;
    cout << 6 + 12 * 2 - 8 << endl;
    cout << 4 + 8 * 2 << endl;
    cout << 6 + 17 % 3 - 2 << endl;
    cout << 2 + 22 * (9 - 7) << endl;
    cout << (8 + 7) * 2 << endl;
    cout << (16 + 7) % 2 - 1 << endl;
    cout << 12 / (10 - 6) << endl;
    cout << (19 - 3) * (2 + 2) / 4 << endl;

    return 0;
}
```

CamScanner

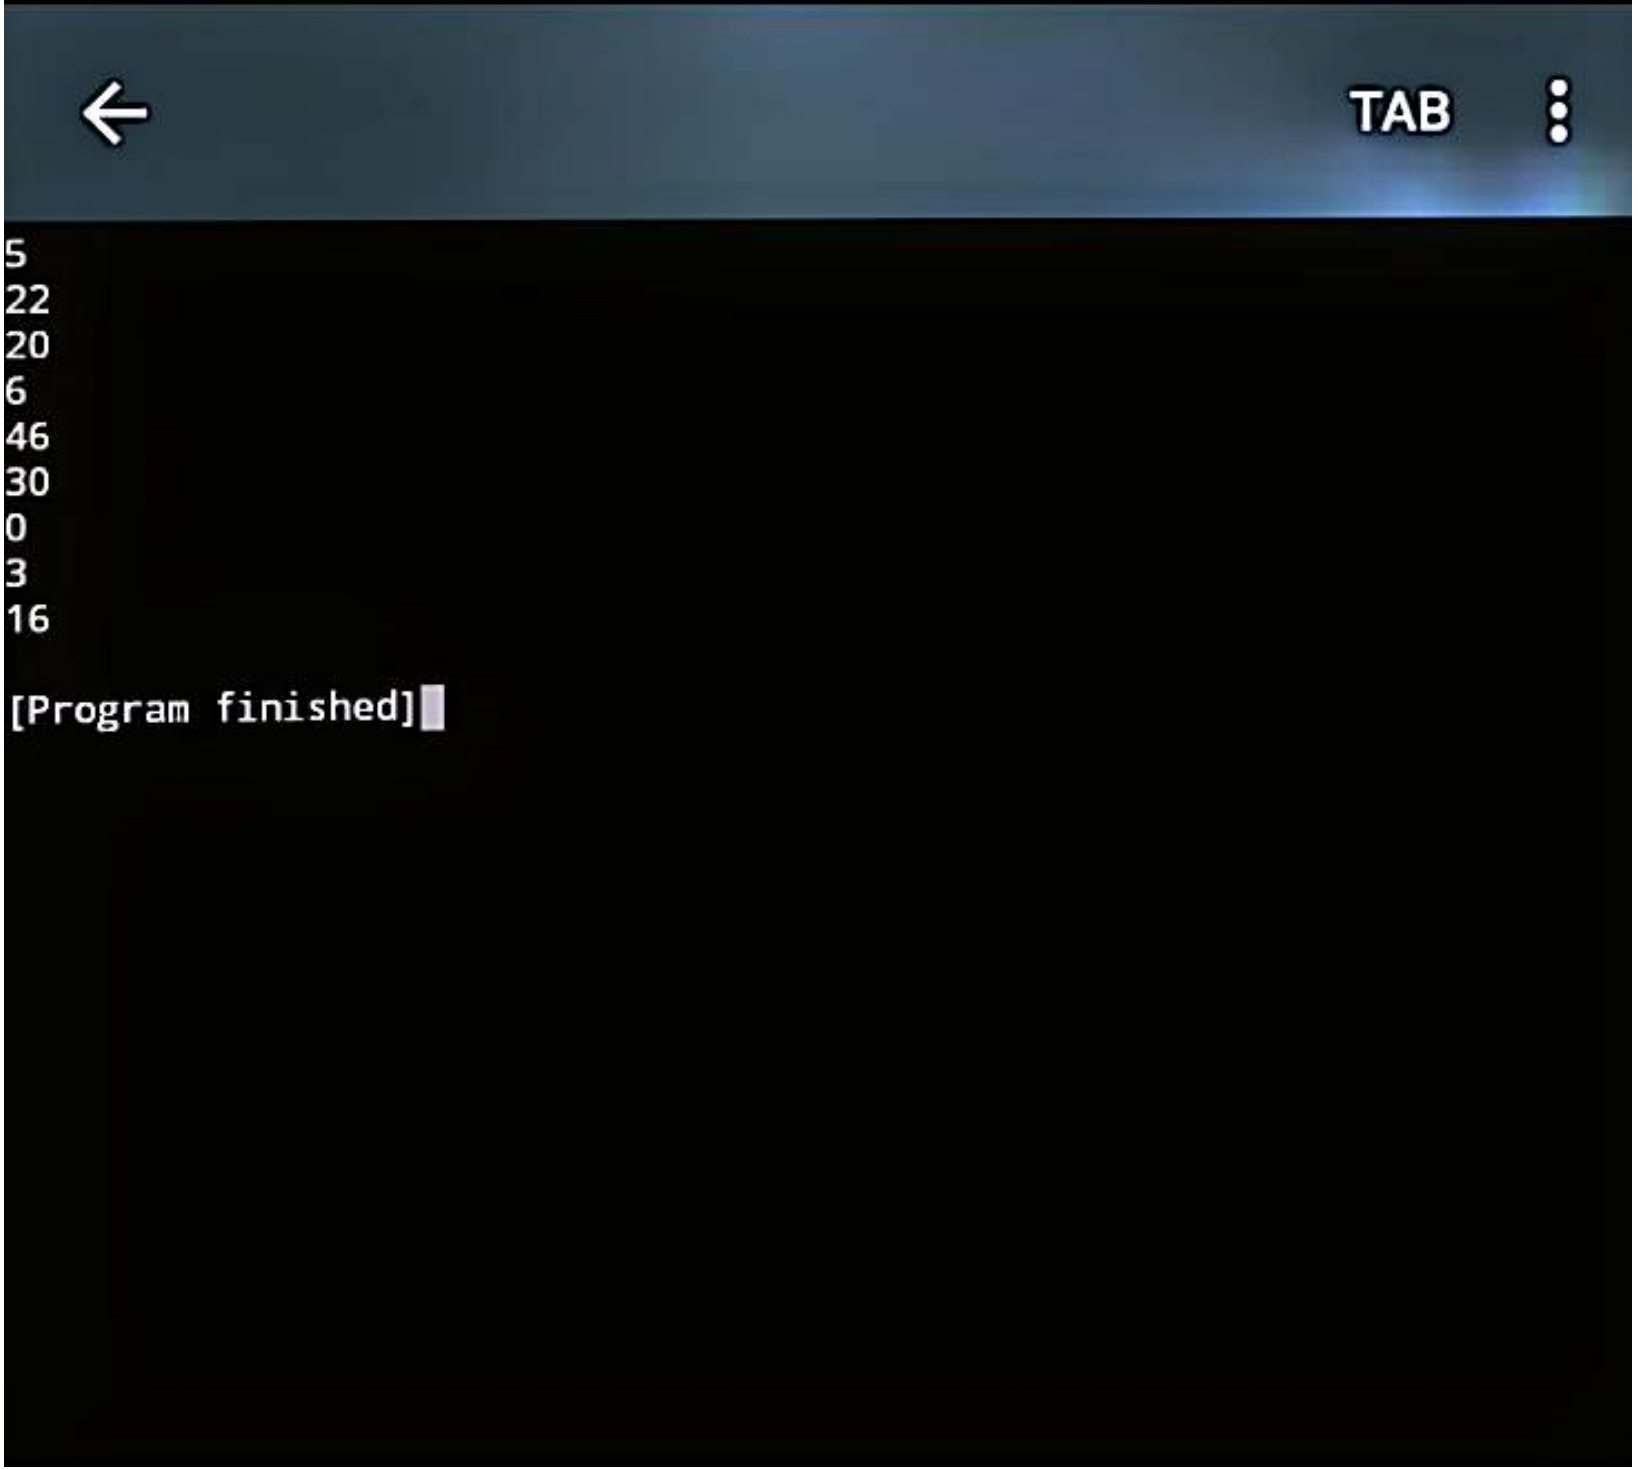

CamScanner

new*

```cpp
#include <iostream>
using namespace std;


int main() {
    int units;
    float mass;
    double weight;

    units = 10;
    mass = 5.5;
    weight = mass * units;

    cout << "Units = " << units << endl;
    cout << "Mass = " << mass << endl;
    cout << "Weight = " << weight << endl;

    return 0;
}
```

CamScanner

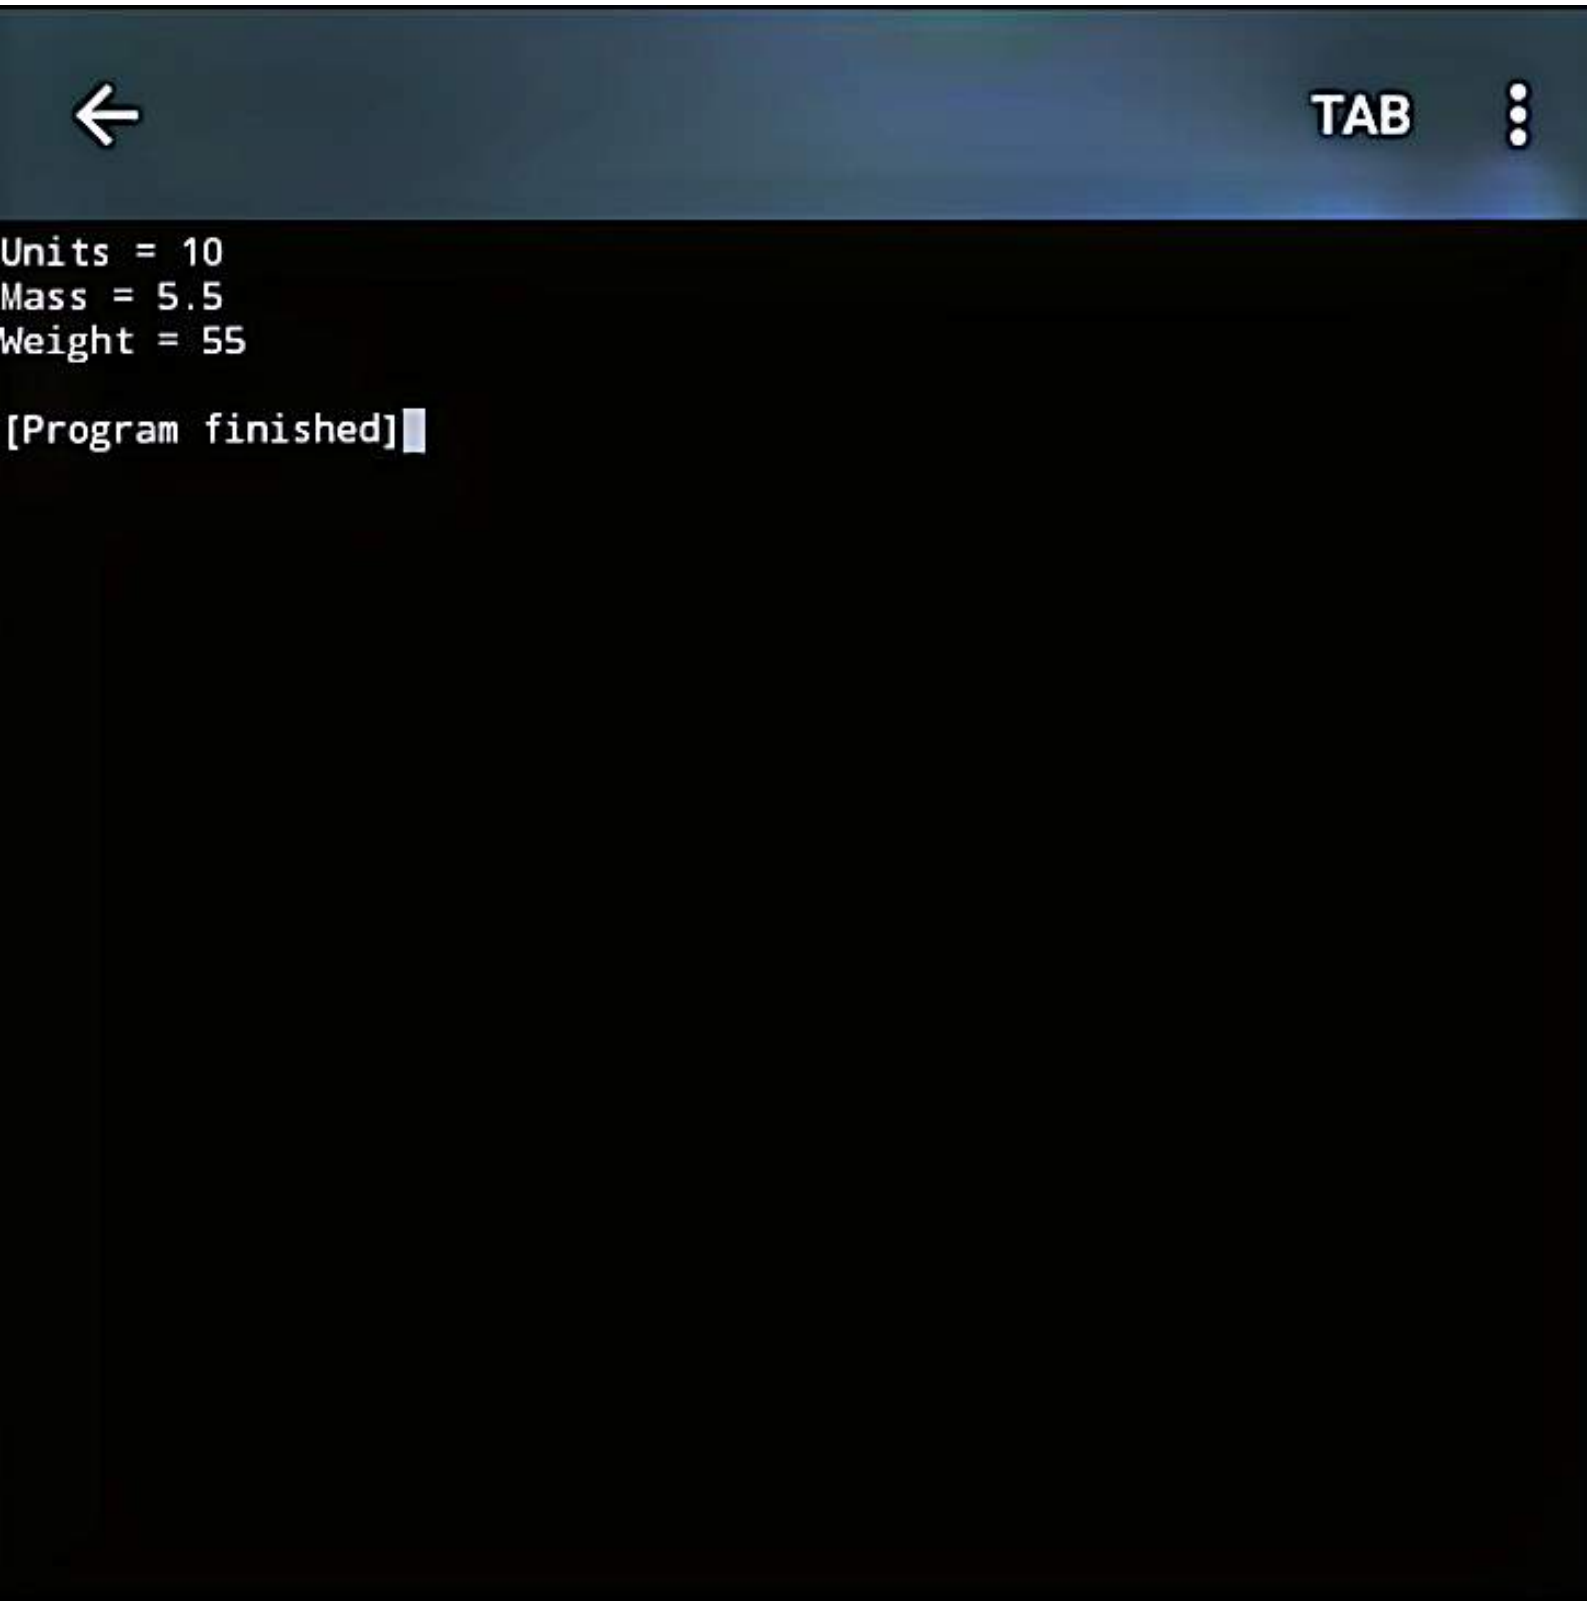

CamScanner

new*

```cpp
#include <iostream>
using namespace std;


int main()
{
    int a, b = 2;
    float c = 4.2;

    a = b * c;

    cout << "Value of a = " << a << endl;

    return 0;
}
```

CamScanner

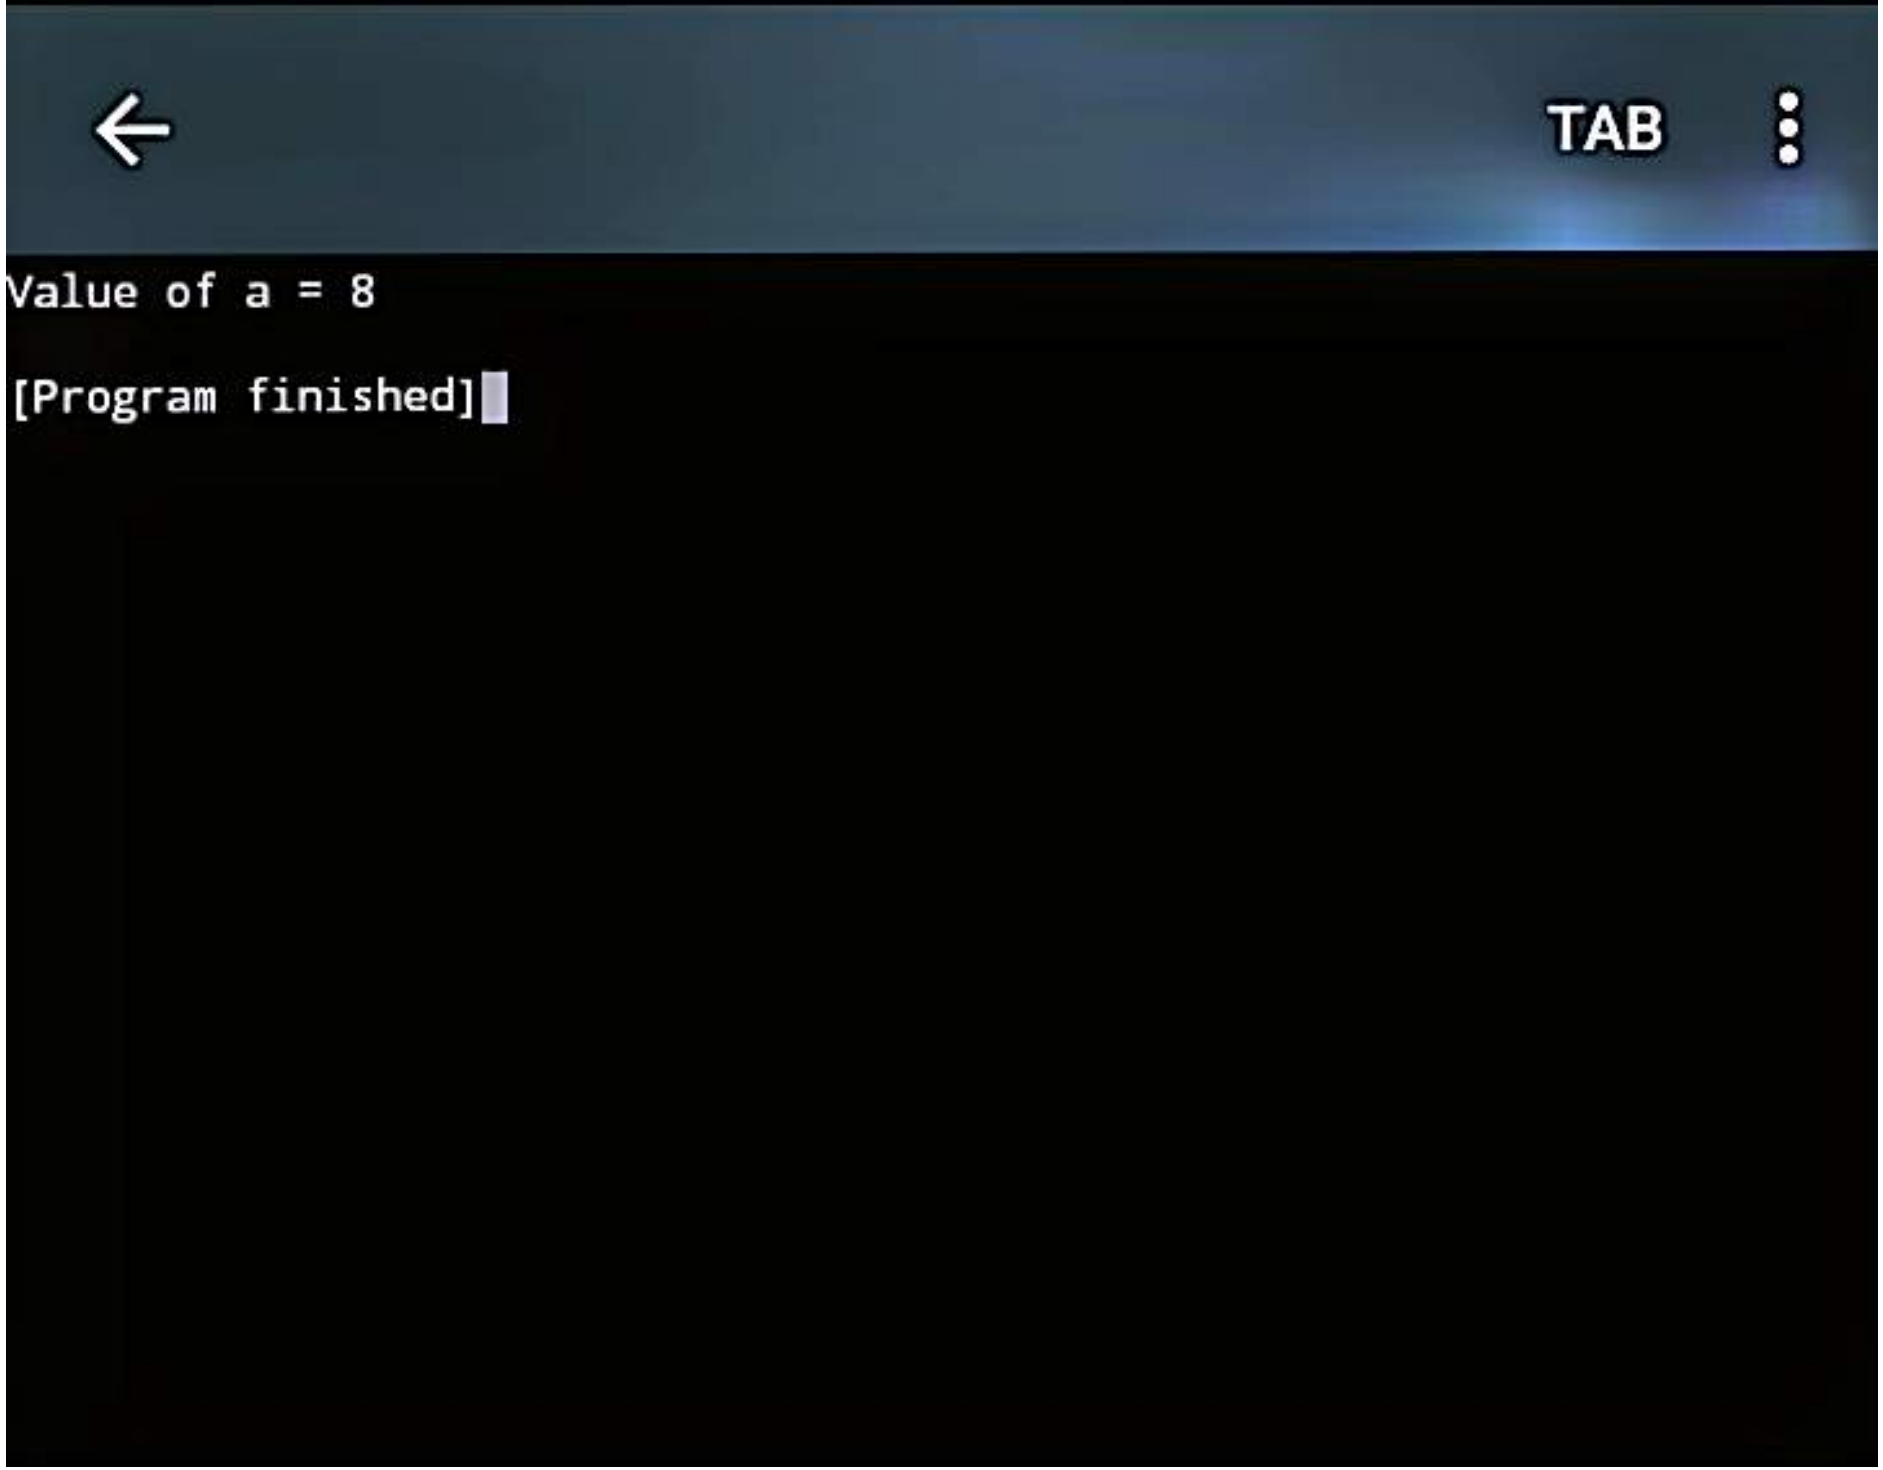

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    int qty, salesReps;
    float unitsEach;

    cout << "Enter quantity: ";
    cin >> qty;

    cout << "Enter number of sales representatives: ";
    cin >> salesReps;

    unitsEach = static_cast<float>(qty) / salesReps;

    cout << "Units each = " << unitsEach << endl;

    return 0;
}
```


CamScanner


TAB
Enter quantity: 10 4
Enter number of sales representatives: Units each = 2.5
[Program finished]

CamScanner

```
4  using namespace std;
5
6  int main()
7  {
8      srand(time(0));
9
10     int num1 = rand() % 900 + 100;
11     int num2 = rand() % 900 + 100;
12     int answer;
13
14     cout << num1 << endl;
15     cout << "+ " << num2 << endl;
16     cout << "-----" << endl;
17
18     cin.get();
19
20     answer = num1 + num2;
21
22     cout << num1 << endl;
23     cout << "+ " << num2 << endl;
24     cout << "-----" << endl;
25     cout << answer << endl;
26
27     return 0;
28 }
```

CamScanner

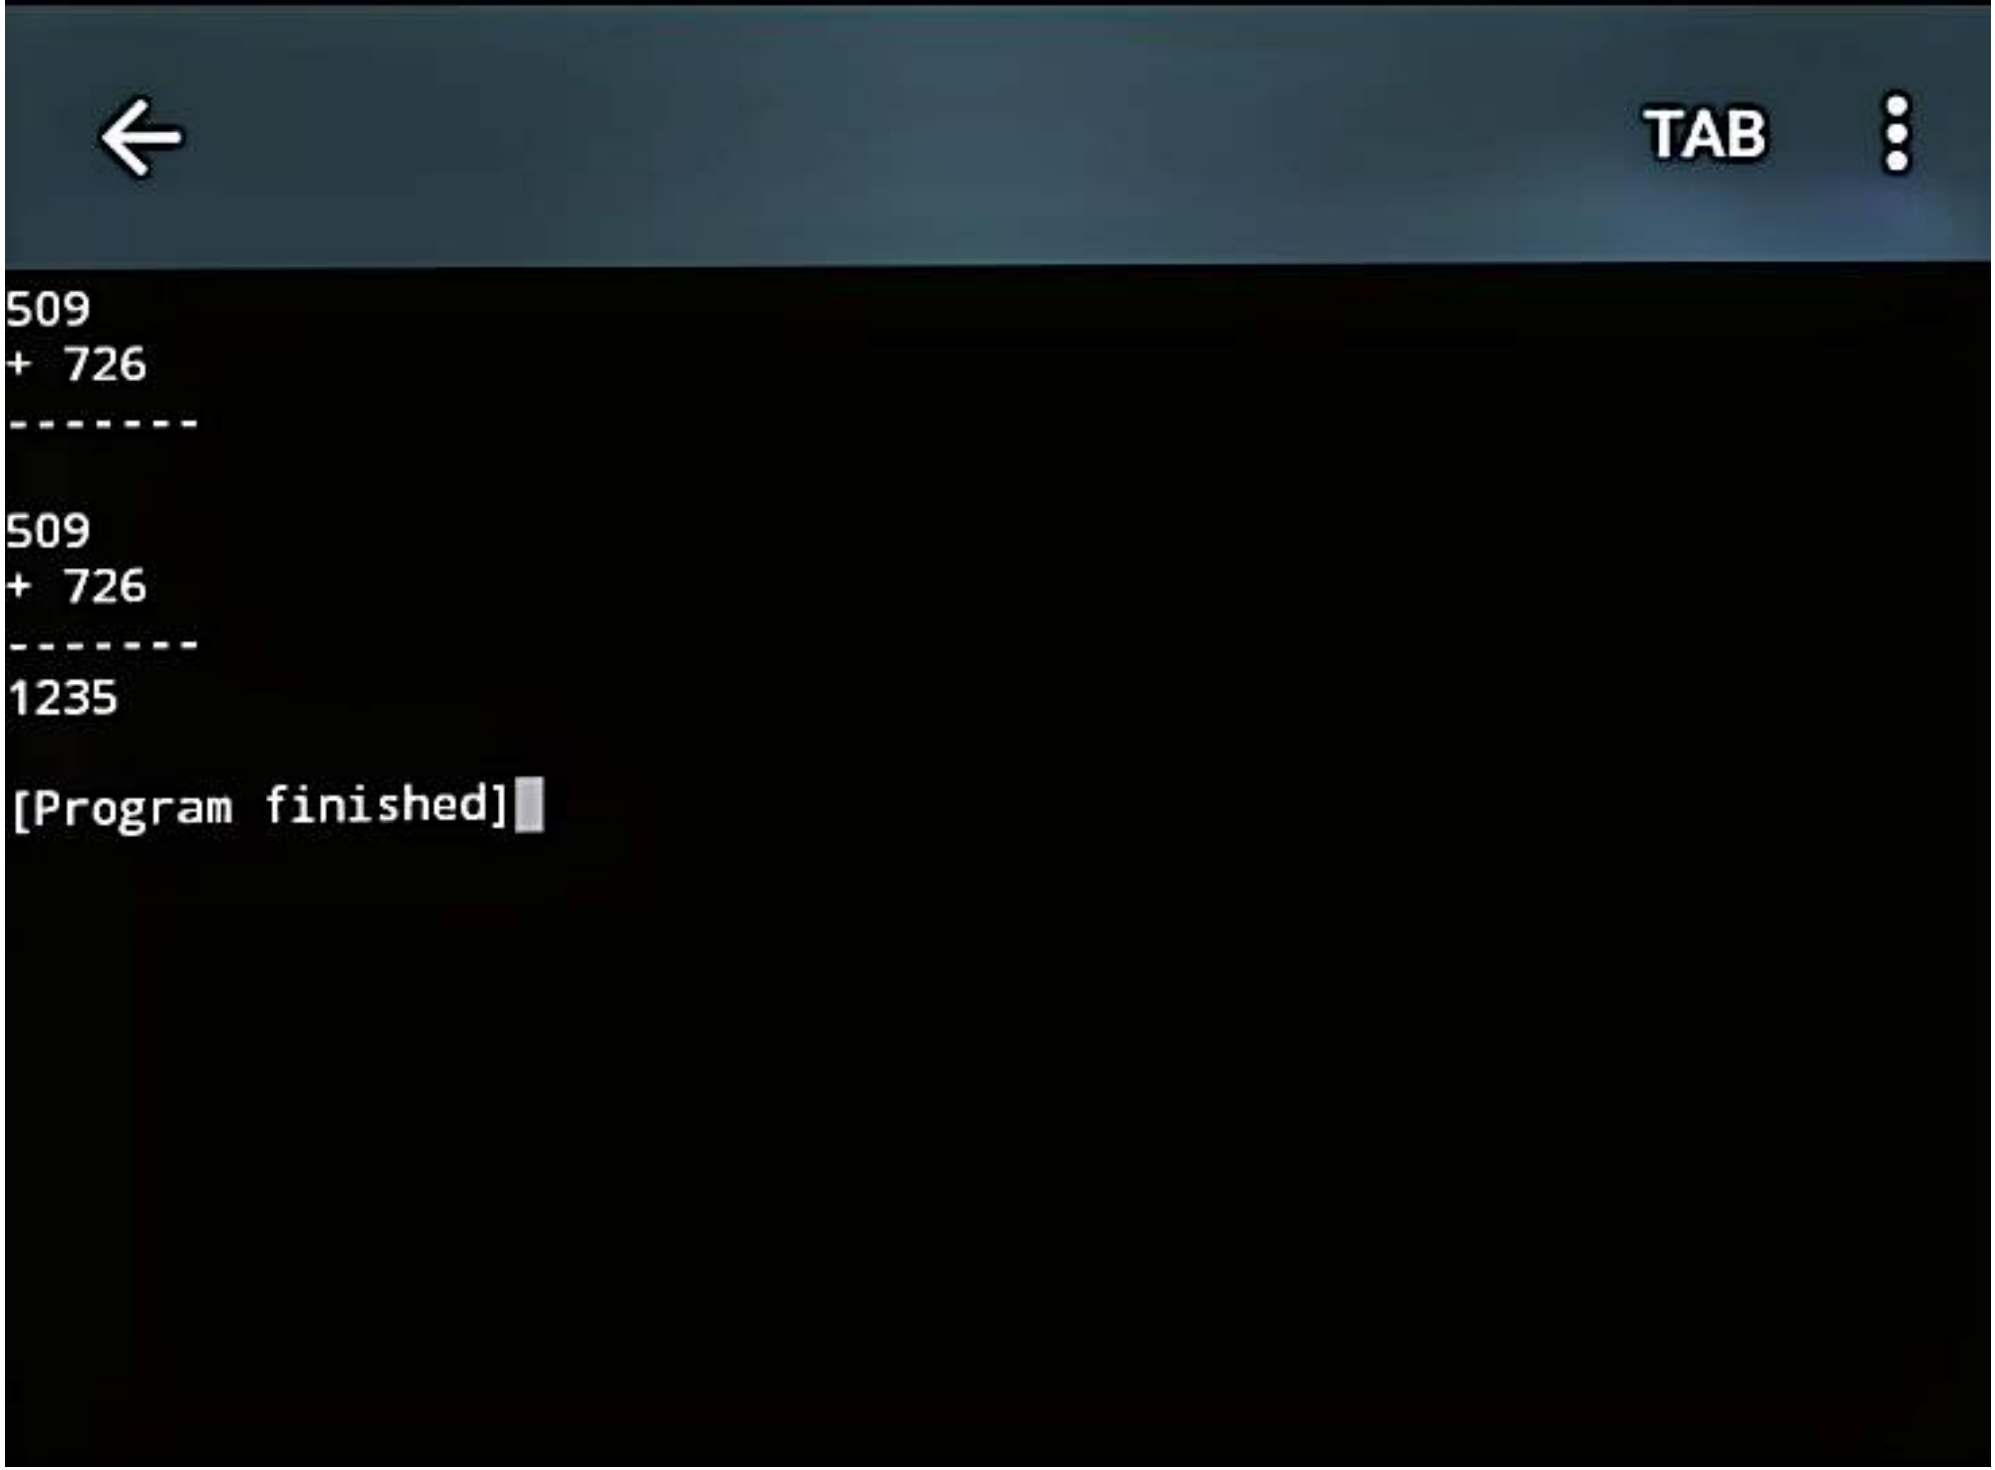

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    double number1, number2, sum;

    cout << "Enter a number: ";
    cin >> number1;


    cout << "Enter another number: ";
    cin >> number2;

    sum = number1 + number2;

    cout << "The sum of the two numbers is "
        << sum << endl;

    return 0;
}
```

CamScanner

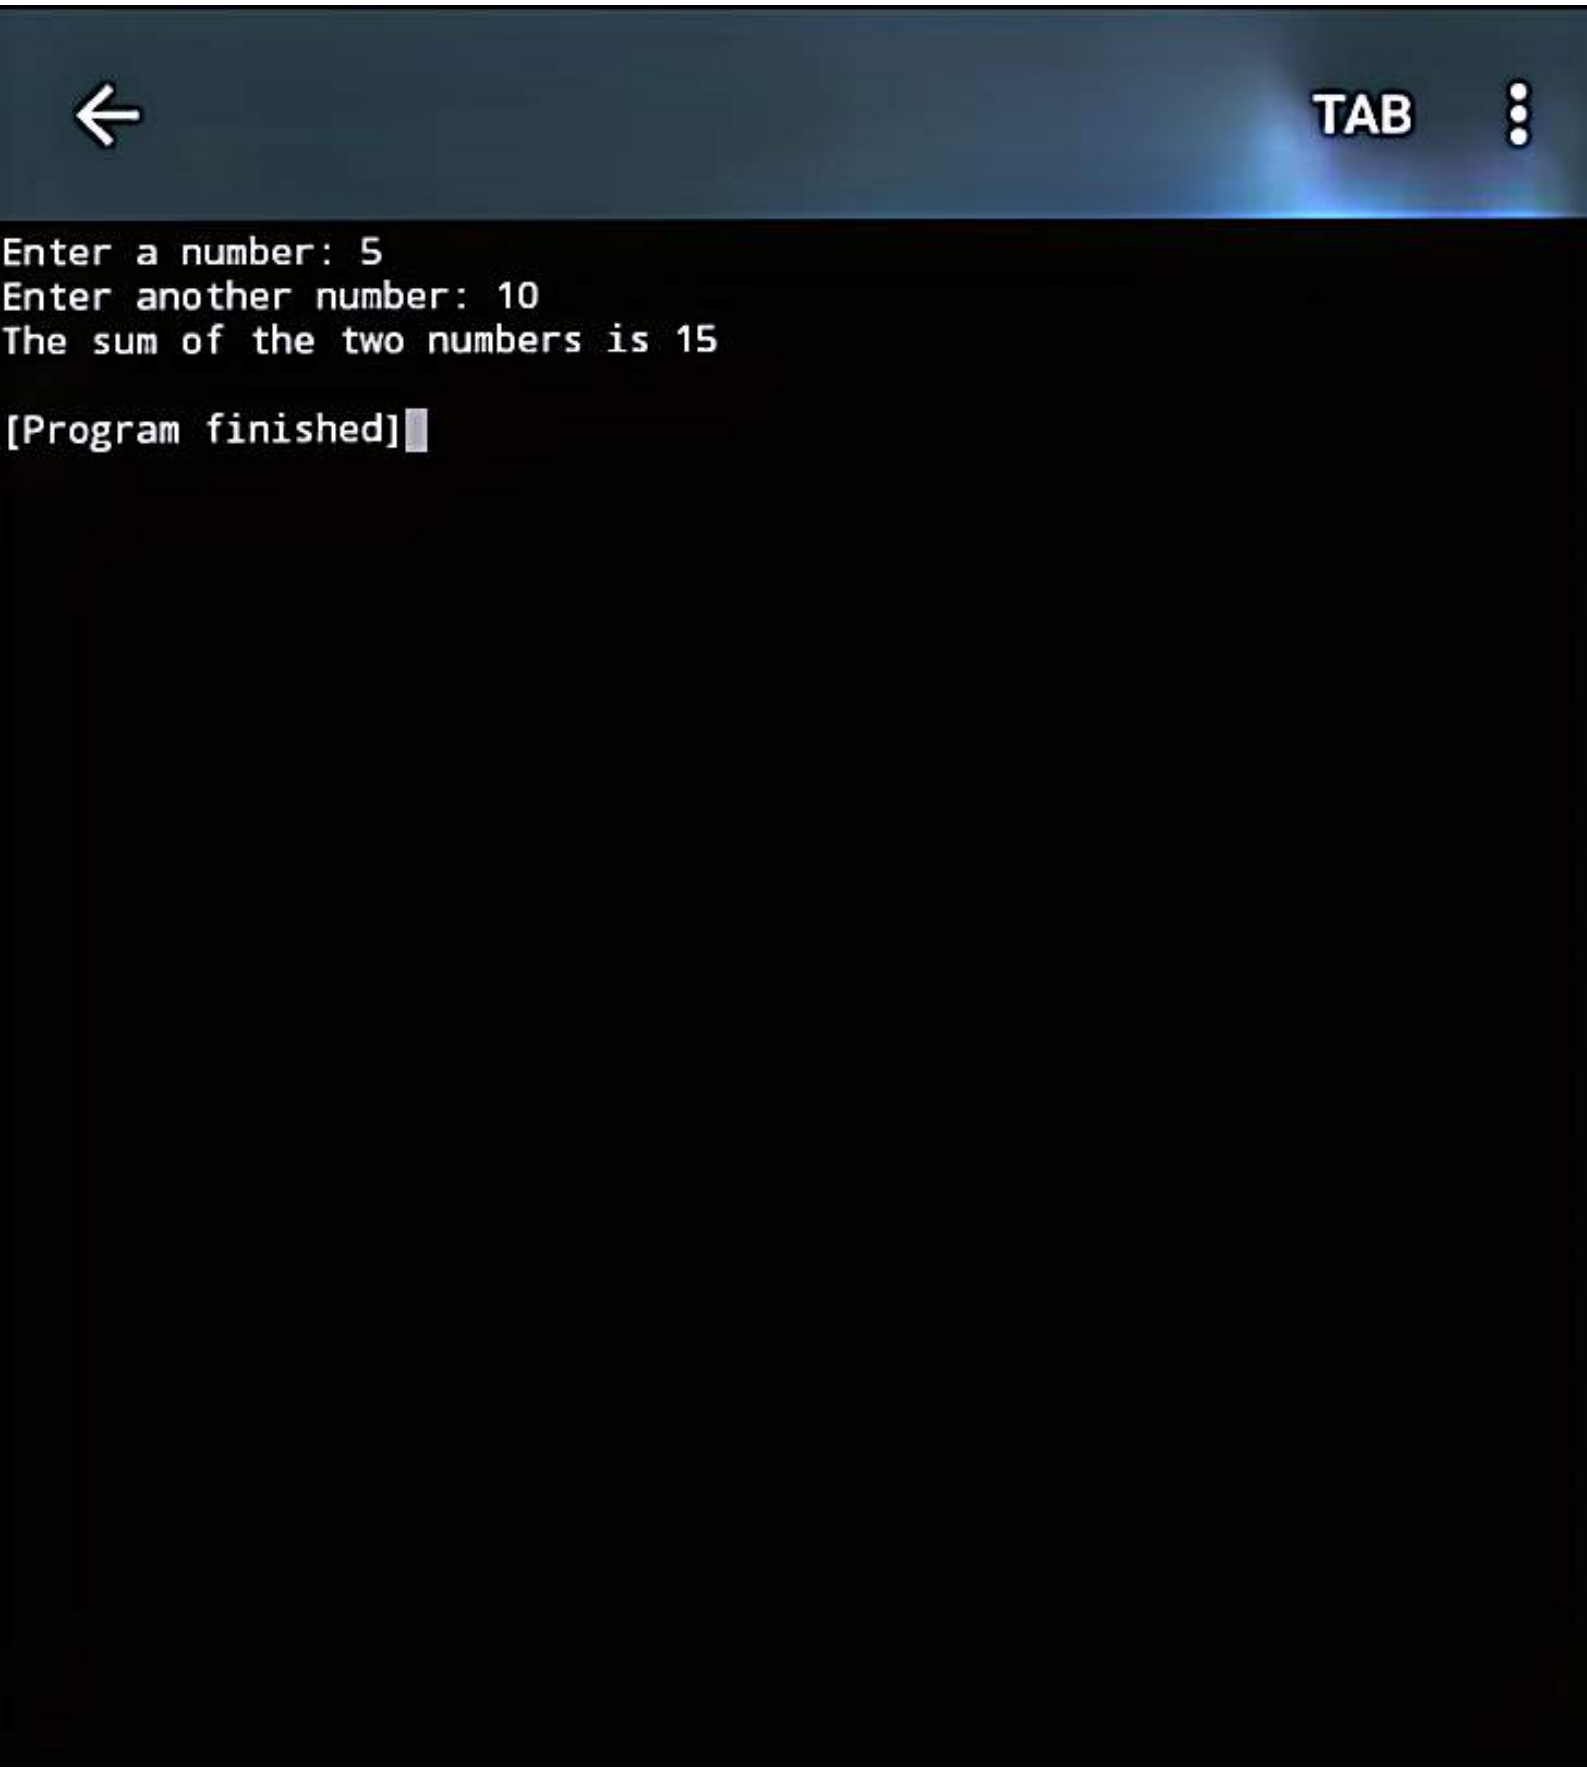
TAB
Enter a number: 5
Enter another number: 10
The sum of the two numbers is 15
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    int number1, number2;
    float quotient;

    cout << "Enter two numbers and I will divide\n";
    cout << "The first by the second for you.\n";


    cin >> number1 >> number2;

    quotient = static_cast<float>(number1) /
number2;

    cout << quotient << endl;

    return 0;
}
```

CamScanner

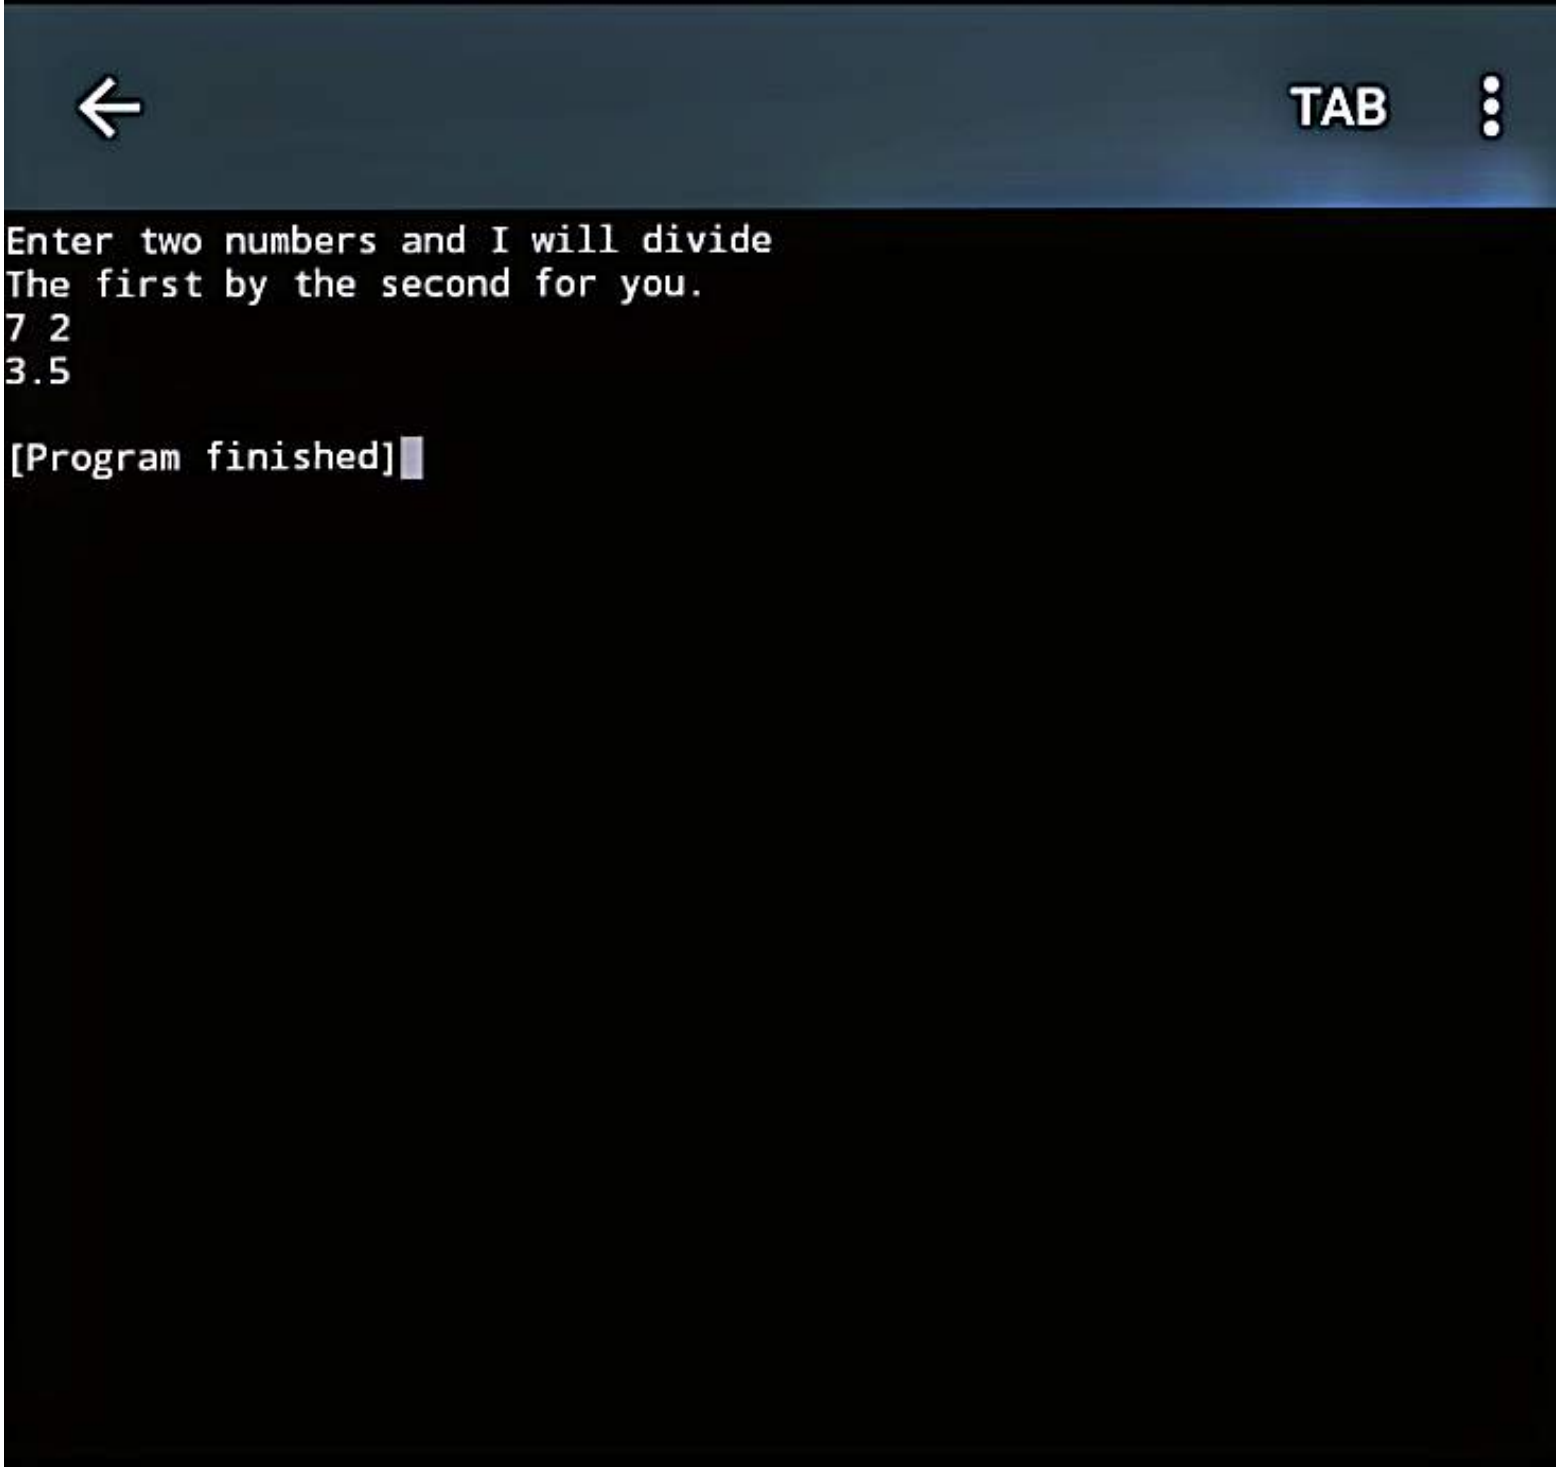
TAB
Enter two numbers and I will divide
The first by the second for you.
7 2
3.5
[Program finished]

CamScanner

new*

```cpp
#include <iostream>
using namespace std;


int main()
{
    int a = 28, b = 32, c = 37, d = 24, e = 33;
    int sum;
    float average;

    sum = a + b + c + d + e;
    average = sum / 5.0;

    cout << "Sum = " << sum << endl;
    cout << "Average = " << average << endl;

    return 0;
}
```

CamScanner

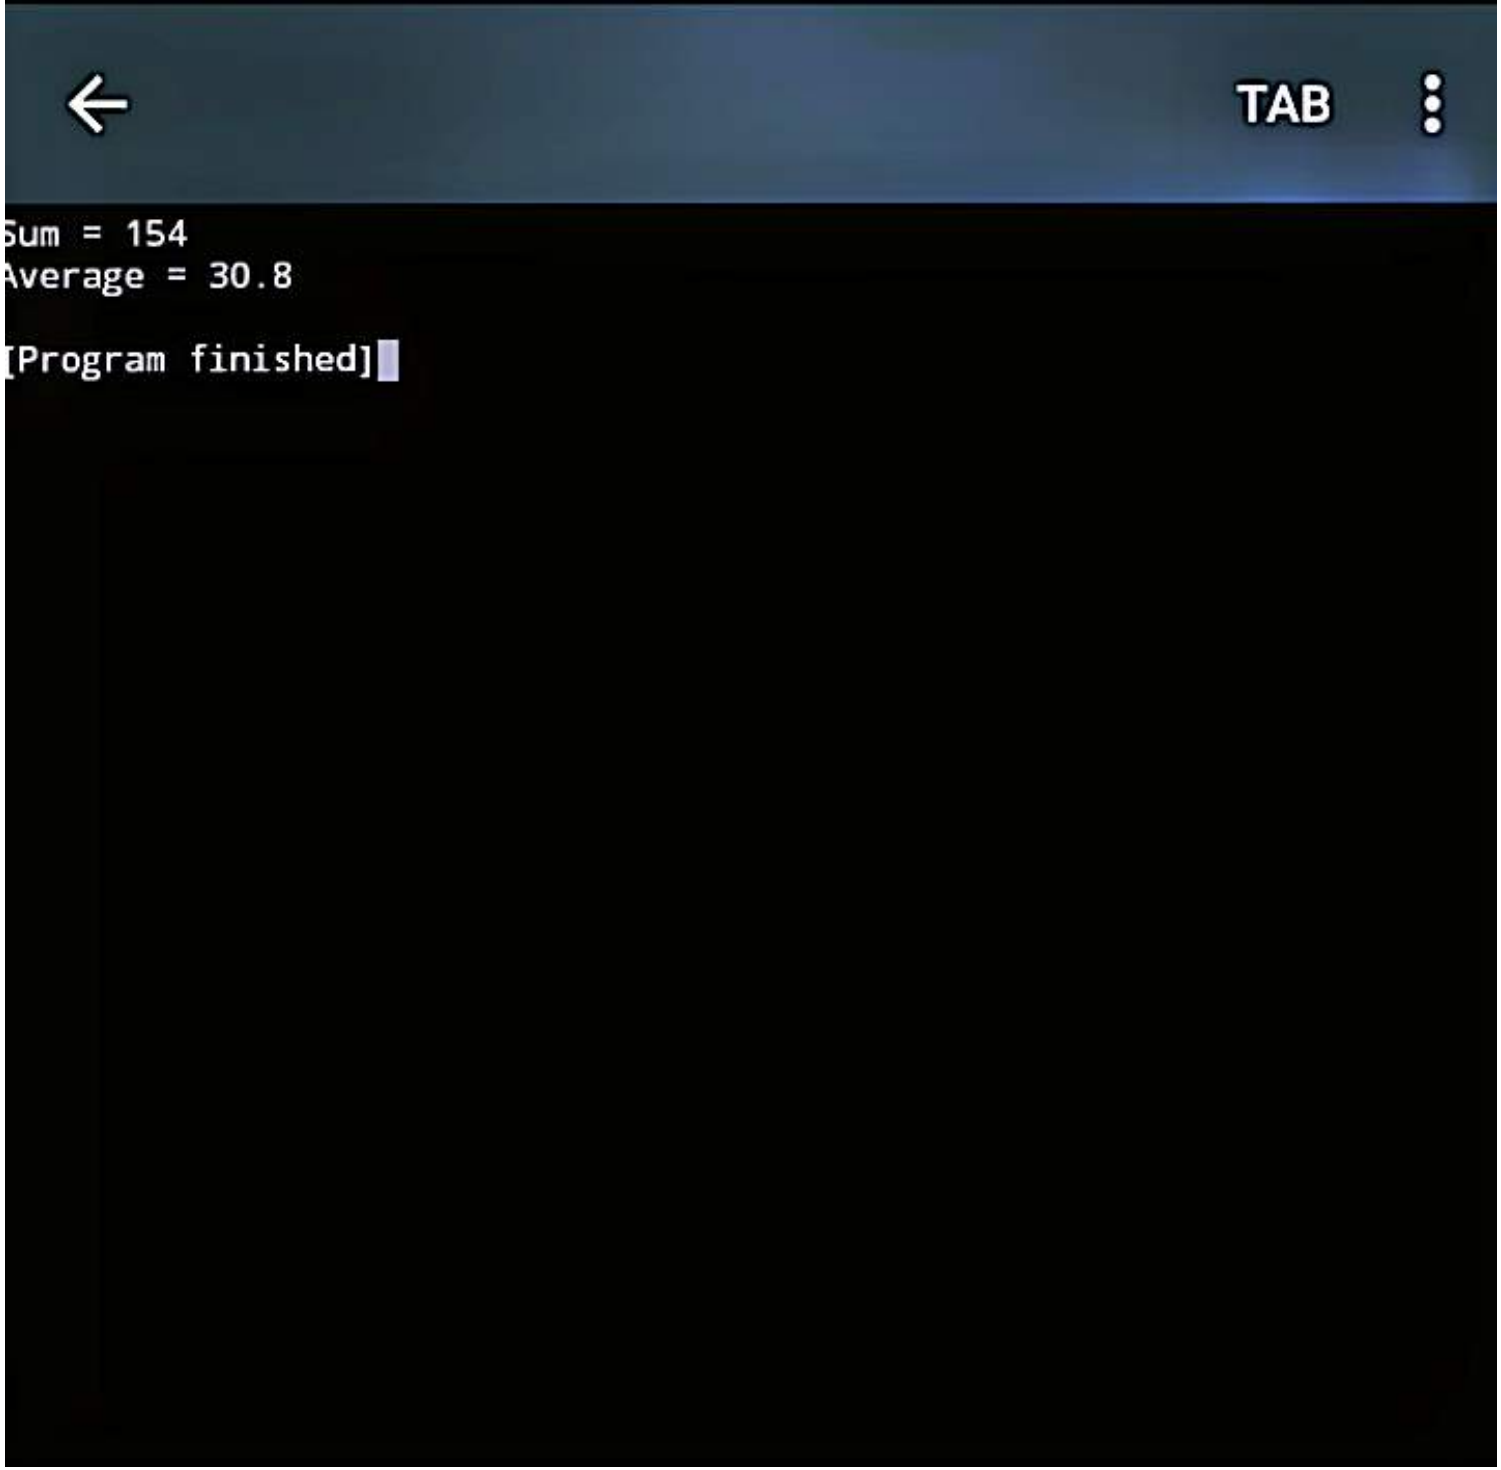

CamScanner