



1. Configure VPC peering in cross regions

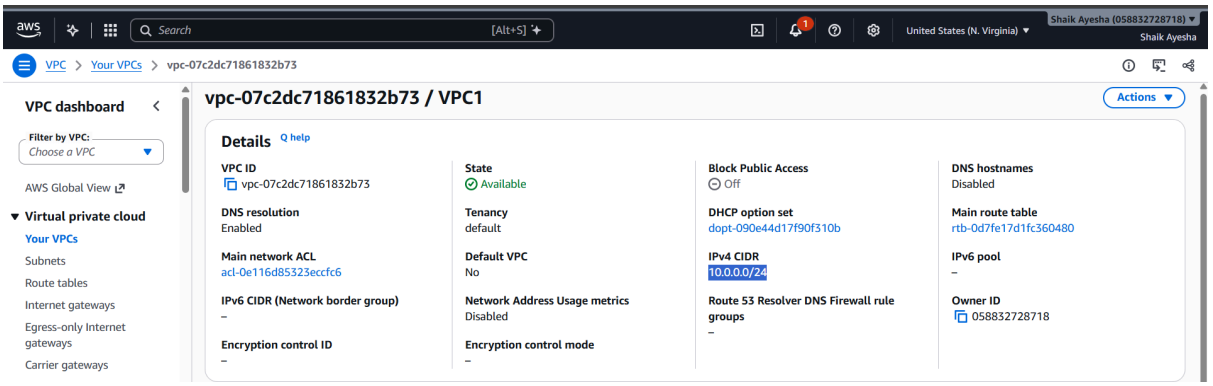

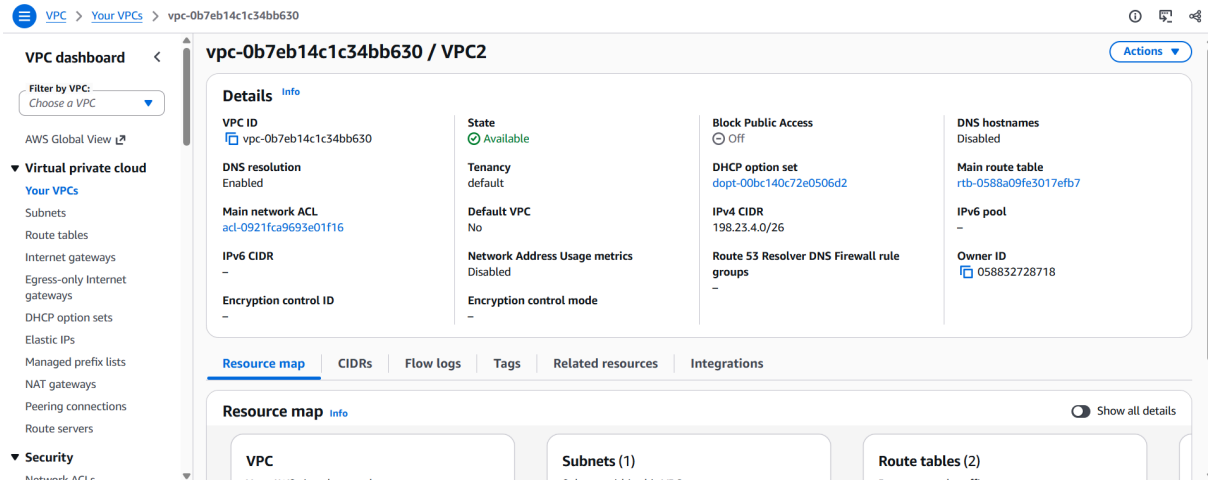

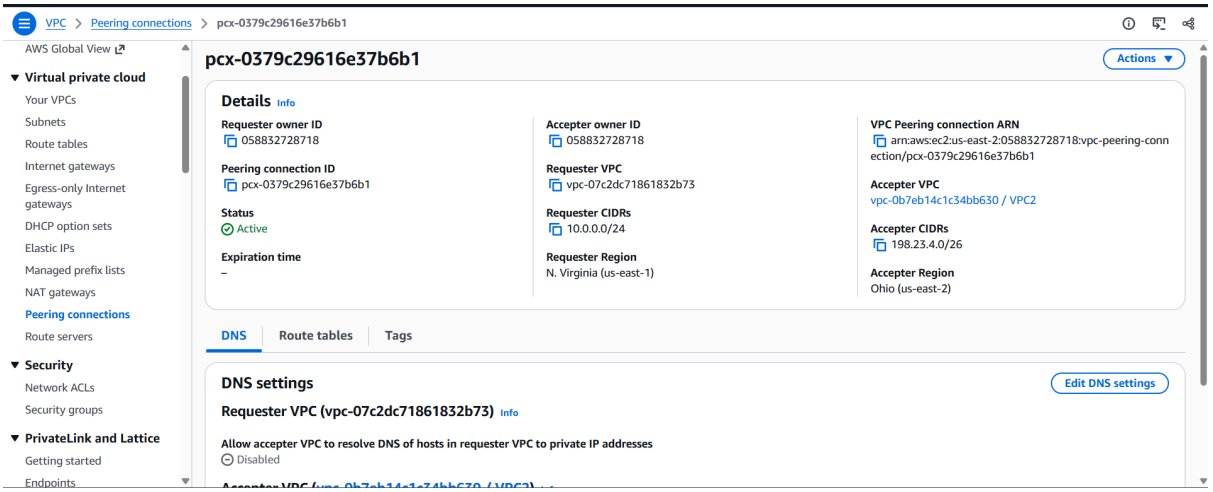

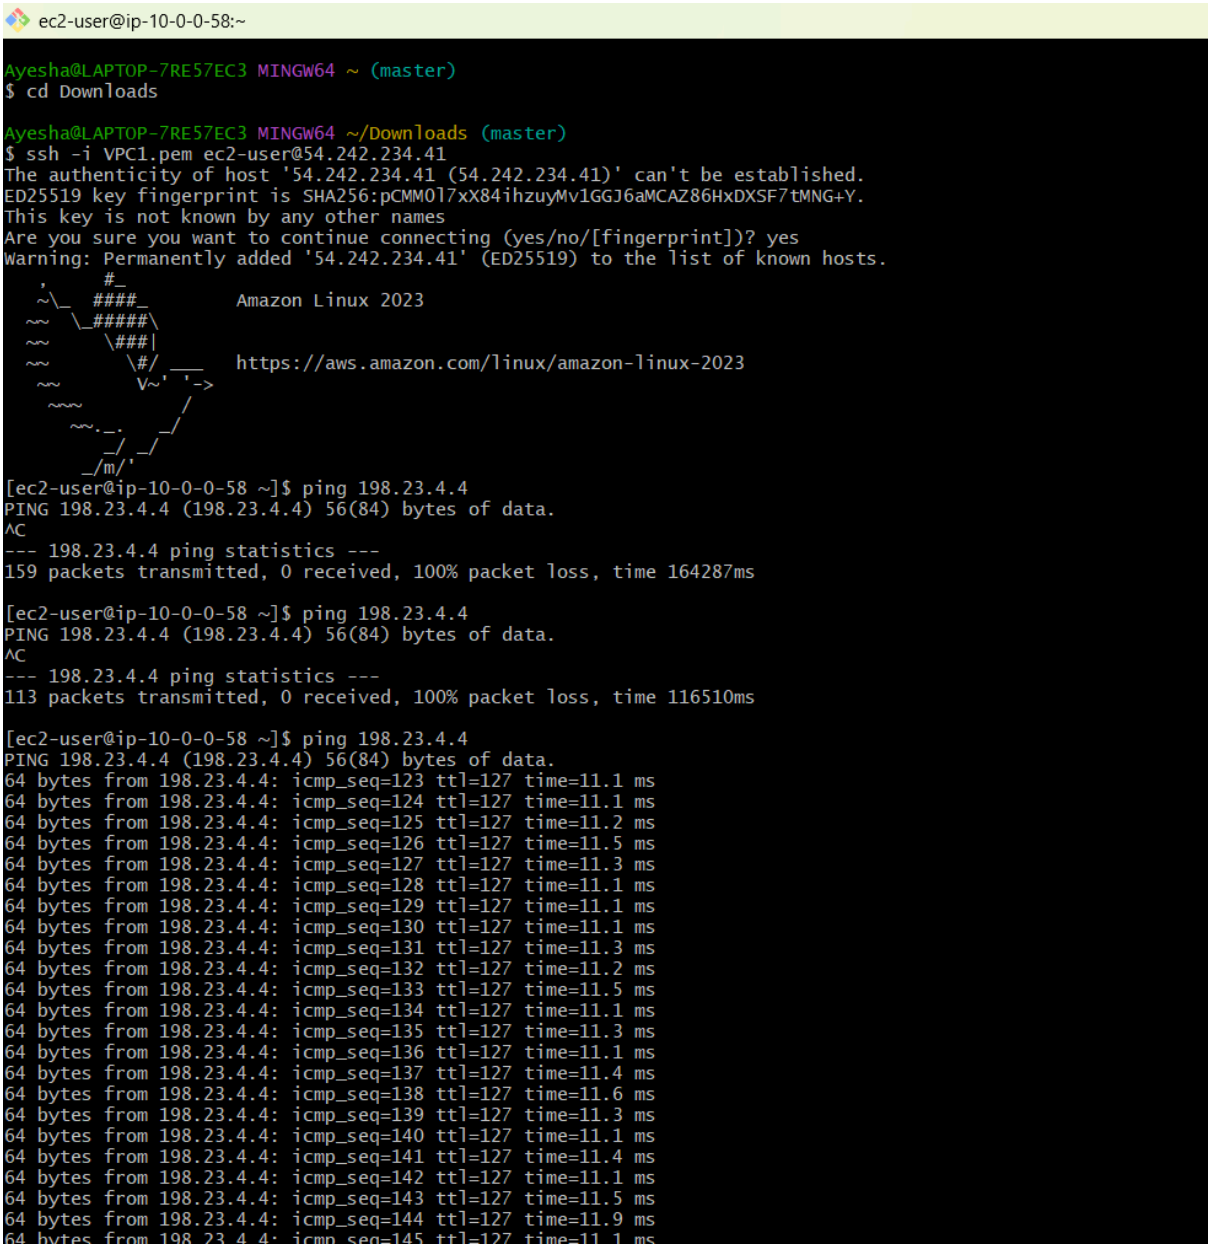

Step 1: Create VPC 1

1. I opened the AWS Management Console.
2. I selected the first AWS Region.
3. I navigated to VPC → Your VPCs.
4. I clicked Create VPC.
5. I entered the VPC name and IPv4 CIDR block.
6. I created VPC 1.

Step 2: Create VPC 2

1. I switched to another AWS Region.
2. I navigated to VPC → Your VPCs.
3. I clicked Create VPC.
4. I entered the VPC name and a non-overlapping IPv4 CIDR block.
5. I created VPC 2.

Step 3: Create Subnets

1. I created the required subnets in both VPCs.
2. I ensured that the subnet CIDR blocks were within their respective VPC CIDR ranges.
3. I created the subnets.

Step 4: Launch EC2 Instances

1. I launched one public EC2 instance in VPC 1.
2. I launched one private EC2 instance in VPC 2.
3. I attached the appropriate security groups.
4. I noted down both EC2 instances' private IP addresses.

Step 5: Create VPC Peering Connection

1. I switched to VPC 1's Region.
2. I navigated to VPC → Peering connections.
3. I clicked Create peering connection.
4. I selected VPC 1 as the requester.
5. I selected Another Region.
6. I entered VPC 2's Region and VPC ID.
7. I created the peering connection.

Step 6: Accept Peering Request

1. I switched to VPC 2's Region.
2. I navigated to VPC → Peering connections.
3. I selected the pending peering request.
4. I accepted the peering request.
5. I verified that the peering connection status was Active.

Step 7: Configure VPC 1 Route Table

1. I navigated to VPC → Route tables.
2. I selected the route table associated with VPC 1's EC2 subnet.

3. I clicked Edit routes.
4. I added a route with VPC 2's CIDR block as the destination.
5. I selected the VPC Peering Connection as the target.
6. I saved the changes.

Step 8: Configure VPC 2 Route Table

1. I navigated to VPC → Route tables.
2. I selected the route table associated with VPC 2's EC2 subnet.
3. I clicked Edit routes.
4. I added a route with VPC 1's CIDR block as the destination.
5. I selected the VPC Peering Connection as the target.
6. I saved the changes.

Step 9: Configure VPC 1 Security Group

1. I navigated to EC2 → Security Groups.
2. I selected the security group attached to VPC 1's EC2 instance.
3. I added an inbound SSH rule.
4. I configured port 22 with My IP as the source.
5. I saved the rules.

Step 10: Configure VPC 2 Security Group

1. I navigated to EC2 → Security Groups.
2. I selected the security group attached to VPC 2's private EC2 instance.
3. I added an inbound SSH rule with port 22 and VPC 1's CIDR as the source.
4. I added an All ICMP - IPv4 rule with VPC 1's CIDR as the source.
5. I allowed outbound traffic.
6. I saved the rules.

Step 11: Test Connectivity

1. I connected to VPC 1's public EC2 instance using SSH.
2. I tested connectivity to VPC 2's private EC2 instance using its private IP address.

```
None
ping <VPC2-private-IP>
```

3. I tested SSH connectivity to VPC 2's private EC2 instance.


```
None
ssh -i key.pem ec2-user@<VPC2-private-IP>
```

4. I verified the connectivity between the instances.

Step 12: Verify Configuration


1. I verified that the VPC peering connection status was Active.
2. I checked the routes in both VPC route tables.
3. I verified the security group inbound and outbound rules.
4. I checked the network ACL rules.
5. I verified private IP communication between both EC2 instances.

2. Purchase one domain from GoDaddy

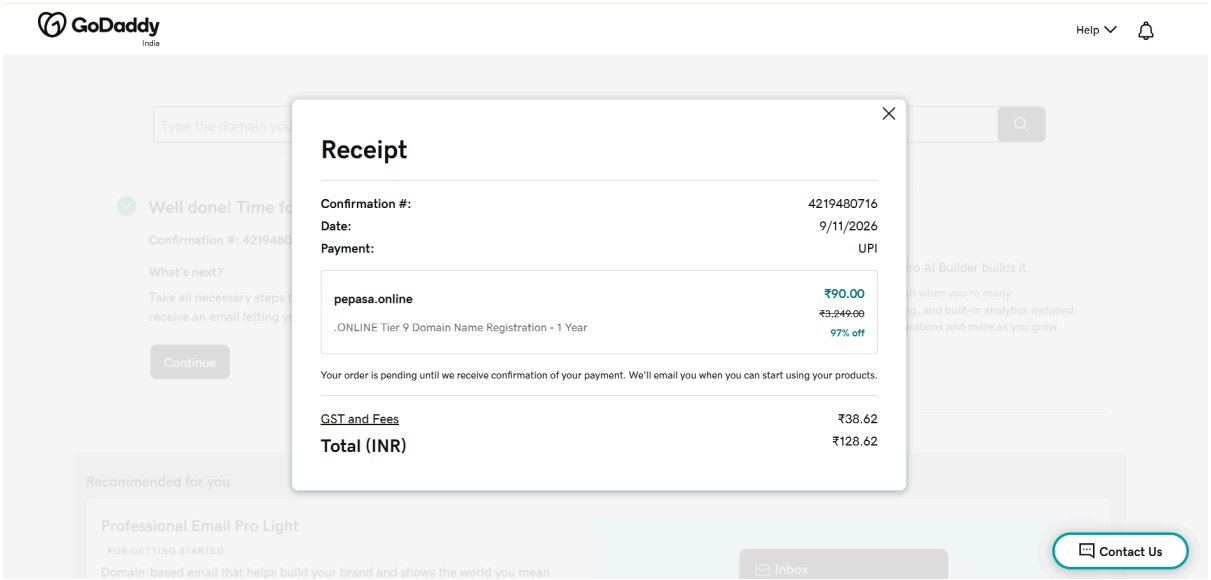

1. I opened the GoDaddy India website.
2. I searched for the domain name pepasa.online.
3. I checked the domain availability.
4. I selected the .online domain extension.
5. I added the domain to my cart.
6. I proceeded to checkout.
7. I selected UPI as the payment method.
8. I completed the payment of ₹128.62, including GST.
9. I received the order confirmation from GoDaddy.
10. I verified the domain registration status in my GoDaddy account.

3. Deploy static website in S3

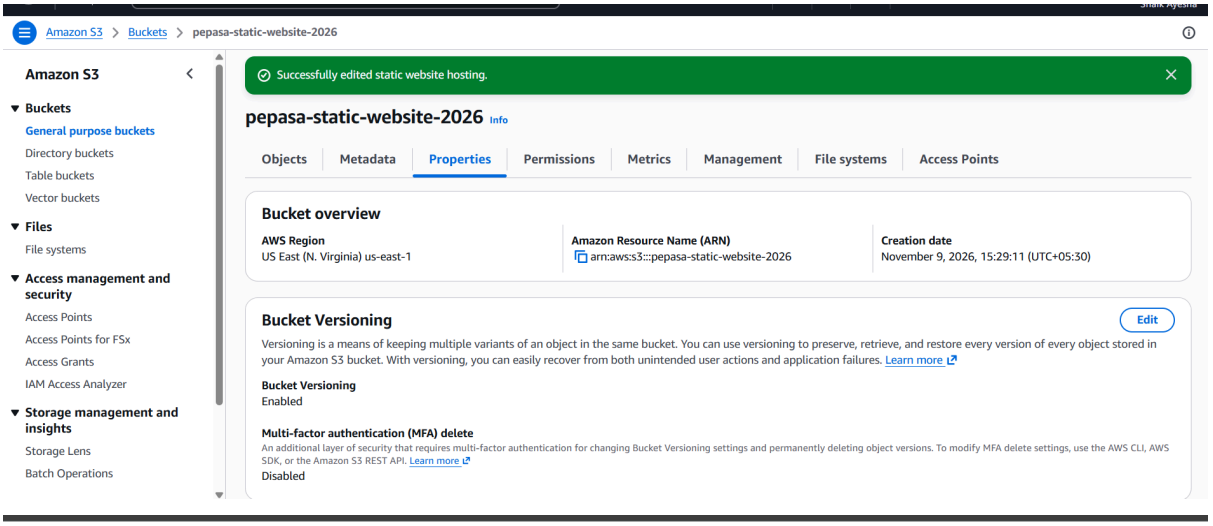



Step 1: Create an S3 Bucket

1. I logged in to the AWS Management Console.
2. I searched for Amazon S3.
3. I navigated to Buckets.
4. I clicked Create bucket.
5. I selected the AWS Region.
6. I entered a globally unique bucket name.
7. I enabled ACLs under Object Ownership.
8. I disabled Block all public access.
9. I acknowledged the public access warning.
10. I clicked Create bucket.

Step 2: Create the Website File

1. I opened Notepad.
2. I created a new HTML file.
3. I added the website content.
4. I saved the file as index.html.
5. I selected All Files as the file type.
6. I saved the file on my computer.

Step 3: Upload the HTML File

1. I opened the created S3 bucket.
2. I navigated to the Objects tab.
3. I clicked Upload.
4. I clicked Add files.
5. I selected index.html.
6. I clicked Upload.
7. I verified that the upload was successful.

Step 4: Configure Bucket Permissions

1. I opened the Permissions tab.
2. I checked Block Public Access settings.
3. I disabled Block all public access.
4. I saved the changes.
5. I navigated to Bucket policy.
6. I clicked Edit.
7. I added the following bucket policy, replacing the bucket name with my actual bucket name.

```
None

{
 "Version": "2012-10-17",
 "Statement": [
   {
    "Sid": "PublicReadGetObject",
    "Effect": "Allow",
    "Principal": "*",
    "Action": "s3:GetObject",
    "Resource": "arn:aws:s3:::YOUR_BUCKET_NAME/*"
   }
```

```
  ]
}
```

8. I saved the bucket policy.


Step 5: Enable Static Website Hosting

1. I opened the Properties tab.
2. I scrolled down to Static website hosting.
3. I clicked Edit.
4. I selected Enable.
5. I selected Host a static website.
6. I entered index.html as the Index document.
7. I clicked Save changes.

Step 6: Access the Website

1. I navigated to the Properties tab.
2. I scrolled down to Static website hosting.
3. I copied the Bucket website endpoint.
4. I opened the endpoint in a new browser tab.
5. I verified that the website was accessible.

4. Create a CDN and attach one SSL certificate.

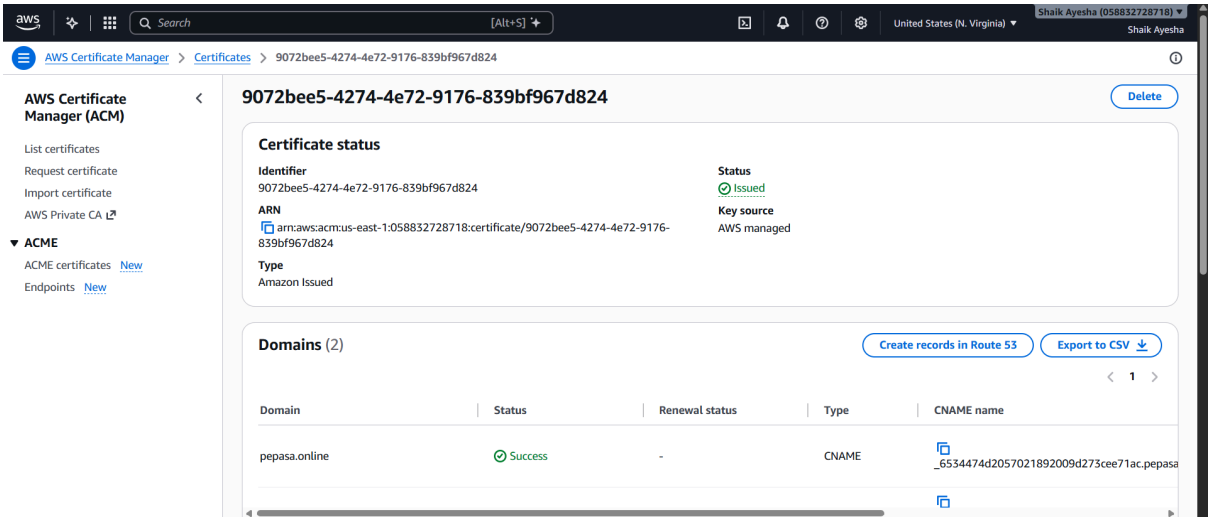

Step 1: Request an SSL Certificate

1. I opened AWS Certificate Manager (ACM).
2. I selected the US East (N. Virginia) – us-east-1 Region.
3. I clicked Request a certificate.
4. I selected Request a public certificate.
5. I entered pepasa.online as the domain name.
6. I added www.pepasa.online as an additional domain.
7. I selected DNS validation.
8. I selected RSA 2048 as the key algorithm.
9. I clicked Request.

Step 2: Configure DNS Validation in GoDaddy

1. I opened the requested certificate in ACM.
2. I navigated to the Domains section.
3. I copied the CNAME name and CNAME value for pepasa.online.
4. I copied the CNAME name and CNAME value for www.pepasa.online.
5. I logged in to my GoDaddy account.
6. I opened Domain Portfolio → pepasa.online → DNS.
7. I clicked Add New Record.
8. I selected CNAME as the record type.
9. I entered the CNAME name and value provided by ACM.
10. I saved the DNS record.
11. I repeated the process for the second validation record.

Step 3: Verify SSL Certificate

1. I returned to AWS Certificate Manager.
2. I opened the requested certificate.
3. I refreshed the certificate status.
4. I waited for DNS validation to complete.
5. I verified that the certificate status changed to Issued.

Step 4: Create a CloudFront Distribution

1. I opened the AWS Management Console.
2. I searched for Amazon CloudFront.
3. I navigated to Distributions.
4. I clicked Create distribution.
5. I copied the S3 Static Website Hosting endpoint.

6. I entered the S3 website endpoint as the CloudFront origin domain.
7. I selected HTTP only as the origin protocol policy.
8. I selected Redirect HTTP to HTTPS as the viewer protocol policy.
9. I selected GET and HEAD as the allowed HTTP methods.


Step 5: Configure CloudFront Distribution Settings


1. I entered index.html as the Default root object.
2. I added pepasa.online as an Alternate domain name (CNAME).
3. I added www.pepasa.online as another Alternate domain name.
4. I selected the issued ACM SSL certificate.
5. I selected the recommended TLS security policy.
6. I kept IPv6 enabled.
7. I clicked Create distribution.


Step 6: Verify CloudFront Deployment

1. I opened CloudFront → Distributions.
2. I selected the created distribution.
3. I checked the distribution status.
4. I waited until the status changed to Enabled and deployment completed.
5. I copied the CloudFront distribution domain name.
6. I opened the distribution URL in a browser.
7. I verified that the static website was accessible through HTTPS.

5. Create a Route 53 hosted zone and map the domain with the CDN

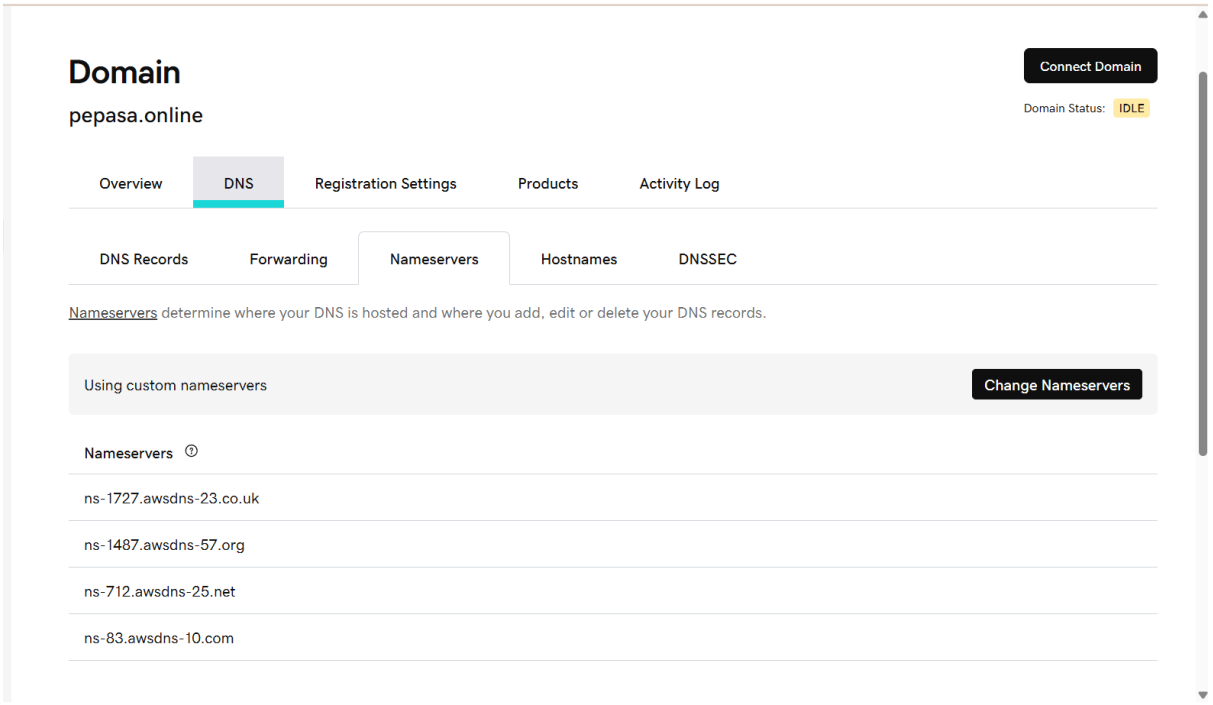
Domain
pepasa.online
Connect Domain
Domain Status: IDLE
Overview
DNS
Registration Settings
Products
Activity Log
DNS Records
Forwarding
Nameservers
Hostnames
DNSSEC
Nameservers determine where your DNS is hosted and where you add, edit or delete your DNS records.
Using custom nameservers
Change Nameservers
Nameservers
ns-1727.awsdns-23.co.uk
ns-1487.awsdns-57.org
ns-712.awsdns-25.net
ns-83.awsdns-10.com

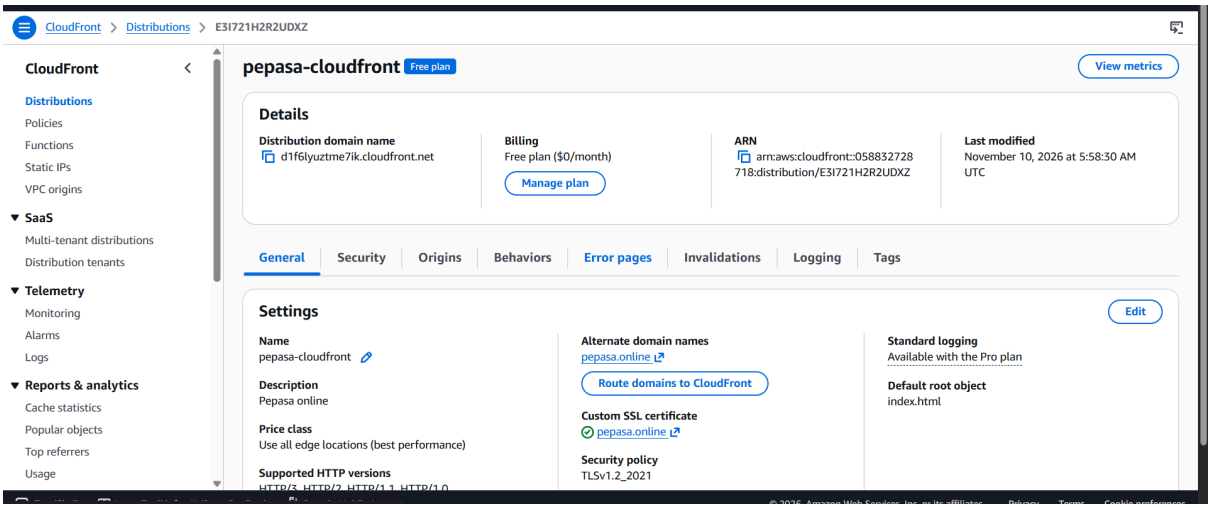
CloudFront > Distributions > E3I721H2R2UDXZ
CloudFront
Distributions
Policies
Functions
Static IPs
VPC origins
SaaS
Multi-tenant distributions
Distribution tenants
Telemetry
Monitoring
Alarms
Logs
Reports & analytics
Cache statistics
Popular objects
Top referrers
Usage
pepasa-cloudfront Free plan
View metrics
Details
Distribution domain name
d1f6lyuztme7ik.cloudfront.net
Billing
Free plan ($0/month)
Manage plan
ARN
arn:aws:cloudfront::058832728718:distribution/E3I721H2R2UDXZ
Last modified
November 10, 2026 at 5:58:30 AM UTC
General
Security
Origins
Behaviors
Error pages
Invalidations
Logging
Tags
Settings
Edit
Name
pepasa-cloudfront
Description
Pepasa online
Price class
Use all edge locations (best performance)
Supported HTTP versions
Alternate domain names
pepasa.online
Route domains to CloudFront
Custom SSL certificate
pepasa.online
Security policy
TLSv1.2_2021
Standard logging
Available with the Pro plan
Default root object
index.html

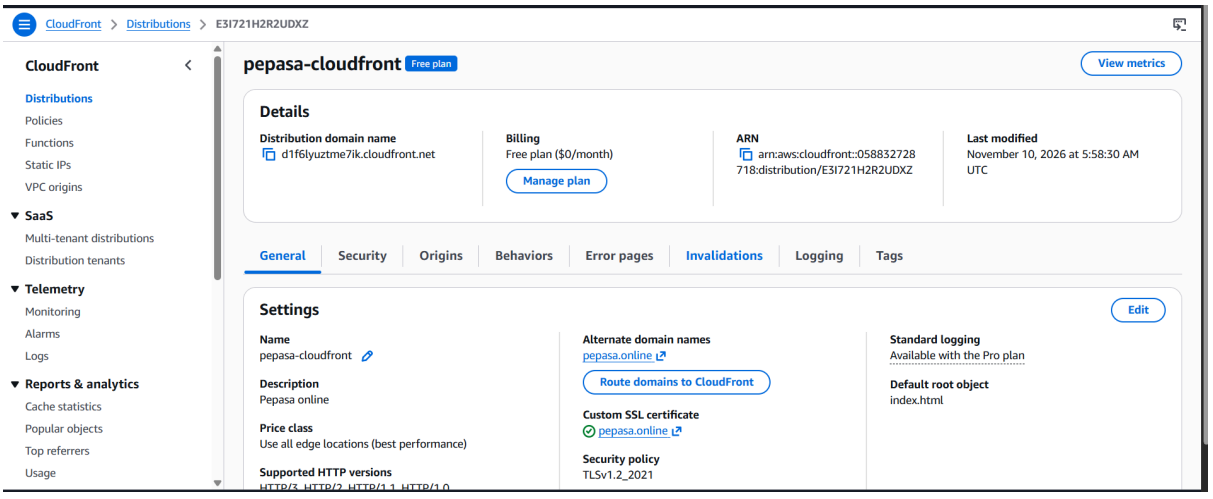
CloudFront > Distributions > E3I721H2R2UDXZ
CloudFront
Distributions
Policies
Functions
Static IPs
VPC origins
SaaS
Multi-tenant distributions
Distribution tenants
Telemetry
Monitoring
Alarms
Logs
Reports & analytics
Cache statistics
Popular objects
Top referrers
Usage
pepasa-cloudfront Free plan
View metrics
Details
Distribution domain name
d1f6lyuztme7ik.cloudfront.net
Billing
Free plan ($0/month)
Manage plan
ARN
arn:aws:cloudfront::058832728718:distribution/E3I721H2R2UDXZ
Last modified
November 10, 2026 at 5:58:30 AM UTC
General
Security
Origins
Behaviors
Error pages
Invalidations
Logging
Tags
Settings
Edit
Name
pepasa-cloudfront
Description
Pepasa online
Price class
Use all edge locations (best performance)
Supported HTTP versions
Alternate domain names
pepasa.online
Route domains to CloudFront
Custom SSL certificate
pepasa.online
Security policy
TLSv1.2_2021
Standard logging
Available with the Pro plan
Default root object
index.html

Step 1: Create a Hosted Zone

1. Log in to the AWS Management Console.
2. Search for Route 53.
3. Select Hosted zones.
4. Click Create hosted zone.
5. Enter the domain name: `pepasa.online`.
6. Select Public hosted zone.
7. Click Create hosted zone.

Step 2: Configure Name Servers

1. Open the newly created hosted zone.
2. Locate the NS record.
3. Copy all four AWS name servers.
4. Open your domain registrar.
5. Navigate to DNS or Nameserver settings.
6. Replace the existing nameservers with the four Route 53 nameservers.
7. Save the changes.

Step 3: Create an A Alias Record

1. Open the `pepasa.online` hosted zone.
2. Click Create record.
3. Leave the record name blank.
4. Select record type A.
5. Enable Alias.
6. Select Alias to CloudFront distribution.
7. Choose your CloudFront distribution (`pepasa-cloudfront`).
8. Select Simple routing.
9. Click Create records.


Step 4: Create an AAAA Alias Record


1. Click Create record.
2. Leave the record name blank.
3. Select record type AAAA.
4. Enable Alias.
5. Select the same CloudFront distribution.
6. Click Create records.

Step 5: Verify Domain Mapping

1. Open the CloudFront console.
2. Select your distribution.
3. Verify that `pepasa.online` is added under Alternate domain names.
4. Verify that the SSL certificate is attached.
5. Wait until the distribution status becomes Enabled.
6. Open `https://pepasa.online` in your browser.
7. Verify that the website loads successfully.

6. Update the index.html in the S3 bucket and ensure the updated file is accessible using the domain name.

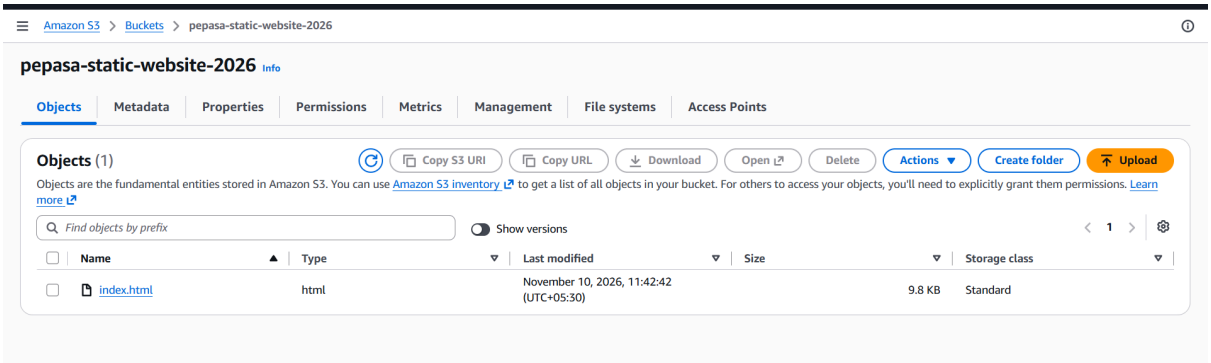

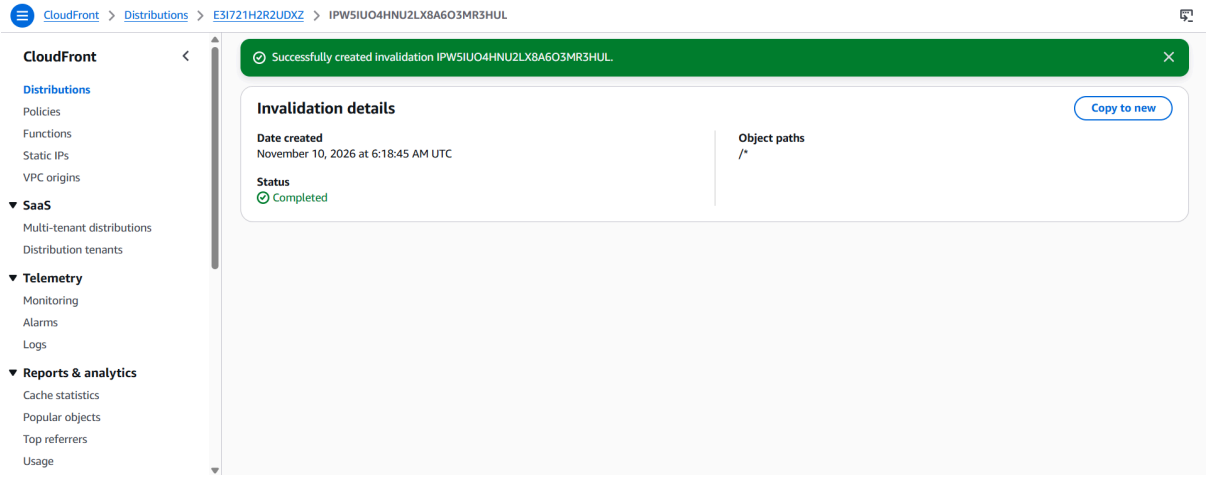


1. Open the AWS Management Console.
2. Search for S3.
3. Open the bucket
4. Click Upload.
5. Select the updated `index.html` file.


6. Click Upload to overwrite the existing file.
7. Open CloudFront.
8. Select your CloudFront distribution.
9. Go to Invalidations.
10. Click Create invalidation.
11. Enter the path:

```
None
/index.html
```

12. Click Create invalidation.
13. Wait until the invalidation status becomes Completed.
14. Open your browser.
15. Access.
16. Verify that the updated website is displayed.

7. Share the domain name in Slack to test the connectivity

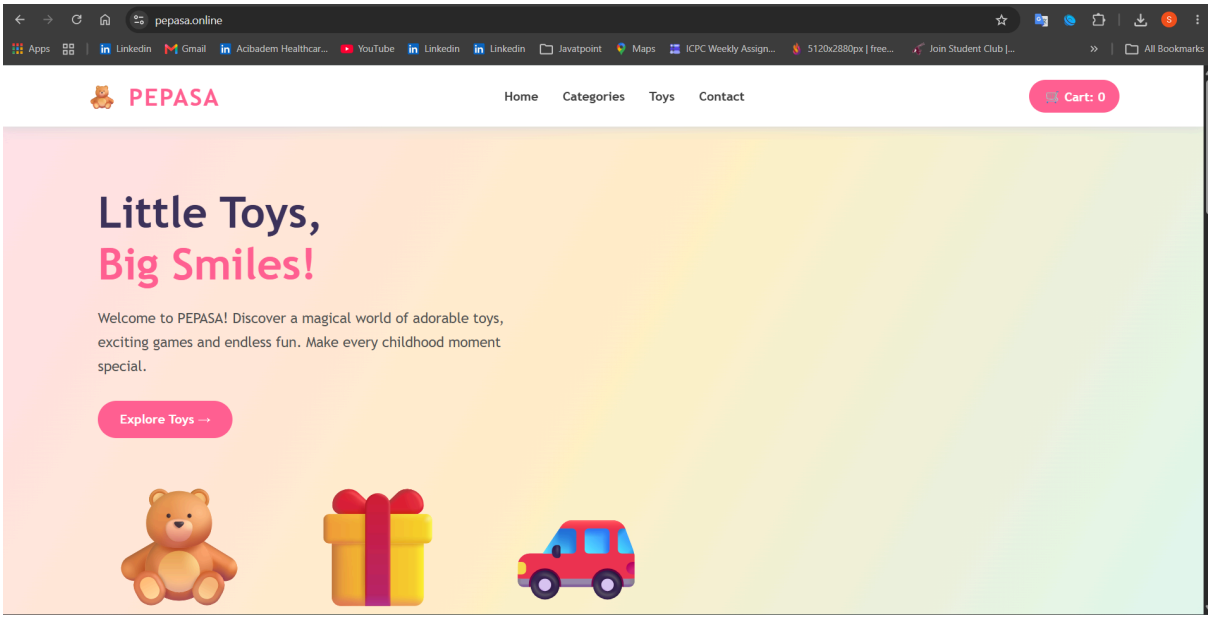

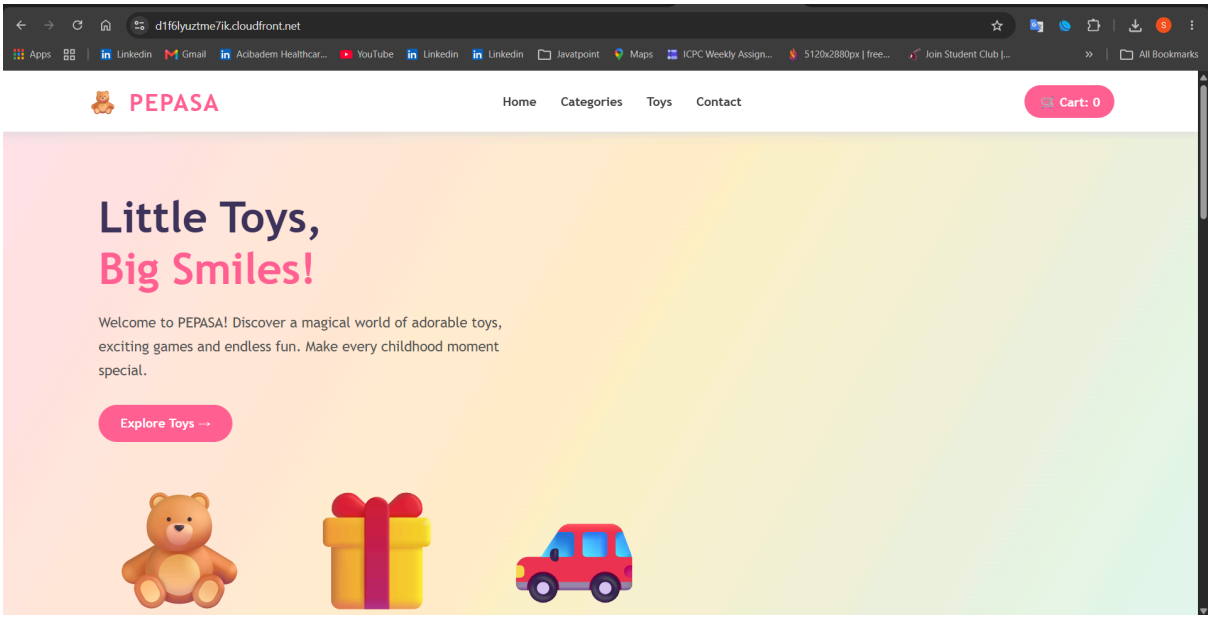

https://pepasa.online/