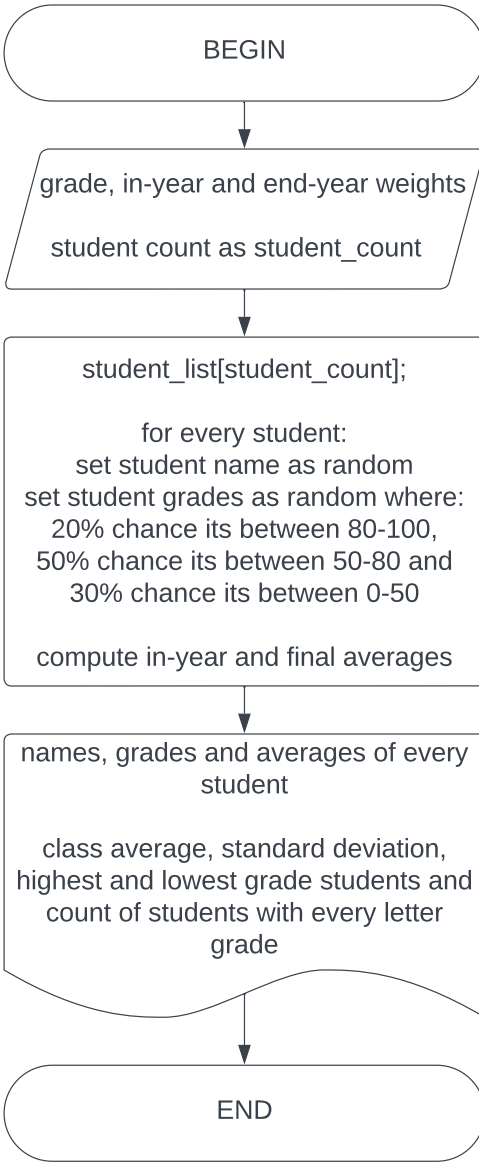
BEGIN
grade, in-year and end-year weights
student count as student_count
student_list[student_count];
for every student:
set student name as random
set student grades as random where:
20% chance its between 80-100,
50% chance its between 50-80 and
30% chance its between 0-50
compute in-year and final averages
names, grades and averages of every student
class average, standard deviation, highest and lowest grade students and count of students with every letter grade
END