

Reducing Variance

- Causality trick
- Discount factor
- Baseline
- Actor-critic
- Optimization techniques:
 - Natural gradient
 - Trust region

Reducing Variance: Causality

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \underbrace{\nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t})}_{\text{prob. traj}} \right) \underbrace{\left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)}_{\text{return}}$$


Causality: policy at time t' cannot affect reward at time t when $t < t'$

Original

$$\frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\sum_{t'=1}^T r(\mathbf{a}_{i,t'}, \mathbf{s}_{i,t'}) \right)$$

$$\frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\sum_{t'=t}^T r(\mathbf{a}_{i,t'}, \mathbf{s}_{i,t'}) \right)$$

$\stackrel{\text{"reward to go"} \hat{r}(\mathbf{a}_{i,t}, \mathbf{s}_{i,t'})}{=} \mathbb{E} \left(\nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \sum_{t'=1}^{t-1} \hat{r}(\mathbf{a}_{i,t'}, \mathbf{s}_{i,t'}) \right)$

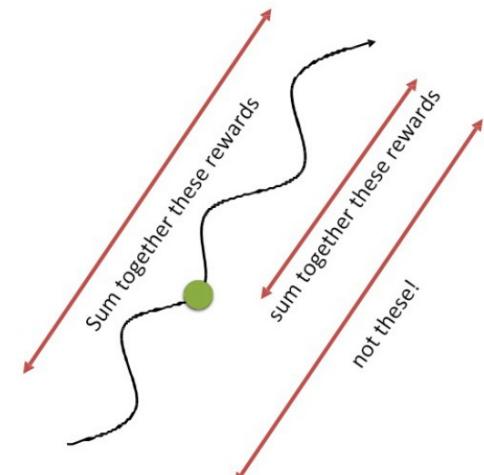

Reducing Variance: Discount Factor

option 1: $\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\sum_{t'=t}^T \gamma^{t'-t} r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right)$

option 2: $\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T \gamma^{t-1} r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$

Not the same

$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\sum_{t=1}^T \gamma^{t-1} r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$

$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \gamma^{t-1} \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\sum_{t'=t}^T \gamma^{t'-t} r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right)$

Reducing Variance: Baselines

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \nabla_{\theta} \log p_{\theta}(\tau) [r(\tau) - b]$$

$$b = \frac{1}{N} \sum_{i=1}^N r(\tau)$$

$$E[\nabla_{\theta} \log p_{\theta}(\tau) b] = \int p_{\theta}(\tau) \nabla_{\theta} \log p_{\theta}(\tau) b d\tau = \int \nabla_{\theta} p_{\theta}(\tau) b d\tau = b \nabla_{\theta} \underbrace{\int p_{\theta}(\tau) d\tau}_1 = b \nabla_{\theta} 1 = 0$$


const(τ)

subtracting a baseline is *unbiased* in expectation!

average reward is *not* the best baseline, but it's pretty good!


a convenient identity

$$p_{\theta}(\tau) \nabla_{\theta} \log p_{\theta}(\tau) = \nabla_{\theta} p_{\theta}(\tau)$$

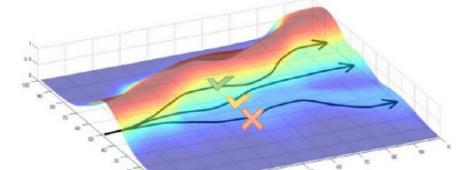

Reducing Variance: Baselines

Faster convergence:

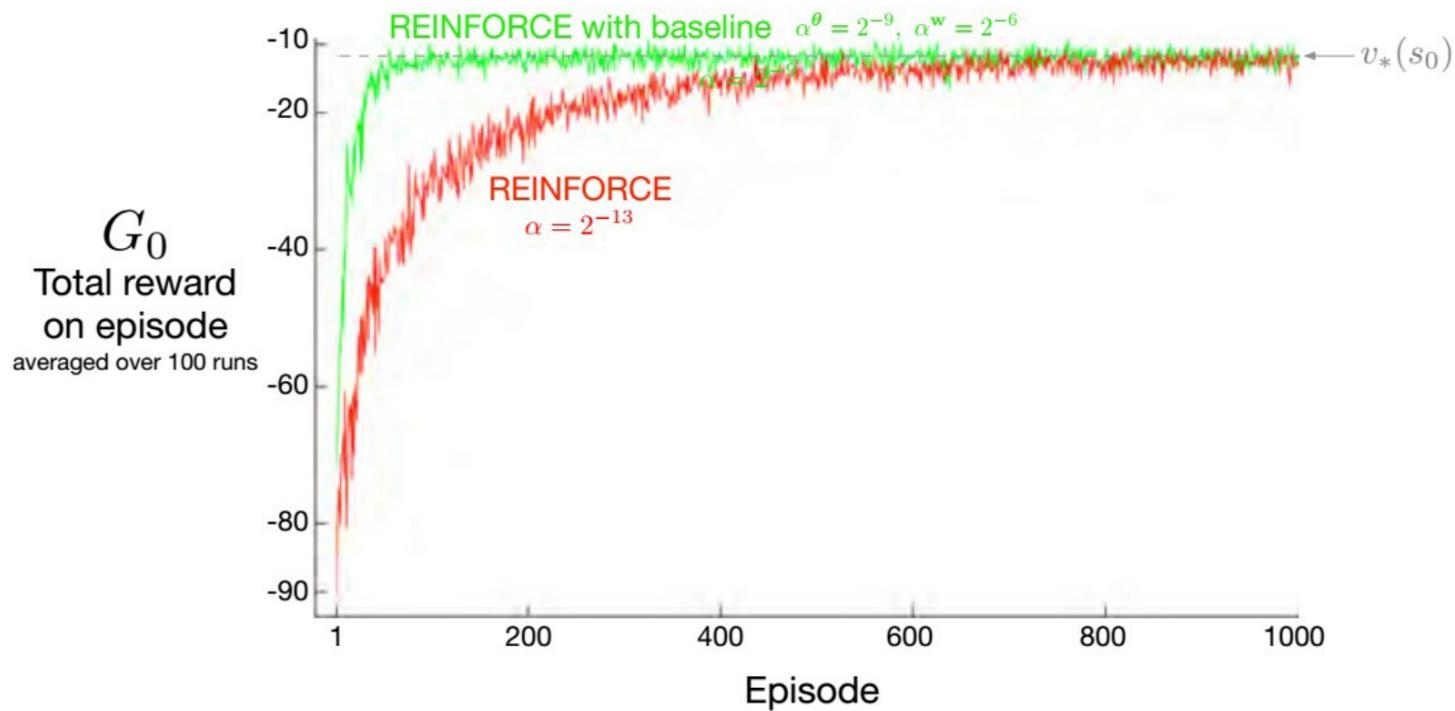

Analyzing Variance

$$\min \text{Var}[f(b, \dots, b)]$$

$$\min \text{Var}[f(b_1, \dots, b_n)]$$

$$\text{Var}[x] = E[x^2] - E[x]^2$$

$$\nabla_{\theta} J(\theta) = E_{\tau \sim p_{\theta}(\tau)} [\nabla_{\theta} \log p_{\theta}(\tau) (r(\tau) - b)]$$

$$\text{Var} = E_{\tau \sim p_{\theta}(\tau)} [(\underbrace{\nabla_{\theta} \log p_{\theta}(\tau) (r(\tau) - b)}_{g(\tau)})^2] - E_{\tau \sim p_{\theta}(\tau)} [\nabla_{\theta} \log p_{\theta}(\tau) (r(\tau) - b)]^2$$

const(b)



this bit is just $E_{\tau \sim p_{\theta}(\tau)} [\nabla_{\theta} \log p_{\theta}(\tau) r(\tau)]$
 (baselines are unbiased in expectation)

$$\begin{aligned} \frac{d\text{Var}}{db} &= \frac{d}{db} E[g(\tau)^2 (r(\tau) - b)^2] = \frac{d}{db} (E[\cancel{g(\tau)^2 r(\tau)^2}] - 2E[g(\tau)^2 r(\tau)b] + b^2 E[g(\tau)^2]) \\ &= -2E[g(\tau)^2 r(\tau)] + 2bE[g(\tau)^2] = 0 \end{aligned}$$

$$b = \frac{E[g(\tau)^2 r(\tau)]}{E[g(\tau)^2]}$$

This is just expected reward, but weighted by gradient magnitudes!

Reducing Variance: Review

- • Exploiting causality
 - Future doesn't affect the past
- • Discount factor
 - Two different version
- • Baselines
 - Analyzing variance for deriving optimal baselines
 - Now: Introducing actor-critic methods!


Policy Gradients so Far

REINFORCE algorithm:


1. sample $\{\tau^i\}$ from $\pi_\theta(\mathbf{a}_t | \mathbf{s}_t)$ (run the policy)
 2. $\nabla_\theta J(\theta) \approx \sum_i \left(\sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_t^i | \mathbf{s}_t^i) \left(\sum_{t'=t}^T r(\mathbf{s}_{t'}, \mathbf{a}_{t'}^i) \right) \right)$
 3. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$
- $Q^\pi(s, a)$
-

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \hat{Q}_{i,t}^\pi$$

“reward to go”

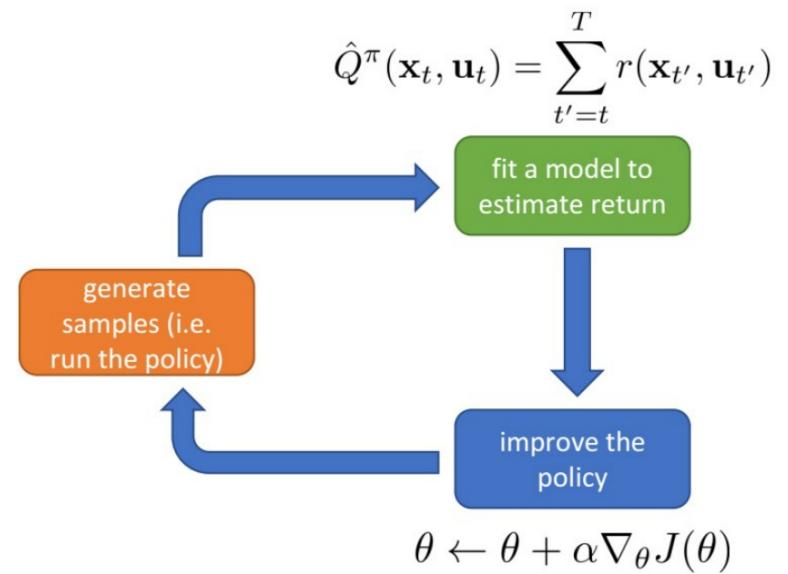


Improving Estimation of Reward to Go
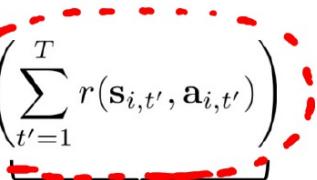
$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\sum_{t'=1}^T r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right)$$


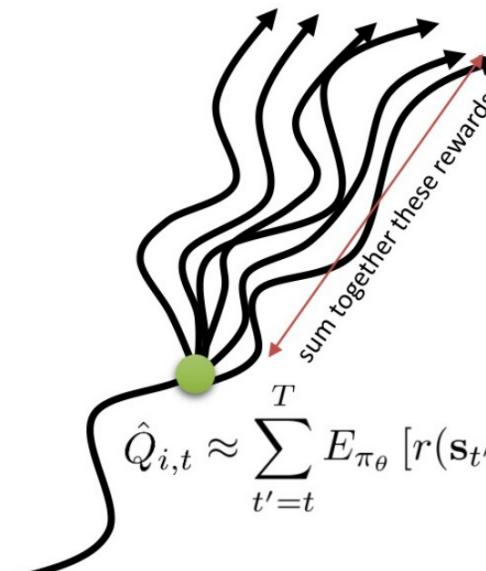
$\hat{Q}_{i,t}$: estimate of expected reward if we take action $\mathbf{a}_{i,t}$ in state $\mathbf{s}_{i,t}$

How to make a better estimate?
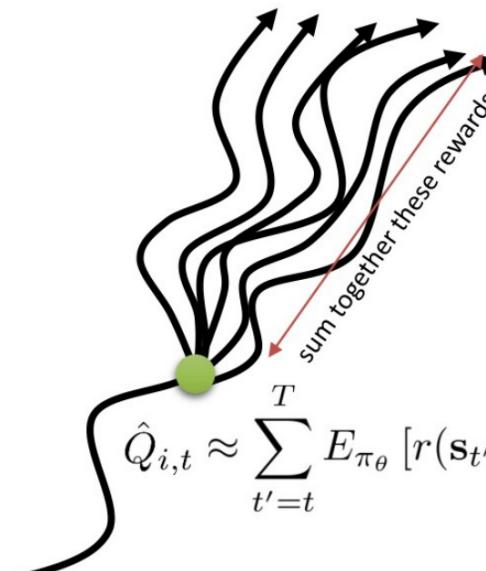
$$Q(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_{\theta}} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]: \text{true expected reward-to-go}$$


$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \underline{Q(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})}$$

much lower variance!

$$\hat{Q}_{i,t} \approx \sum_{t'=t}^T E_{\pi_{\theta}} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]$$


Improving Estimation of Reward to Go

Further improvement: Adding a baseline!

$Q(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]$: true expected reward-to-go

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) (Q(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) - b_t)$$

baseline

$$b_t = \frac{1}{N} \sum_i Q(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$


$a_{i,t} \sim \pi_\theta$

$\overbrace{\quad}^{\text{return}}$

\downarrow

$\overbrace{\quad}^{\text{value}}$

$V(s_{i,t})$

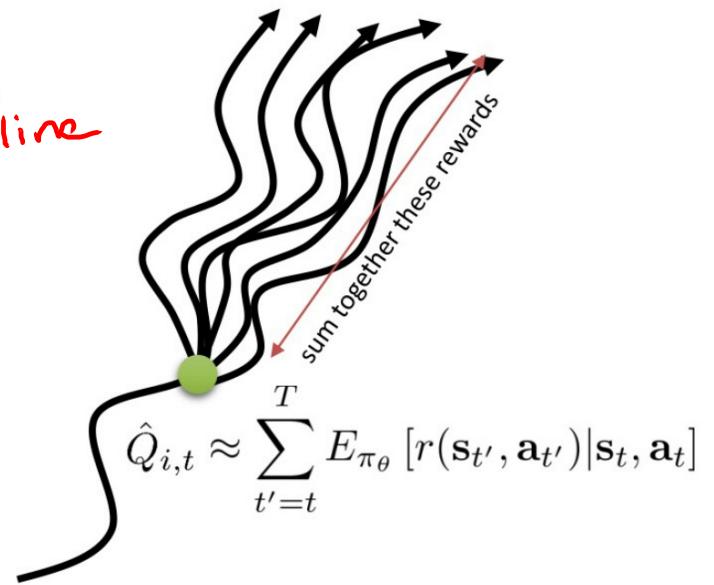

Improving Estimation of Reward to Go


Further improvement: Adding a baseline!

$$Q(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]: \text{true expected reward-to-go}$$

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) (Q(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) - V(\mathbf{s}_{i,t}))$$

$$b_t = \frac{1}{N} \sum_i Q(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$

$$V(\mathbf{s}_t) = E_{\mathbf{a}_t \sim \pi_\theta(\mathbf{a}_t | \mathbf{s}_t)} [Q(\mathbf{s}_t, \mathbf{a}_t)]$$

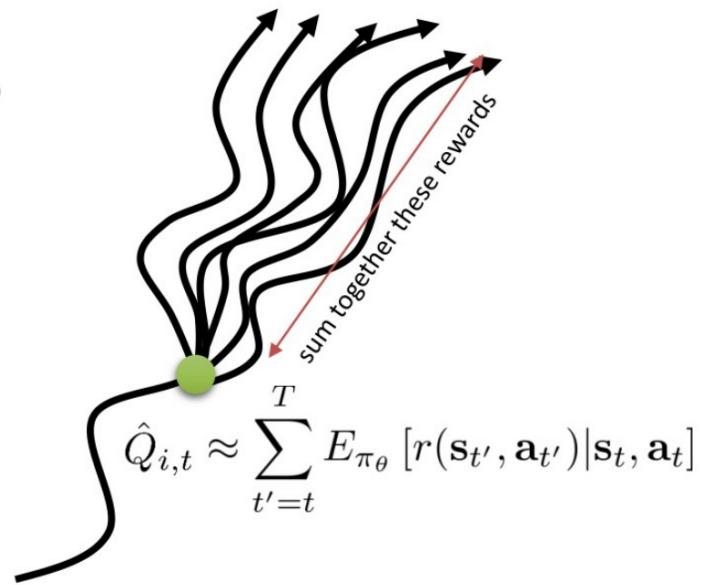

Advantage Value

$Q^\pi(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_\theta}[r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]$: total reward from taking \mathbf{a}_t in \mathbf{s}_t

$V^\pi(\mathbf{s}_t) = E_{\mathbf{a}_t \sim \pi_\theta(\mathbf{a}_t | \mathbf{s}_t)}[Q^\pi(\mathbf{s}_t, \mathbf{a}_t)]$: total reward from \mathbf{s}_t

$A^\pi(\mathbf{s}_t, \mathbf{a}_t) = \underbrace{Q^\pi(\mathbf{s}_t, \mathbf{a}_t)}_{\text{Reward}} - \underbrace{V^\pi(\mathbf{s}_t)}_{\text{baseline}}$: how much better \mathbf{a}_t is

to go

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) A^\pi(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$



the better this estimate, the lower the variance


Advantage Value Approximation

$$Q^\pi(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_\theta}[r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]$$

$$V^\pi(\mathbf{s}_t) = E_{\mathbf{a}_t \sim \pi_\theta(\mathbf{a}_t | \mathbf{s}_t)}[Q^\pi(\mathbf{s}_t, \mathbf{a}_t)]$$

$$A^\pi(\mathbf{s}_t, \mathbf{a}_t) = Q^\pi(\mathbf{s}_t, \mathbf{a}_t) - V^\pi(\mathbf{s}_t)$$

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) A^\pi(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$

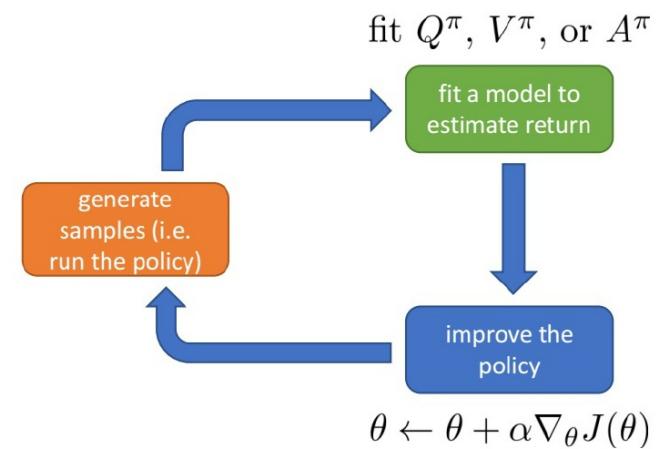



$$\begin{aligned}
 Q^\pi(\mathbf{s}_t, \mathbf{a}_t) &= \sum_{t'=t}^T E_{\pi_\theta}[r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t] \\
 &= r(\mathbf{s}_t, \mathbf{a}_t) + \sum_{t'=t+1}^T E_{\pi_\theta}[r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t] \\
 &\approx V^\pi(\mathbf{s}_{t+1})
 \end{aligned}$$

Advantage Value Approximation

$$Q^\pi(\mathbf{s}_t, \mathbf{a}_t) \approx r(\mathbf{s}_t, \mathbf{a}_t) + V^\pi(\mathbf{s}_{t+1})$$

$$A^\pi(\mathbf{s}_t, \mathbf{a}_t) \approx r(\mathbf{s}_t, \mathbf{a}_t) + V^\pi(\mathbf{s}_{t+1}) - V^\pi(\mathbf{s}_t)$$

let's just fit $V^\pi(\mathbf{s})$!

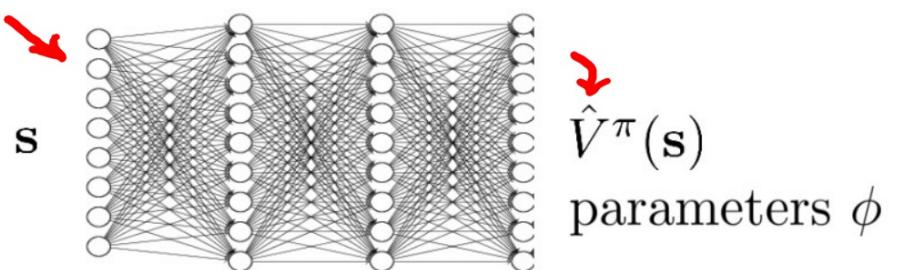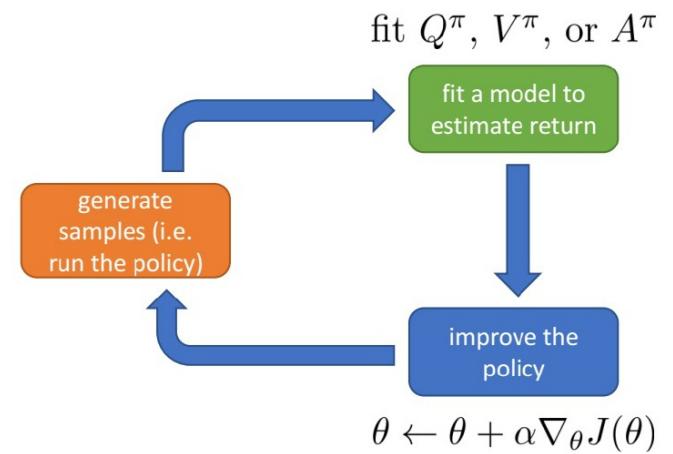

Policy Evaluation

$$V^\pi(\mathbf{s}_t) = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t]$$

$$J(\theta) = E_{\mathbf{s}_1 \sim p(\mathbf{s}_1)} [V^\pi(\mathbf{s}_1)]$$


how can we perform policy evaluation?

Monte Carlo policy evaluation (this is what policy gradient does)

$$V^\pi(\mathbf{s}_t) \approx \sum_{t'=t}^T r(\mathbf{s}_{t'}, \mathbf{a}_{t'})$$

$$V^\pi(\mathbf{s}_t) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t'=t}^T r(\mathbf{s}_{t'}, \mathbf{a}_{t'})$$

(requires us to reset the simulator)

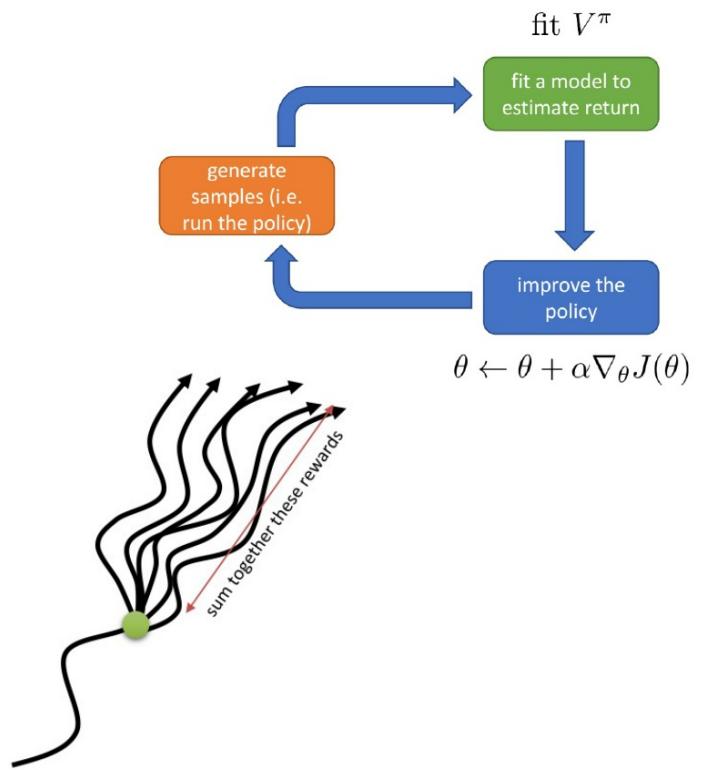



Policy Evaluation

Monte Carlo estimation with function approximator:

$$V^\pi(\mathbf{s}_t) \approx \sum_{t'=t}^T r(\mathbf{s}_{t'}, \mathbf{a}_{t'})$$

not as good as this: $V^\pi(\mathbf{s}_t) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t'=t}^T r(\mathbf{s}_{t'}, \mathbf{a}_{t'})$

but still pretty good!

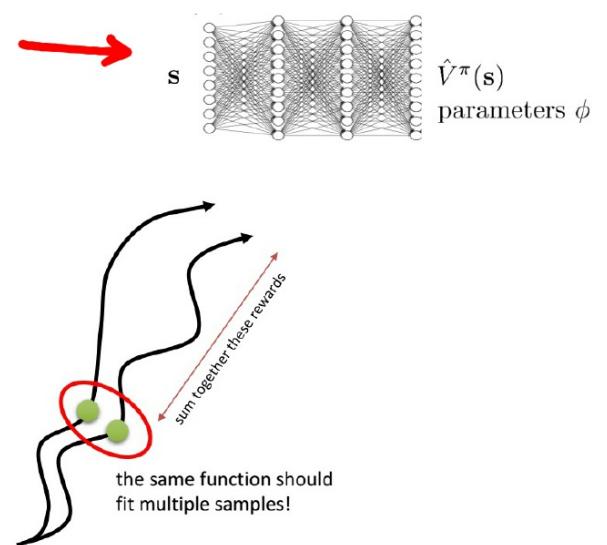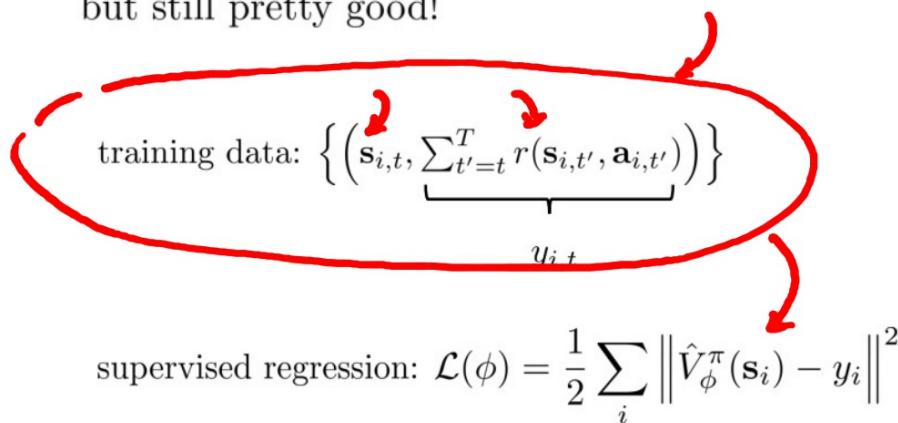

Policy Evaluation

How to make a better estimate?

$$\text{ideal target: } y_{i,t} = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_{i,t}] \approx r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + V^\pi(\mathbf{s}_{i,t+1}) \approx r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \underbrace{\hat{V}_\phi^\pi(\mathbf{s}_{i,t+1})}$$

$$\text{Monte Carlo target: } y_{i,t} = \sum_{t'=t}^T r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'})$$

directly use previous fitted value function!

Policy Evaluation


Bootstrap Estimation with Function Approximator

ideal target: $y_{i,t} = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_{i,t}] \approx r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \hat{V}_\phi^\pi(\mathbf{s}_{i,t+1})$

training data: $\left\{ \left(\mathbf{s}_{i,t}, \underbrace{r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \hat{V}_\phi^\pi(\mathbf{s}_{i,t+1})}_{y_{i,t}} \right) \right\}$

supervised regression: $\mathcal{L}(\phi) = \frac{1}{2} \sum_i \left\| \hat{V}_\phi^\pi(\mathbf{s}_i) - y_i \right\|^2$


Batch Actor-Critic Algorithm

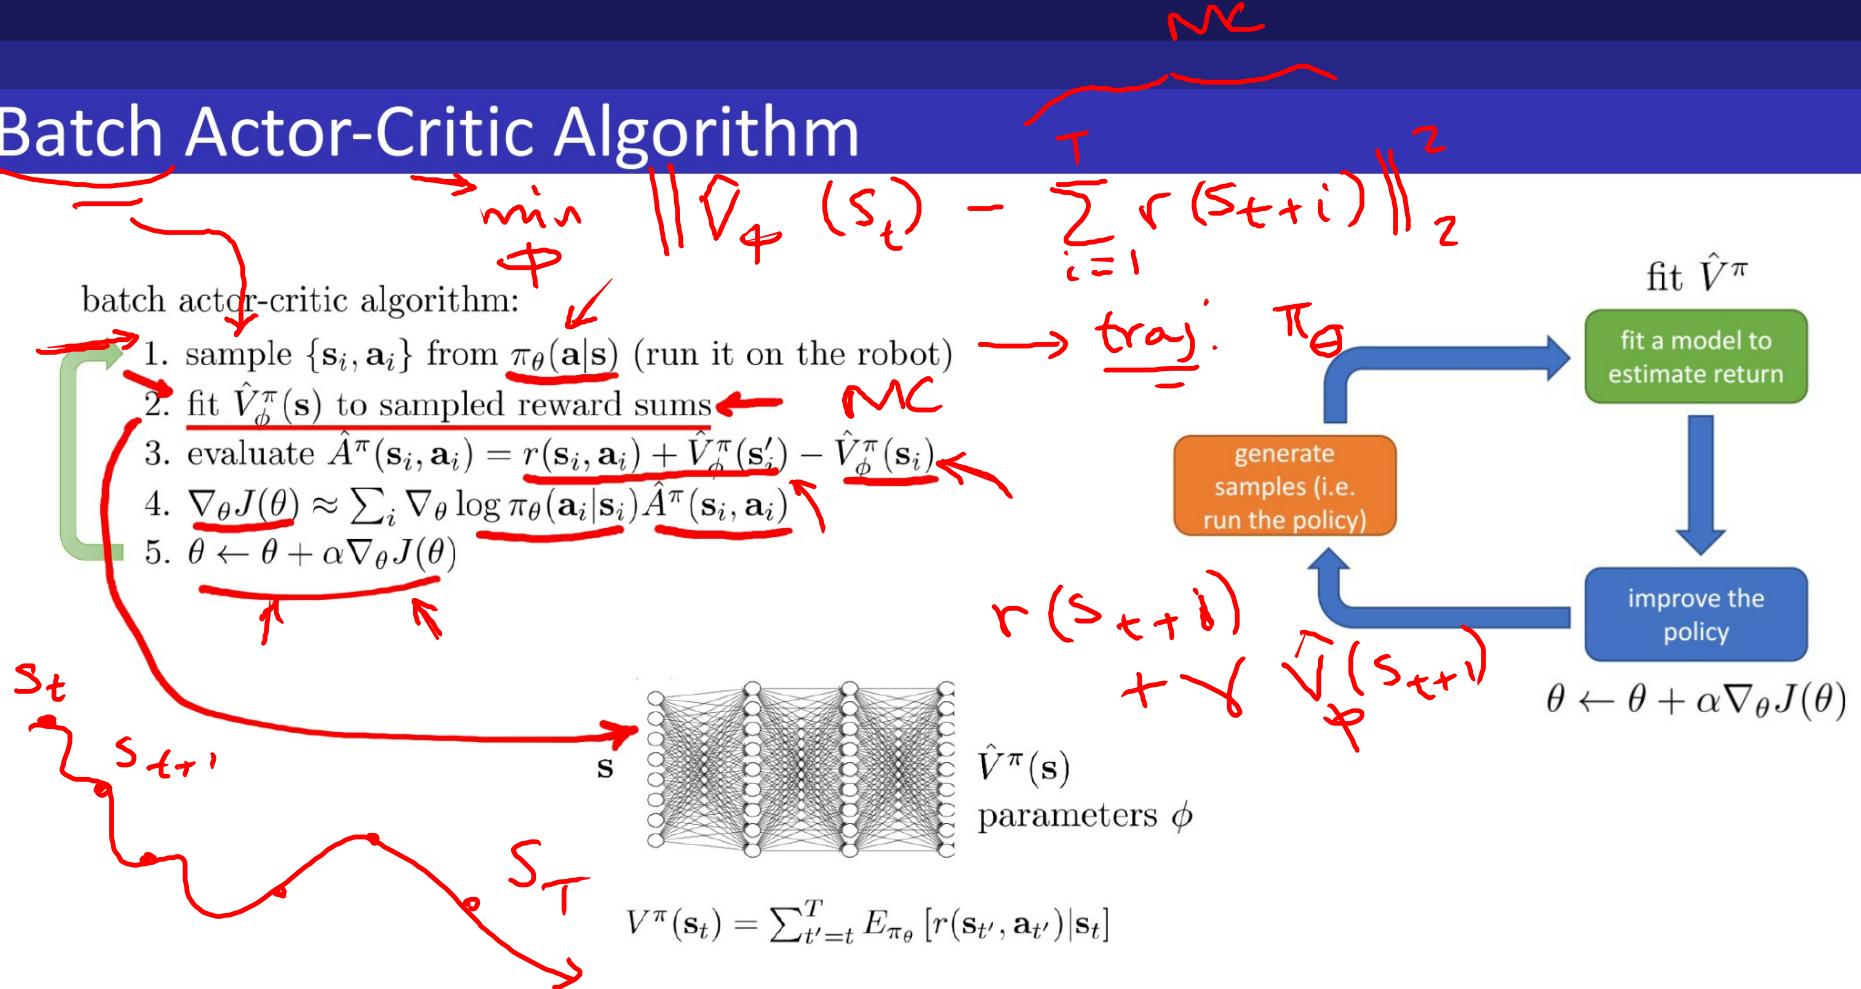


Actor-Critic Algorithm: Architecture Design

batch actor-critic algorithm:

1. sample $\{\mathbf{s}_i, \mathbf{a}_i\}$ from $\pi_\theta(\mathbf{a}|\mathbf{s})$ (run it on the robot)
2. fit $\hat{V}_\phi^\pi(\mathbf{s})$ to sampled reward sums
3. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = r(\mathbf{s}_i, \mathbf{a}_i) + \hat{V}_\phi^\pi(\mathbf{s}'_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
4. $\nabla_\theta J(\theta) \approx \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

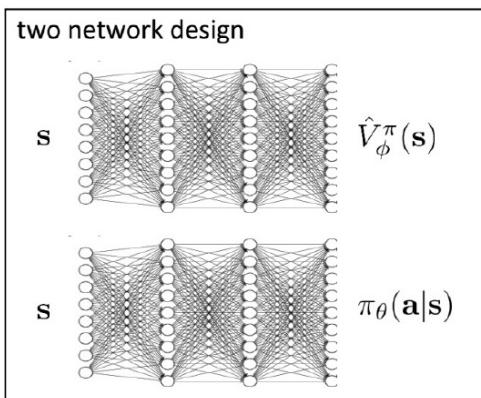

+ simple & stable
- no shared features between actor & critic

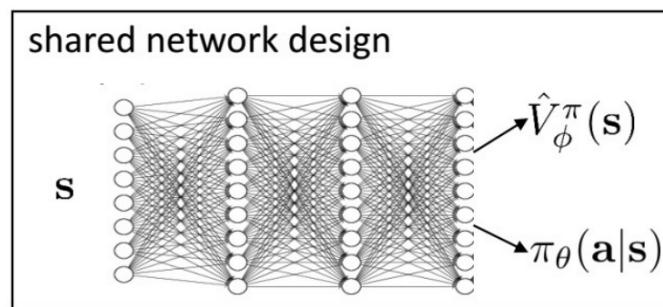

Policy Evaluation in Infinite Horizon Settings

$$y_{i,t} \approx r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \hat{V}_\phi^\pi(\mathbf{s}_{i,t+1})$$

$$\mathcal{L}(\phi) = \frac{1}{2} \sum_i \left\| \hat{V}_\phi^\pi(\mathbf{s}_i) - y_i \right\|^2$$

what if T (episode length) is ∞ ?

\hat{V}_ϕ^π can get infinitely large in many cases

simple trick: better to get rewards sooner than later

$$y_{i,t} \approx r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \gamma \hat{V}_\phi^\pi(\mathbf{s}_{i,t+1})$$


$$\mathcal{L}(\phi) = \frac{1}{2} \sum_i \left\| \hat{V}_\phi^\pi(\mathbf{s}_i) - y_i \right\|^2$$

$$\hat{A}^\pi(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\overbrace{r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \gamma \hat{V}_\phi^\pi(\mathbf{s}_{i,t+1}) - \hat{V}_\phi^\pi(\mathbf{s}_{i,t})}^{\text{TD error}} \right)$$

Actor-Critic Algorithm: Infinite Horizon

batch actor-critic algorithm:

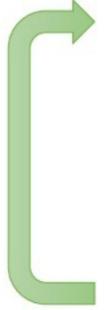- 
1. sample $\{\mathbf{s}_i, \mathbf{a}_i\}$ from $\pi_\theta(\mathbf{a}|\mathbf{s})$ (run it on the robot)
 2. fit $\hat{V}_\phi^\pi(\mathbf{s})$ to sampled reward sums
 3. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = r(\mathbf{s}_i, \mathbf{a}_i) + \gamma \hat{V}_\phi^\pi(\mathbf{s}'_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
 4. $\nabla_\theta J(\theta) \approx \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
 5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

Critics as Baselines

Actor-critic:

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}_{i,t+1}) - \hat{V}_{\phi}^{\pi}(\mathbf{s}_{i,t}) \right)$$

+ lower variance (due to critic)
- not unbiased (if the critic is not perfect)

Policy gradient:

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\left(\sum_{t'=t}^T \gamma^{t'-t} r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right) - b \right)$$

+ no bias
- higher variance (because single-sample estimate)

can we use \hat{V}_{ϕ}^{π} and still keep the estimator unbiased?

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \left(\left(\sum_{t'=t}^T \gamma^{t'-t} r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right) - \hat{V}_{\phi}^{\pi}(\mathbf{s}_{i,t}) \right)$$

+ no bias
+ lower variance (baseline is closer to rewards)

Eligibility Traces and N-step Returns



$$\hat{A}_C^\pi(s_t, a_t) = r(s_t, a_t) + \gamma \hat{V}_\phi^\pi(s_{t+1}) - \hat{V}_\phi^\pi(s_t)$$

- + lower variance
- higher bias if value is wrong (it always is)

$$\hat{A}_{MC}^\pi(s_t, a_t) = \sum_{t'=t}^{\infty} \gamma^{t'-t} r(s_{t'}, a_{t'}) - \hat{V}_\phi^\pi(s_t)$$


- + no bias
- higher variance (because single-sample estimate)

Can we combine these two, to control bias/variance tradeoff?

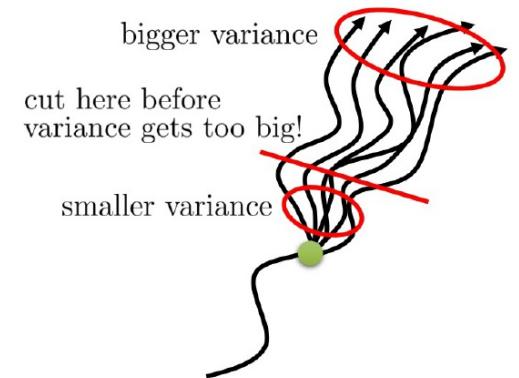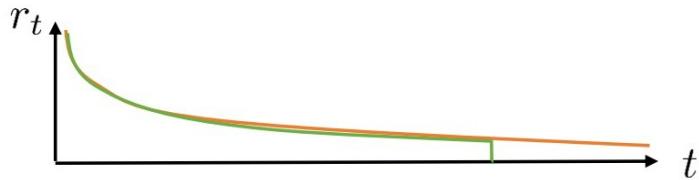

$$\hat{A}_n^\pi(s_t, a_t) = \sum_{t'=t}^{t+n} \gamma^{t'-t} r(s_{t'}, a_{t'}) - \hat{V}_\phi^\pi(s_t) + \gamma^n \hat{V}_\phi^\pi(s_{t+n})$$

Generalized Advantage Estimation

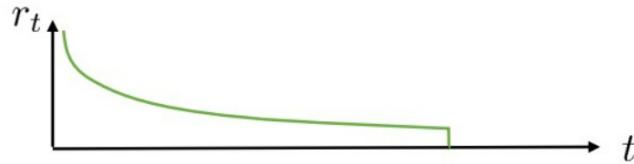

Do we have to choose just one n?

Cut everywhere all at once!

$$\hat{A}_n^\pi(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^{t+n} \gamma^{t'-t} r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) - \hat{V}_\phi^\pi(\mathbf{s}_t) + \gamma^n \hat{V}_\phi^\pi(\mathbf{s}_{t+n})$$

$$\hat{A}_{\text{GAE}}^\pi(\mathbf{s}_t, \mathbf{a}_t) = \sum_{n=1}^{\infty} w_n \hat{A}_n^\pi(\mathbf{s}_t, \mathbf{a}_t)$$

weighted combination of n-step returns

How to weight?

Mostly prefer cutting earlier (less variance)

$$w_n \propto \lambda^{n-1}$$

exponential falloff

$$\hat{A}_{\text{GAE}}^\pi(\mathbf{s}_t, \mathbf{a}_t) = r(\mathbf{s}_t, \mathbf{a}_t) + \gamma((1-\lambda)\hat{V}_\phi^\pi(\mathbf{s}_{t+1}) + \lambda(r(\mathbf{s}_{t+1}, \mathbf{a}_{t+1}) + \gamma((1-\lambda)\hat{V}_\phi^\pi(\mathbf{s}_{t+2}) + \lambda r(\mathbf{s}_{t+2}, \mathbf{a}_{t+2}) + \dots))$$

$$\hat{A}_{\text{GAE}}^\pi(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^{\infty} (\gamma \lambda)^{t'-t} \delta_{t'}$$

$$\delta_{t'} = r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) + \gamma \hat{V}_\phi^\pi(\mathbf{s}_{t'+1}) - \hat{V}_\phi^\pi(\mathbf{s}_{t'})$$

Actor-Critic Algorithm: Batch vs. Online

batch actor-critic algorithm:

1. sample $\{\mathbf{s}_i, \mathbf{a}_i\}$ from $\pi_\theta(\mathbf{a}|\mathbf{s})$ (run it on the robot)
2. fit $\hat{V}_\phi^\pi(\mathbf{s})$ to sampled reward sums
3. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = r(\mathbf{s}_i, \mathbf{a}_i) + \gamma \hat{V}_\phi^\pi(\mathbf{s}'_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
4. $\nabla_\theta J(\theta) \approx \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

online actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
2. update \hat{V}_ϕ^π using target $r + \gamma \hat{V}_\phi^\pi(\mathbf{s}')$
3. evaluate $\hat{A}^\pi(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_\phi^\pi(\mathbf{s}') - \hat{V}_\phi^\pi(\mathbf{s})$
4. $\nabla_\theta J(\theta) \approx \nabla_\theta \log \pi_\theta(\mathbf{a}|\mathbf{s}) \hat{A}^\pi(\mathbf{s}, \mathbf{a})$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$



just I training
sample

Online Actor-Critic in Practice: A2C and A3C

online actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
2. update \hat{V}_ϕ^π using target $r + \gamma \hat{V}_\phi^\pi(\mathbf{s}') \leftarrow$
3. evaluate $\hat{A}^\pi(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_\phi^\pi(\mathbf{s}') - \hat{V}_\phi^\pi(\mathbf{s})$
4. $\nabla_\theta J(\theta) \approx \nabla_\theta \log \pi_\theta(\mathbf{a}|\mathbf{s}) \hat{A}^\pi(\mathbf{s}, \mathbf{a}) \leftarrow$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

works best with a batch (e.g., parallel workers)

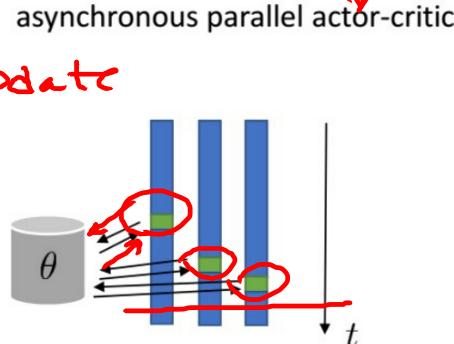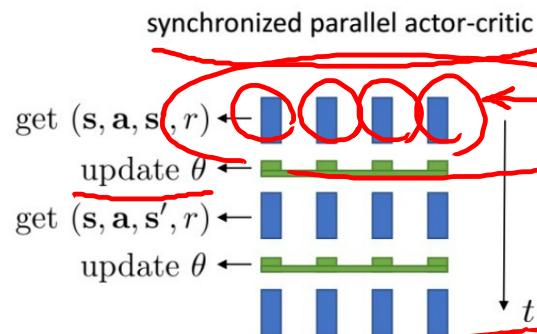


From On-Policy to Off-Policy Actor-Critic

online actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
2. update \hat{V}_ϕ^π using target $r + \gamma \hat{V}_\phi^\pi(\mathbf{s}')$
3. evaluate $\hat{A}^\pi(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_\phi^\pi(\mathbf{s}') - \hat{V}_\phi^\pi(\mathbf{s})$
4. $\nabla_\theta J(\theta) \approx \nabla_\theta \log \pi_\theta(\mathbf{a}|\mathbf{s}) \hat{A}^\pi(\mathbf{s}, \mathbf{a})$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$


Can we remove the on-policy assumption?

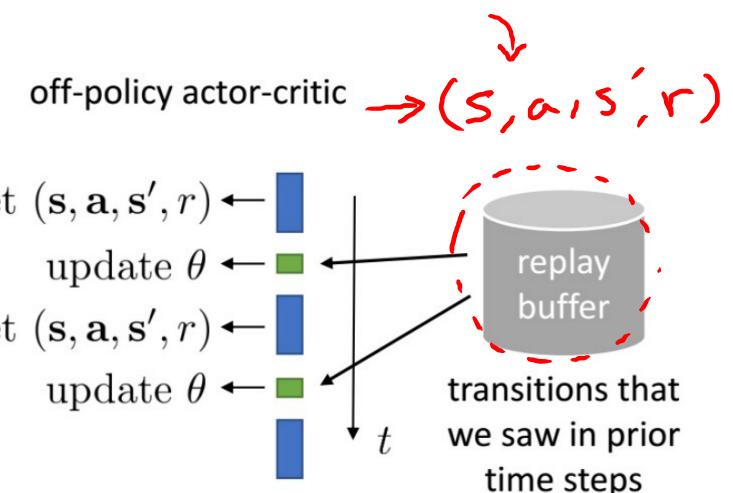

From On-Policy to Off-Policy Actor-Critic

off-policy actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$, store in \mathcal{R}
2. sample a batch $\{\mathbf{s}_i, \mathbf{a}_i, r_i, \mathbf{s}'_i\}$ from buffer \mathcal{R}
3. update \hat{V}_ϕ^π using targets $y_i = r_i + \gamma \hat{V}_\phi^\pi(\mathbf{s}'_i)$ for each \mathbf{s}_i
4. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = r(\mathbf{s}_i, \mathbf{a}_i) + \gamma V_\phi^\pi(\mathbf{s}'_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
5. $\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
6. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

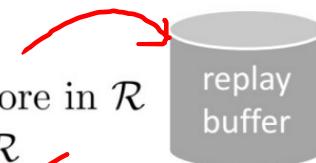

$$\mathcal{L}(\phi) = \frac{1}{N} \sum_i \left\| \hat{V}_\phi^\pi(\mathbf{s}_i) - y_i \right\|^2$$

not the right target value

not the action π_θ would have taken!

This algorithm is broken!

Can you spot the problems?

Off-Policy Actor-Critic: Fixing the Value Function

off-policy actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$, store in \mathcal{R}
2. sample a batch $\{\mathbf{s}_i, \mathbf{a}_i, r_i, \mathbf{s}'_i\}$ from buffer \mathcal{R}
3. update \hat{V}_ϕ^π using targets $y_i = r_i + \gamma \hat{V}_\phi^\pi(\mathbf{s}'_i)$ for each \mathbf{s}_i
4. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = r(\mathbf{s}_i, \mathbf{a}_i) + \gamma \hat{V}_\phi^\pi(\mathbf{s}'_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
5. $\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
6. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

3. update \hat{Q}_ϕ^π using targets $y_i = r_i + \gamma \hat{V}_\phi^\pi(\mathbf{s}'_i)$ for each $\mathbf{s}_i, \mathbf{a}_i$

$$= r_i + \gamma \hat{Q}_\phi^\pi(\mathbf{s}'_i, \mathbf{a}'_i)$$

$\mathbf{a}'_i \sim \pi_\theta(\mathbf{a}'_i|\mathbf{s}'_i)$

$$V^\pi(\mathbf{s}_t) = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'})|\mathbf{s}_t] = E_{\mathbf{a} \sim \pi(\mathbf{a}_t|\mathbf{s}_t)} [Q(\mathbf{s}_t, \mathbf{a}_t)]$$

$$\begin{aligned} V^\pi(\mathbf{s}_t) &= \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'})|\mathbf{s}_t] \\ Q^\pi(\mathbf{s}_t, \mathbf{a}_t) &= \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'})|\mathbf{s}_t, \mathbf{a}_t] \end{aligned}$$

not the right target value



$$\mathcal{L}(\phi) = \frac{1}{N} \sum_i \left\| \hat{Q}_\phi^\pi(\mathbf{s}_i, \mathbf{a}_i) - y_i \right\|^2$$

not from replay buffer \mathcal{R} !

Off-Policy Actor-Critic: Fixing the Policy Update

off-policy actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$, store in \mathcal{R}
2. sample a batch $\{\mathbf{s}_i, \mathbf{a}_i, r_i, \mathbf{s}'_i\}$ from buffer \mathcal{R}
3. update \hat{Q}_ϕ^π using targets $y_i = r_i + \gamma \hat{Q}_\phi^\pi(\mathbf{s}'_i, \mathbf{a}'_i)$ for each $\mathbf{s}_i, \mathbf{a}_i$
4. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = Q(\mathbf{s}_i, \mathbf{a}_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
5. $\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
6. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

$$\int \mathcal{P}(s) \mathcal{P}(a) \Delta \theta$$

not the action π_θ would have taken!

use the same trick, but this time for \mathbf{a}_i rather than \mathbf{a}'_i !

sample $\mathbf{a}_i^\pi \sim \pi_\theta(\mathbf{a}|\mathbf{s}_i)$ $\longrightarrow \nabla_\theta J(\theta) \approx \frac{1}{N} \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i^\pi|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i^\pi)$

in practice: $\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i^\pi|\mathbf{s}_i) \hat{Q}^\pi(\mathbf{s}_i, \mathbf{a}_i^\pi)$

higher variance, but convenient
why is higher variance OK here?

Off-Policy Actor-Critic

off-policy actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_\theta(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$, store in \mathcal{R}
2. sample a batch $\{\mathbf{s}_i, \mathbf{a}_i, r_i, \mathbf{s}'_i\}$ from buffer \mathcal{R}
3. update \hat{Q}_ϕ^π using targets $y_i = r_i + \gamma \hat{Q}_\phi^\pi(\mathbf{s}'_i, \mathbf{a}'_i)$ for each $\mathbf{s}_i, \mathbf{a}_i$
4. $\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i^\pi | \mathbf{s}_i) Q^\pi(\mathbf{s}_i, \mathbf{a}_i^\pi)$ where $\mathbf{a}_i^\pi \sim \pi_\theta(\mathbf{a} | \mathbf{s}_i)$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

Is there any remaining problem?

\mathbf{s}_i didn't come from $p_\theta(\mathbf{s})$

nothing we can do here, just accept it

intuition: we want optimal policy on $p_\theta(\mathbf{s})$
but we get optimal policy on a *broader* distribution