Yocto

metadata

- conf
- bb
- bbclass
- bbappend

meta → layer

① bitbake-layers create-layer directory/meta-alias

→ create directory (layer.conf)

② bitbake-layer add-layer → /meta

→ bblayers.conf

bitbake parse this file

Global Variable

① layer Name
② layer depend
③ layer compatibility
④ BBFILES

{{LAYERDIR}}/recipe-*/*/.bb

local.conf

— MACHINE → Rasp.conf

meta → conf → machine → raspberrypi3-64.conf

meta-alias/recipe-qt/weathear/weathear_1-0.bb

SUMMARY =

DESCRIPTION =

SRC_URI = git://_____.git; branch= ; protocol=

SRCREV = Commit Hash

LICENCE = "Closed"

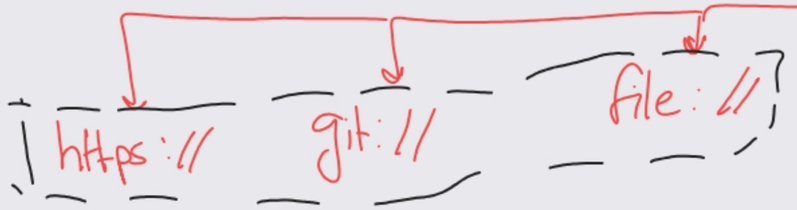

Workflow

1. fetch source
2. unpack
3. patch
4. configure
5. compile
6. packaging

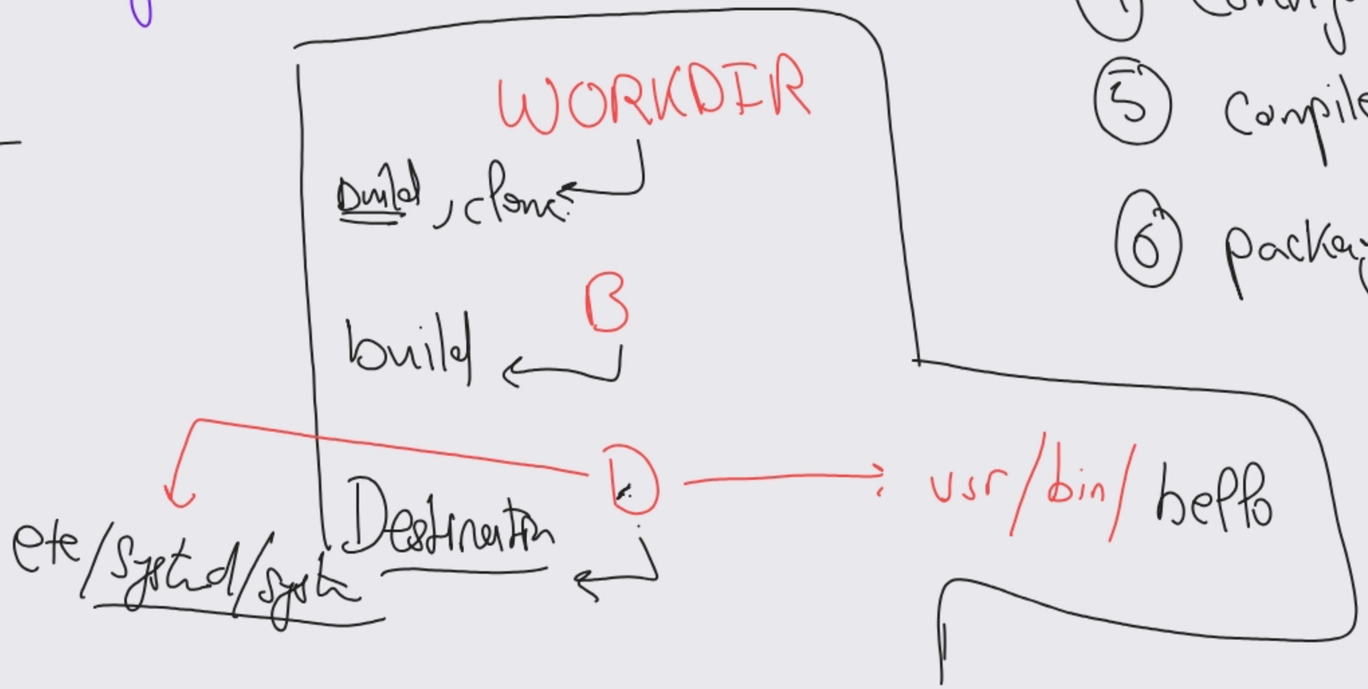

```
do_compile() {
    ${CC} ${WORKDIR}/git/main.cpp -o ${B}/hello
}

do_install() {
    mkdir ${D}/etc/systemd/system -p
    mkdir ${D}/usr/bin -p
    mv ${B}/hello ${D}/usr/bin/
    cp ${WORKDIR}/git/_____.service ${D}/etc/sys-
}
```

${D} = /

local SCM upstream

Variable

1. workdir
2. filespath → Default path [follow specific pattern]
   file locaty
3. Error
   → am patching the file on ${S}
   → 0.1/weather/
   → ${S}/git ← fix error
4. B → o/p build
5. D = /
   → Destination package
   → workdir/image

do_fetch
do_unpack
do_patch
→ SRC_URI

do_configure X

do_compile → ${CC}
bitbake → local.conf → MACHINE

do_installl → mkdir ${D}/usr/bin -p X

do_package_QA
→ check License
→ file o/p destination

do_package
→ package only the stuff under ${D}
weathe .rpm

package_feeder
→ Select packages that will be installed in image

do_installl

Don't use mkdir, cp, mv ✗

installl → create Directory
→ mv file
→ add permission file

.Conf

```
installl -d ${D} ${bindir}
installl -m 0664 ${B}/hello
installl -d ${D}${sysconfdir}
```

Appl package form

tmp/deploy/rpm/

do_compile {

→ ${CC} $~~{S}~~/main.cpp

→ main.cpp

}

do_compile [dirs] = "${S}"

do_configure [noexec] = "1"

do_compile [number] = "2"

LIC_FILES_CHKSUM

[MIT.lic; md5=]

LICENSE

MIT

md5sum

hash

Yocto
→ docker

workenv

cmake → x86
qmake → x86

→ Doesn't use tools Host Machine

Yocto

cmake
→ 2.5

→ 3.2

Repo
↓
cmake 3.2

↑ patch downgrade

Recipe
↳ clone Repo (Cmake)

Yocto
↳ PATH

inherit Cmake ← bitbake script
↳ set use cmake yocto
Cmake.bbclass

do_Configure ()
cmake -S
↑
Command
Not found