



IBM Developer
SKILLS NETWORK

Winning Space Race with Data Science

Ayman Ejaz
4 Sep 2023



Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix

Executive Summary

- Summary of methodologies
- Summary of all results

Introduction

- Project background and context
- Problems you want to find answers

Section 1

Methodology

Methodology

Executive Summary

- Data collection methodology:
 - SpaceX Rest API
 - (Web Scrapping) from Wikipedia
- Perform data wrangling
 - Collected data was enriched by creating a landing outcome label based on outcome data after summarizing and analyzing features
- Perform exploratory data analysis (EDA) using visualization and SQL
- Perform interactive visual analytics using Folium and Plotly Dash
- Perform predictive analysis using classification models

Methodology

Executive Summary

- Perform predictive analysis using classification models
 - Data that was collected until this step were normalized, divided in training and test data sets and evaluated by four different classification models, being the accuracy of each model evaluated using different combinations of parameters.

Data Collection

- Data from Space X was obtained from 2 sources:
 - Space X API (<https://api.spacexdata.com/v4/rockets/>)
 - WebScraping
(https://en.wikipedia.org/wiki/List_of_Falcon/9_and_Falcon_Heavy_launches)
- You need to present your data collection process use key phrases and flowcharts


Data Collection – SpaceX API

- SpaceX offers a public API from where data can be obtained and then used.
- This API was used according to the flowchart beside and then data is persisted.
- GitHub URL of the completed SpaceX API calls notebook:
<https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/01-spacex-data-collection-api.ipynb>




Data Collection - Scraping

- Data from SpaceX launches can also be obtained from Wikipedia.
- Data are downloaded from Wikipedia according to the flowchart and then persisted
- GitHub URL:
Web scraping notebook
<https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/02-spacex-web scraping.ipynb>

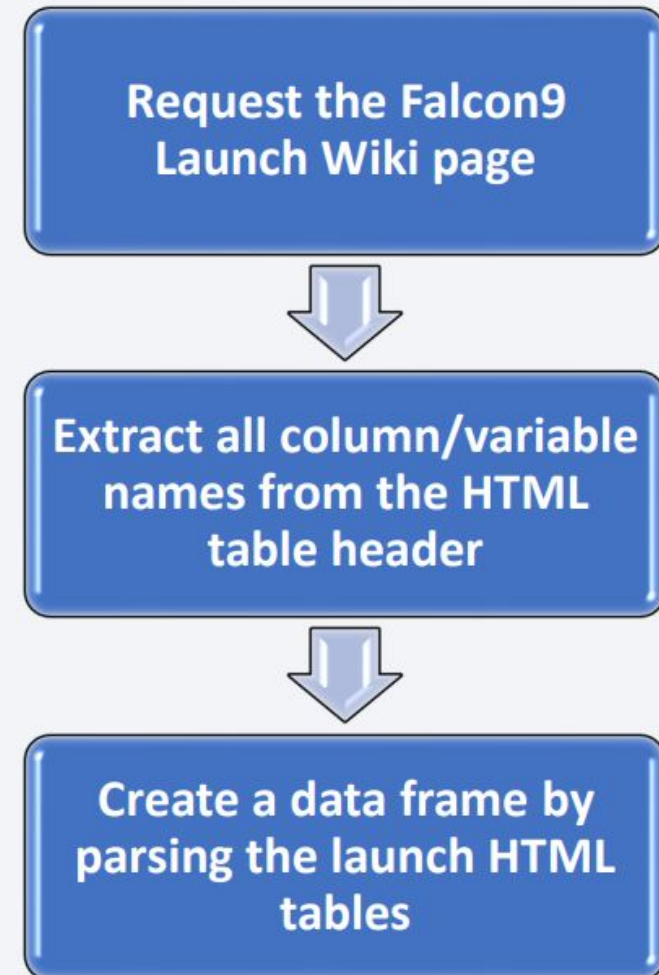

Data Wrangling


- Initially some Exploratory Data Analysis (EDA) was performed on the dataset.
- Then the summaries launches per site, occurrences of each orbit and occurrences of mission outcome per orbit type were calculated.
- Finally, the landing outcome label was created from Outcome column

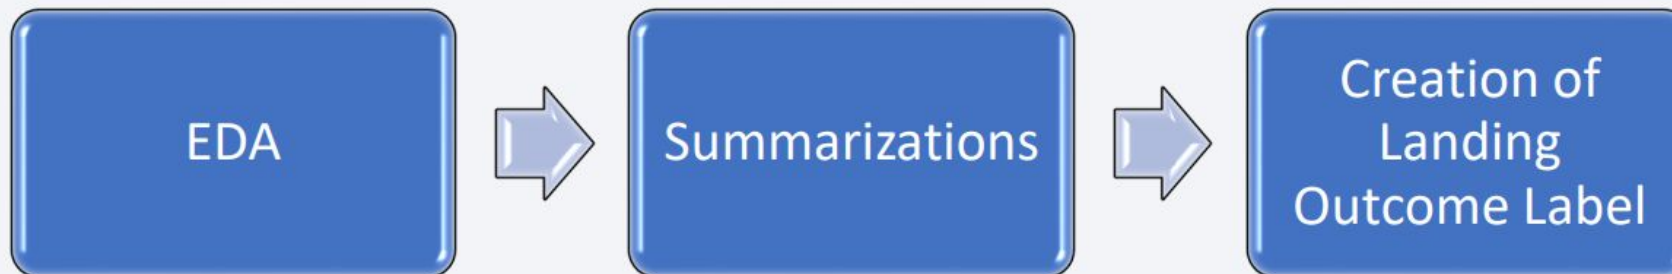

- GitHub URL:
completed data wrangling notebooks,
https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/03-spacex-data_wrangling.ipynb

EDA with Data Visualization

- To explore data, scatterplots and barplots were used to visualize the relationship between pair of features:
Payload Mass X Flight Number, Launch Site X Flight Number, Launch Site X Payload Mass, Orbit and Flight Number, Payload and Orbit

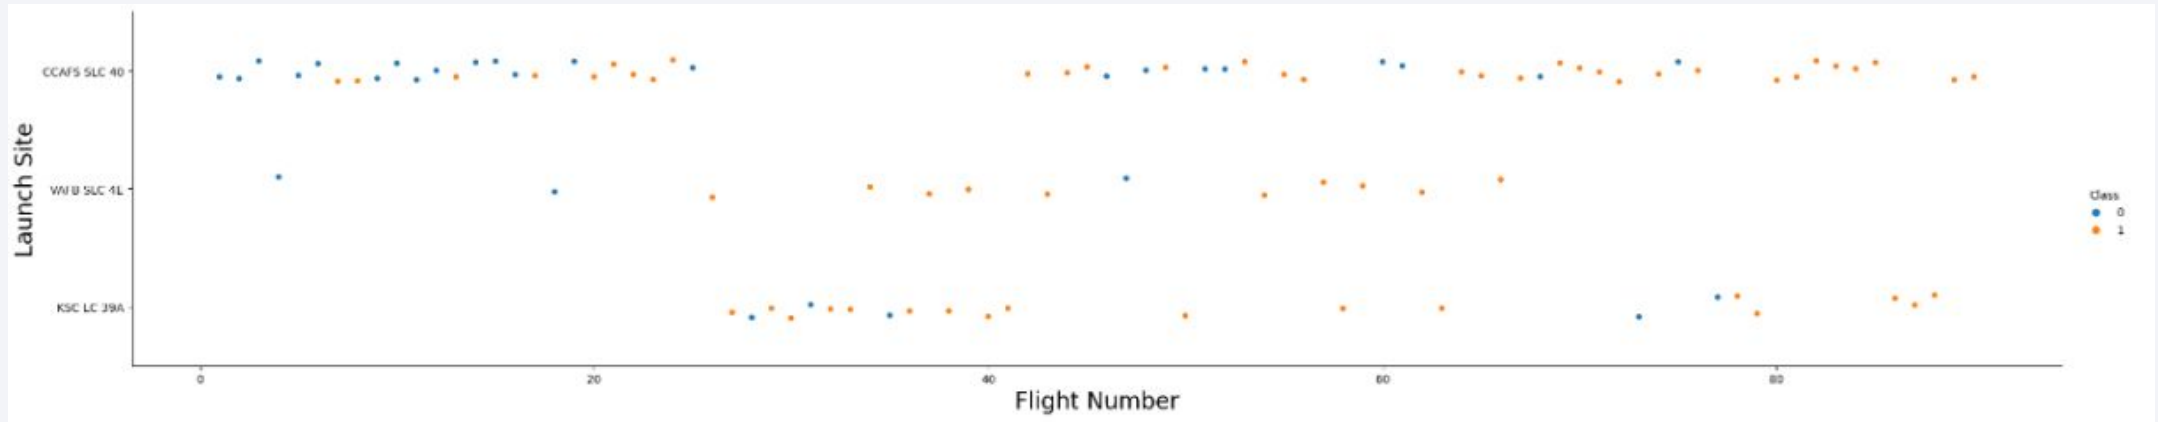

- GitHub URL:
completed EDA with data visualization
[notebookhttps://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/05-spacex-data-eda.ipynb](https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/05-spacex-data-eda.ipynb)

EDA with SQL

The following SQL queries were performed:

- Names of the unique launch sites in the space mission.
- Top 5 launch sites whose name begin with the string 'CCA'
- Total payload mass carried by boosters launched by NASA (CRS)
- Average payload mass carried by booster version F9 v1.1.
- Date when the first successful landing outcome in ground pad was achieved.
- Names of the boosters which have success in drone ship and have payload mass between 4000 and 6000 kg.
- Total number of successful and failure mission outcomes.
- Names of the booster versions which have carried the maximum payload mass.
- Failed landing outcomes in drone ship, their booster versions, and launch site names for in year 2015.
- Rank of the count of landing outcomes (such as Failure (drone ship) or Success (ground pad)) between the date 2010-06-04 and 2017-03-20

GitHub link:

<https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/04-spacex-data-EDA-sql.ipynb>

Build an Interactive Map with Folium

Some key points:

- Markers, circles, lines and marker clusters were used with Folium Maps
- Markers indicate points like launch sites.
- Circles indicate highlighted areas around specific coordinates, like NASA Johnson Space Center.
- Marker clusters indicates groups of events in each coordinate, like launches in a launch site.
- Lines are used to indicate distances between two coordinates.

Github Link:

https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/06-spacex_launch_site_location_with_Folium_lab.ipynb

Build a Dashboard with Plotly Dash

- The following graphs and plots were used to visualize data
 - Percentage of launches by site
 - Payload range
- This combination allowed to quickly analyze the relation between payloads and launch sites, helping to identify where is best place to launch according to payloads.

Source code:


https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/08_spacex_dash_app.py

Predictive Analysis (Classification)

Four classification models were compared: logistic regression, support vector machine, decision tree and k nearest neighbors.

Github link:

https://github.com/aymanejaz/Applied-Data-Science-Capstone/blob/main/09-Spacex_Machine_Learning_Prediction.ipynb


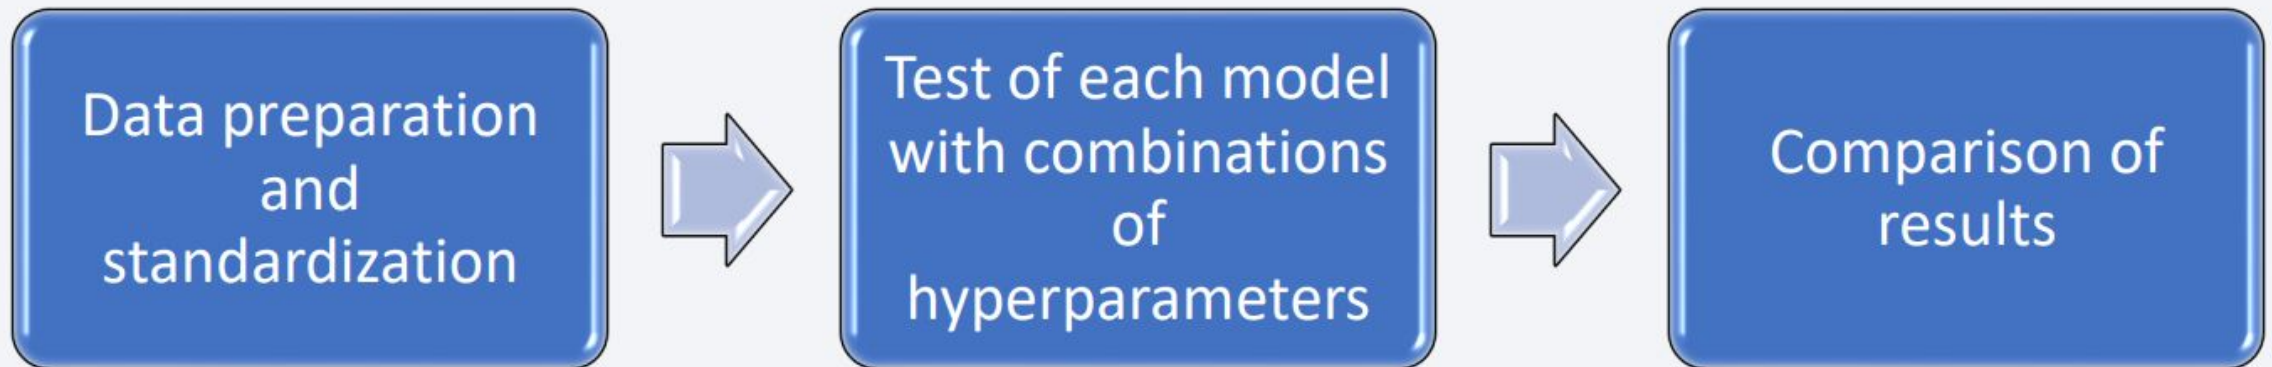


Results

- Exploratory data analysis results:
 - Space X uses 4 different launch sites.
 - The first launches were done to Space X itself and NASA
 - The average payload of F9 v1.1 booster is 2,928 kg
 - The first success landing outcome happened in 2015 five year after the first launch
 - Many Falcon 9 booster versions were successful at landing in drone ships having payload above the average
 - Almost 100% of mission outcomes were successful
 - Two booster versions failed at landing in drone ships in 2015: F9 v1.1 B1012 and F9 v1.1 B1015
 - The number of landing outcomes became as better as years passed.

Results

- Exploratory data analysis results:
 - Using interactive analytics was possible to identify that launch sites use to be in safety places, near sea, for example and have a good logistic infrastructure around.
- Most launches happens at east cost launch sites.

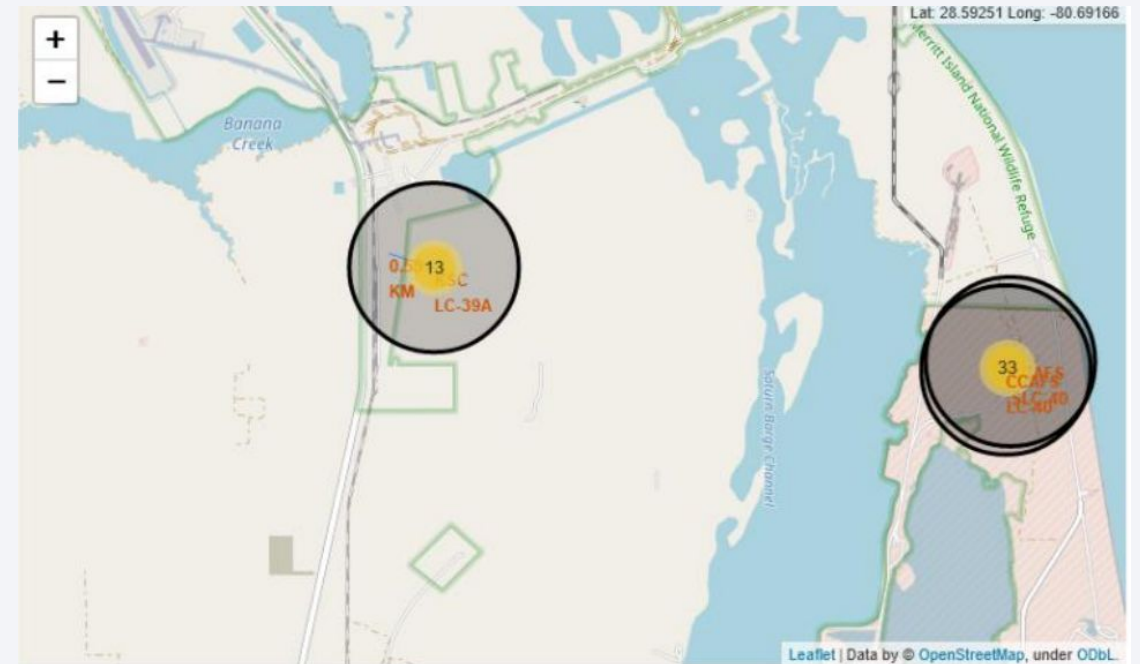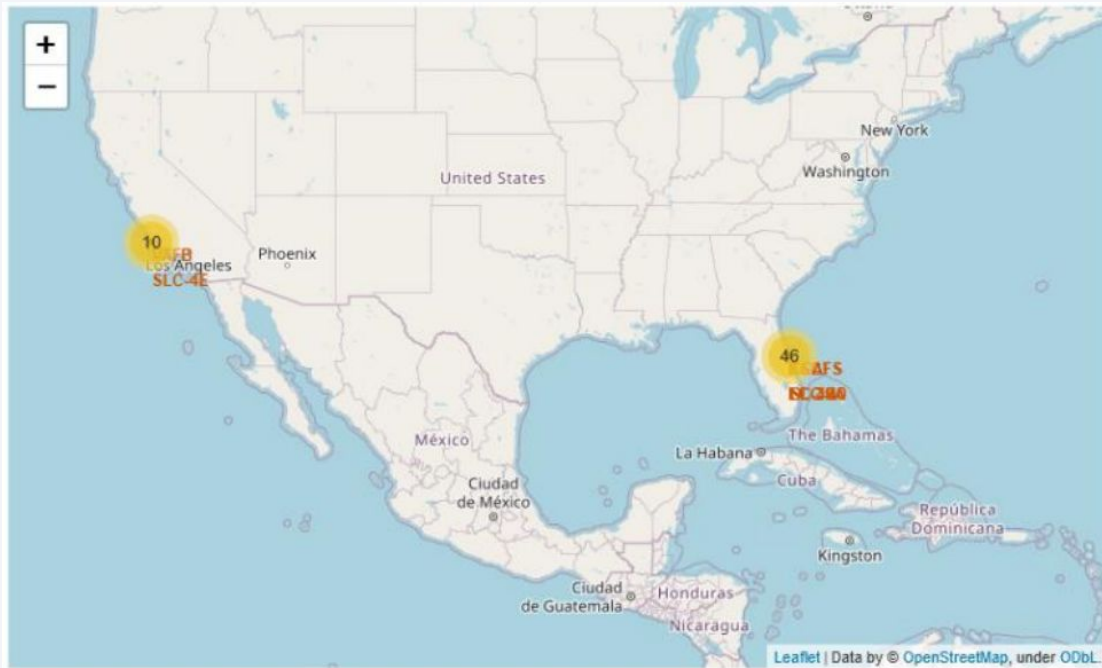

Results

- Exploratory data analysis results:
 - Predictive Analysis showed that Decision Tree Classifier is the best model to predict successful landings, having accuracy over 86% and accuracy for test data over 83%..

Model	Accuracy	TestAccuracy
LogReg	0.84643	0.83333
SVM	0.84821	0.83333
Tree	0.8625	0.83333
KNN	0.84821	0.83333

The background of the slide is an abstract composition. It features a solid blue area on the left side, which transitions into a dynamic pattern of diagonal streaks in shades of blue, red, and teal on the right. These streaks have a textured, almost woven appearance. Overlaid on this pattern is a faint, light blue grid that recedes into the distance, creating a sense of depth and perspective.

Section 2

Insights drawn from EDA


Flight Number vs. Launch Site

- According to the plot above, it's possible to verify that the best launch site
- nowadays is CCAF5 SLC 40, where most of recent launches were successful
- In second place VAFB SLC 4E and third place KSC LC 39A
- It's also possible to see that the general success rate improved over time.



Payload vs. Launch Site

- Payloads over 9,000kg (about the weight of a school bus) have excellent success rate;
- Payloads over 12,000kg seems to be possible only on CCAFS SLC 40 and KSC LC 39A launch sites.

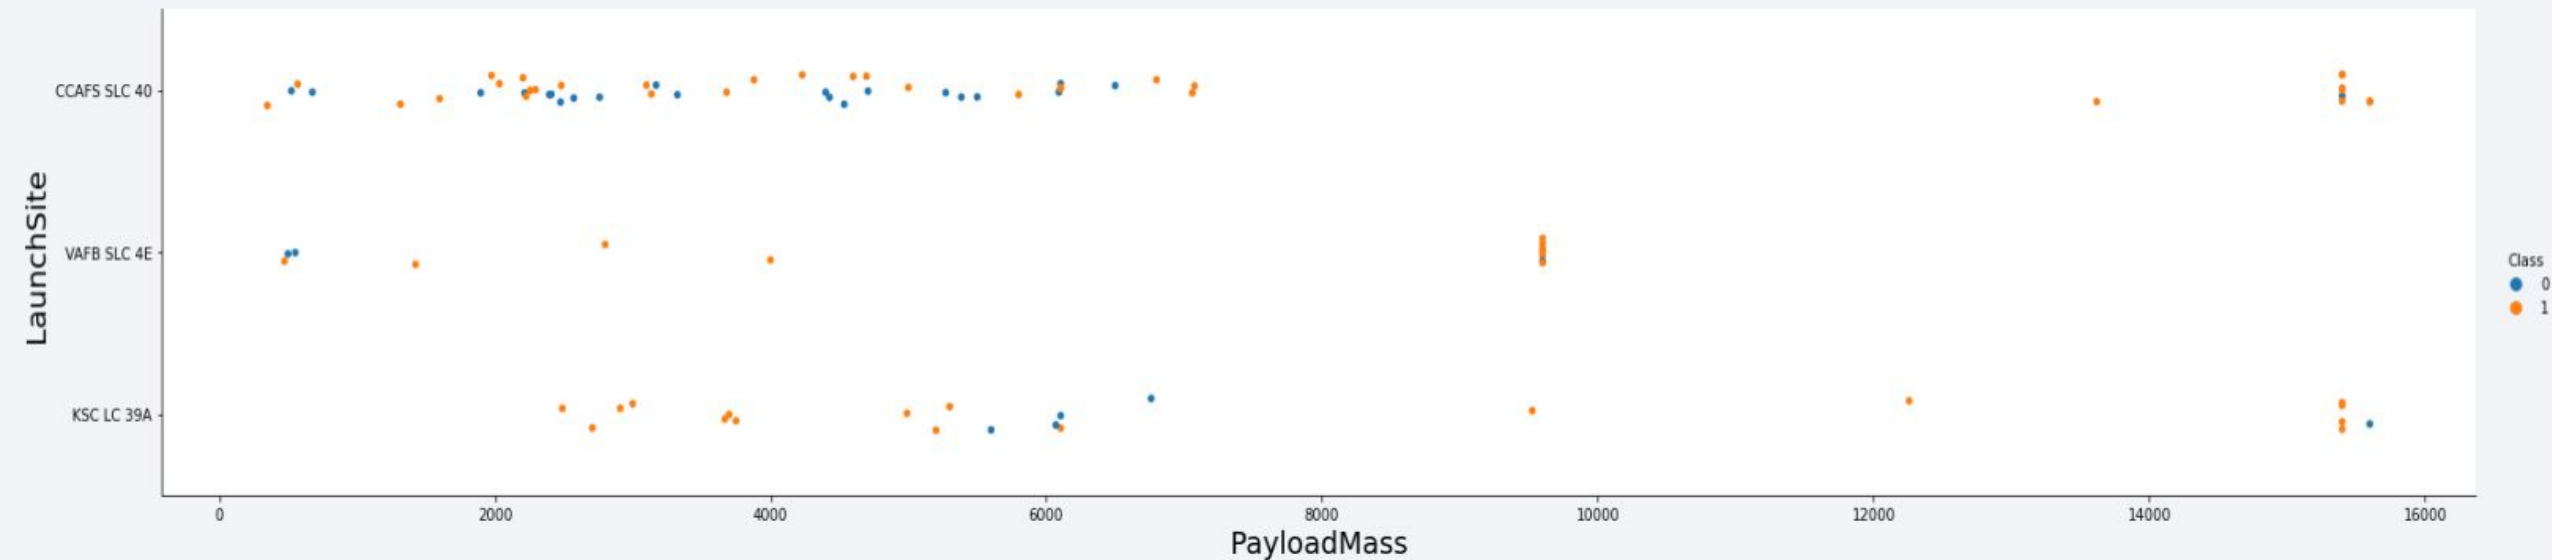

Success Rate vs. Orbit Type

Analyze the plotted bar chart try to find which orbits have high success rate.

100% High success rate!


- ES-L1
- GEO
- HEO
- SSO

0% success rate!

- SO

50% to 75% success rate!


- GTO
- ISS
- LEO
- MEO
- PO

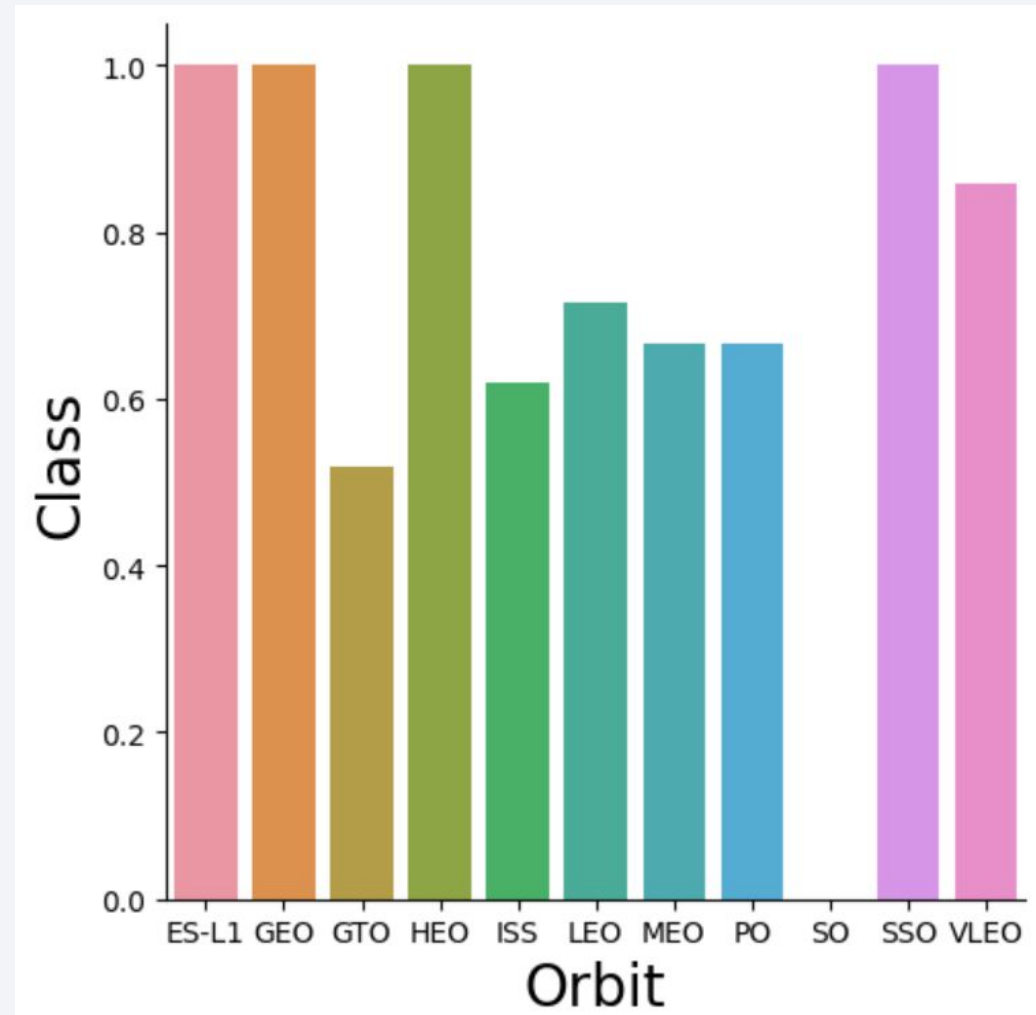

Flight Number vs. Orbit Type

Apparently, success rate improved over time to all orbits;


VLEO orbit seems a new business opportunity, due to recent increase of its frequency.

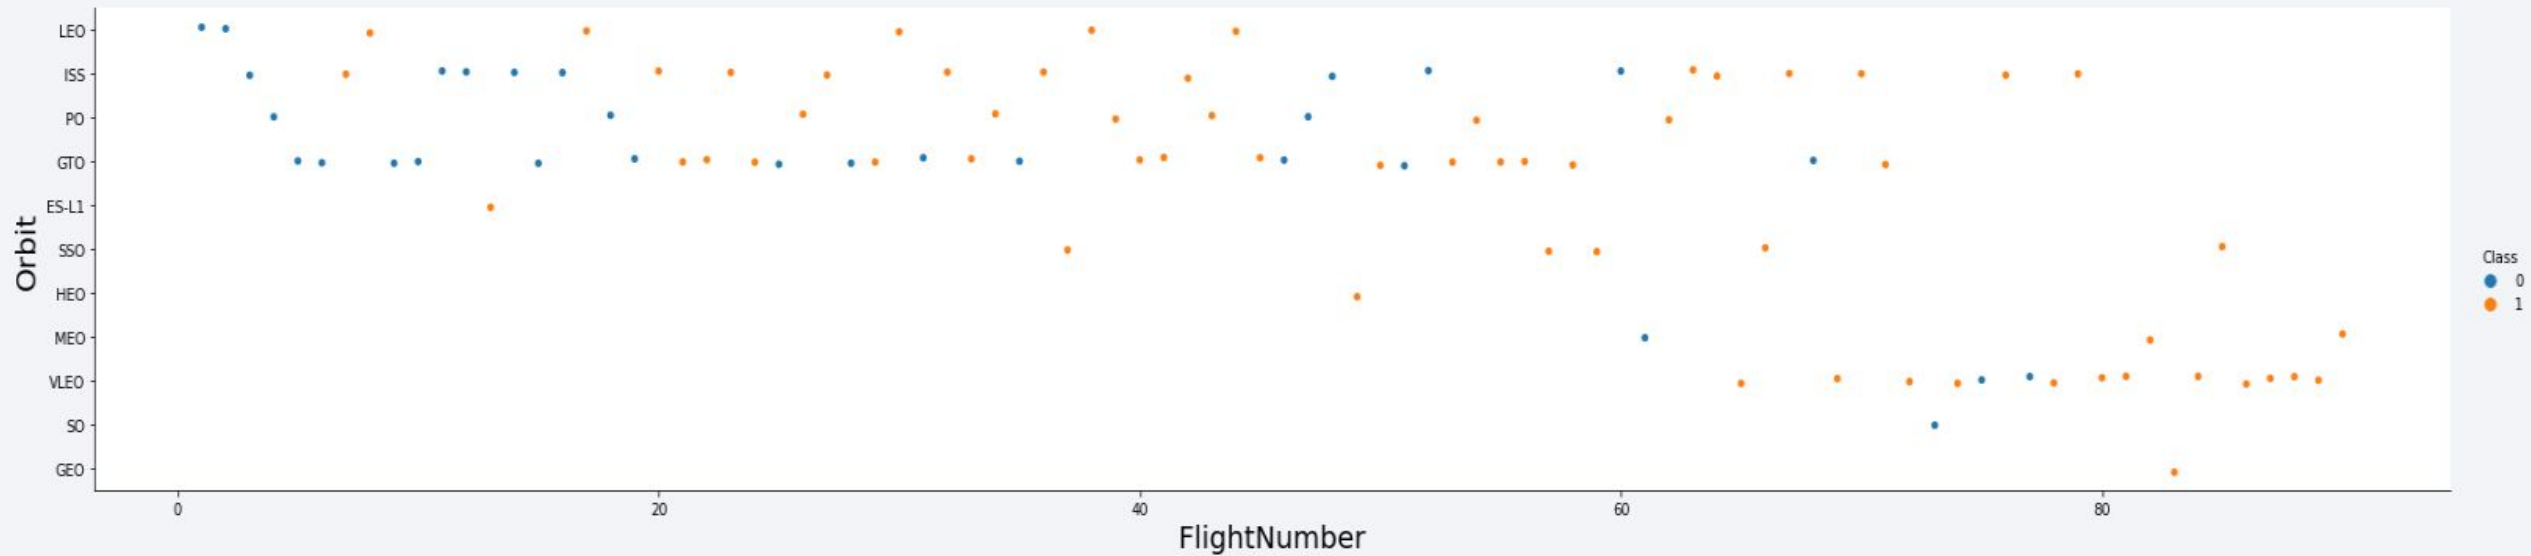

Payload vs. Orbit Type

Apparently, there is no relation between payload and success rate to orbit GTO;


- ISS orbit has the widest range of payload and a good rate of success;
- There are few launches to the orbits SO and GEO

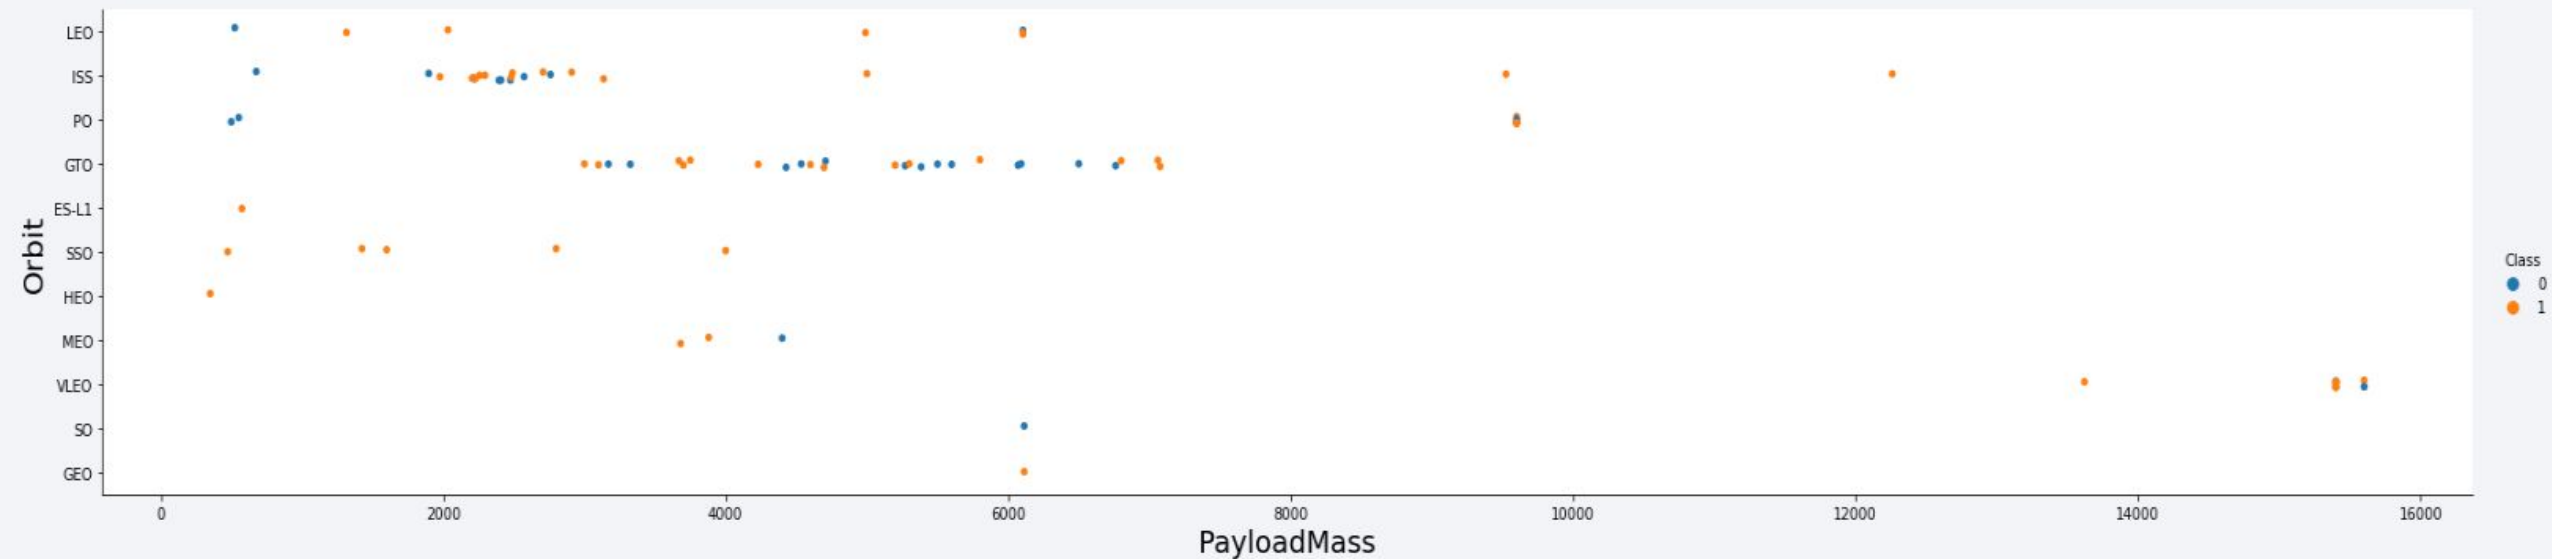

Launch Success Yearly Trend

Success rate started increasing in 2013 and kept until 2020

- It seems that the first three years were a period of adjusts and improvement of technology.

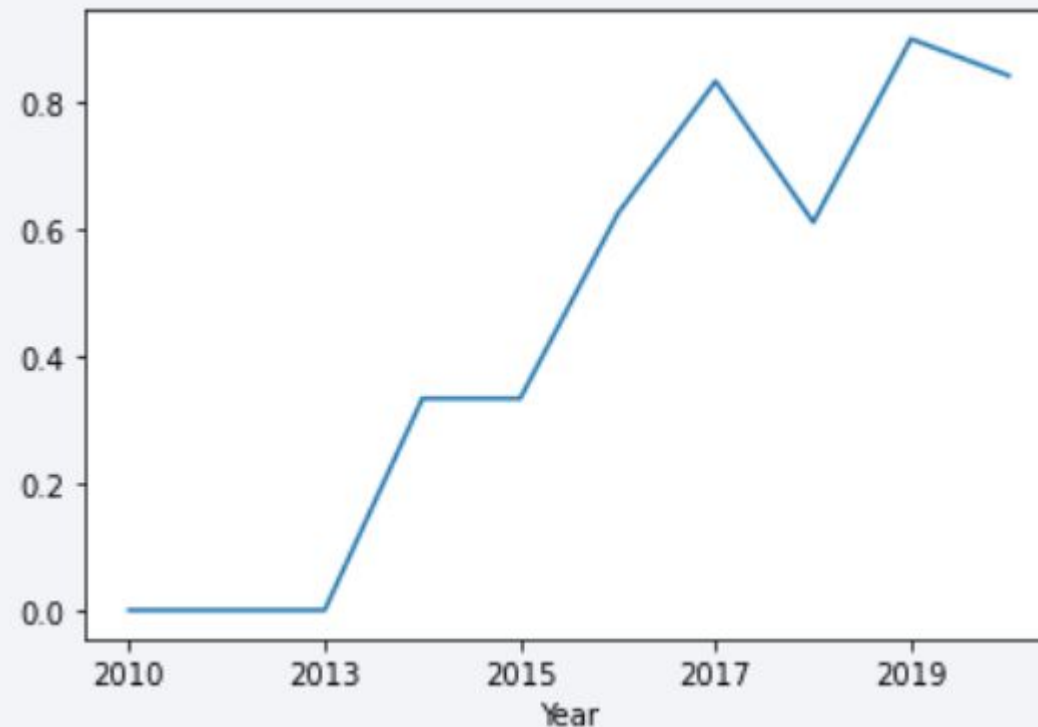

All Launch Site Names

- According to data, there are four launch sites:

Launch Site
CCAFS LC-40
CCAFS SLC-40
KSC LC-39A
VAFB SLC-4E

Launch Site Names Begin with 'CCA'

- Find 5 records where launch sites begin with 'CCA'

Date	Time UTC	Booster Version	Launch Site	Payload	Payload Mass kg	Orbit	Customer	Mission Outcome	Landing Outcome
2010-06-04	18:45:00	F9 v1.0 B0003	CCAFS LC-40	Dragon Spacecraft Qualification Unit	0	LEO	SpaceX	Success	Failure (parachute)
2010-12-08	15:43:00	F9 v1.0 B0004	CCAFS LC-40	Dragon demo flight C1, two CubeSats, barrel of Brouere cheese	0	LEO (ISS)	NASA (COTS) NRO	Success	Failure (parachute)
2012-05-22	07:44:00	F9 v1.0 B0005	CCAFS LC-40	Dragon demo flight C2	525	LEO (ISS)	NASA (COTS)	Success	No attempt
2012-10-08	00:35:00	F9 v1.0 B0006	CCAFS LC-40	SpaceX CRS-1	500	LEO (ISS)	NASA (CRS)	Success	No attempt
2013-03-01	15:10:00	F9 v1.0 B0007	CCAFS LC-40	SpaceX CRS-2	677	LEO (ISS)	NASA (CRS)	Success	No attempt

Total Payload Mass

- Total payload carried by boosters from NASA:

Total Payload (kg)
111.268

- Total payload calculated above, by summing all payloads whose codes contain 'CRS', which corresponds to NASA.

Average Payload Mass by F9 v1.1

- Average payload mass carried by booster version F9 v1.1:

Avg Payload (kg)
2.928

Filtering data by the booster version above and calculating the average payload mass we obtained the value of 2,928 kg.

First Successful Ground Landing Date

By filtering data by successful landing outcome on ground pad and getting the minimum value for date it's possible to identify the first occurrence, that happened on 12/22/2015.

Min Date
2015-12-22

By filtering data by successful landing outcome on ground pad and getting the minimum value for date it's possible to identify the first occurrence, that happened on 12/22/2015.

Successful Drone Ship Landing with Payload between 4000 and 6000

- Boosters which have successfully landed on drone ship and had payload mass greater than 4000 but less than 6000

- Selecting distinct booster versions according to the filters, these 4 are the result.

Booster Version
F9 FT B1021.2
F9 FT B1031.2
F9 FT B1022
F9 FT B1026

Total Number of Successful and Failure Mission Outcomes

- Number of successful and failure mission outcomes:

Mission Outcome	Occurrences
Success	99
Success (payload status unclear)	1
Failure (in flight)	1

- Grouping mission outcomes and counting records for each group led us to the summary above.

Boosters Carried Maximum Payload

- Boosters which have carried the maximum payload mass

Booster Version (...)
F9 B5 B1048.4
F9 B5 B1048.5
F9 B5 B1049.4
F9 B5 B1049.5
F9 B5 B1049.7
F9 B5 B1051.3

Booster Version
F9 B5 B1051.4
F9 B5 B1051.6
F9 B5 B1056.4
F9 B5 B1058.3
F9 B5 B1060.2
F9 B5 B1060.3

- These are the boosters which have carried the maximum payload mass registered in the dataset

2015 Launch Records

Failed landing outcomes in drone ship, their booster versions, and launch site names for in year 2015

Booster Version	Launch Site
F9 v1.1 B1012	CCAFS LC-40
F9 v1.1 B1015	CCAFS LC-40

- The list above has the only two occurrence

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

- Ranking of all landing outcomes between the date 2010-06-04 and 2017-03-20:

Landing Outcome	Occurrences
No attempt	10
Failure (drone ship)	5
Success (drone ship)	5
Controlled (ocean)	3
Success (ground pad)	3
Failure (parachute)	2
Uncontrolled (ocean)	2
Precluded (drone ship)	1

- This view of data alerts us that “No attempt” must be taken in account.


A satellite view of Earth from space, showing the curvature of the planet and city lights at night. The image is a composite of a dark blue sky with stars and a view of the Earth's surface from space. The Earth's surface is mostly dark, with a thin layer of atmosphere visible along the horizon. The city lights are concentrated in the lower right quadrant, showing a dense network of urban areas. The text "Section 3" is overlaid on the left side of the image.

Section 3

Launch Sites Proximities Analysis


All launch sites

Launch sites are near sea, probably by safety, but not too far from roads and railroads.

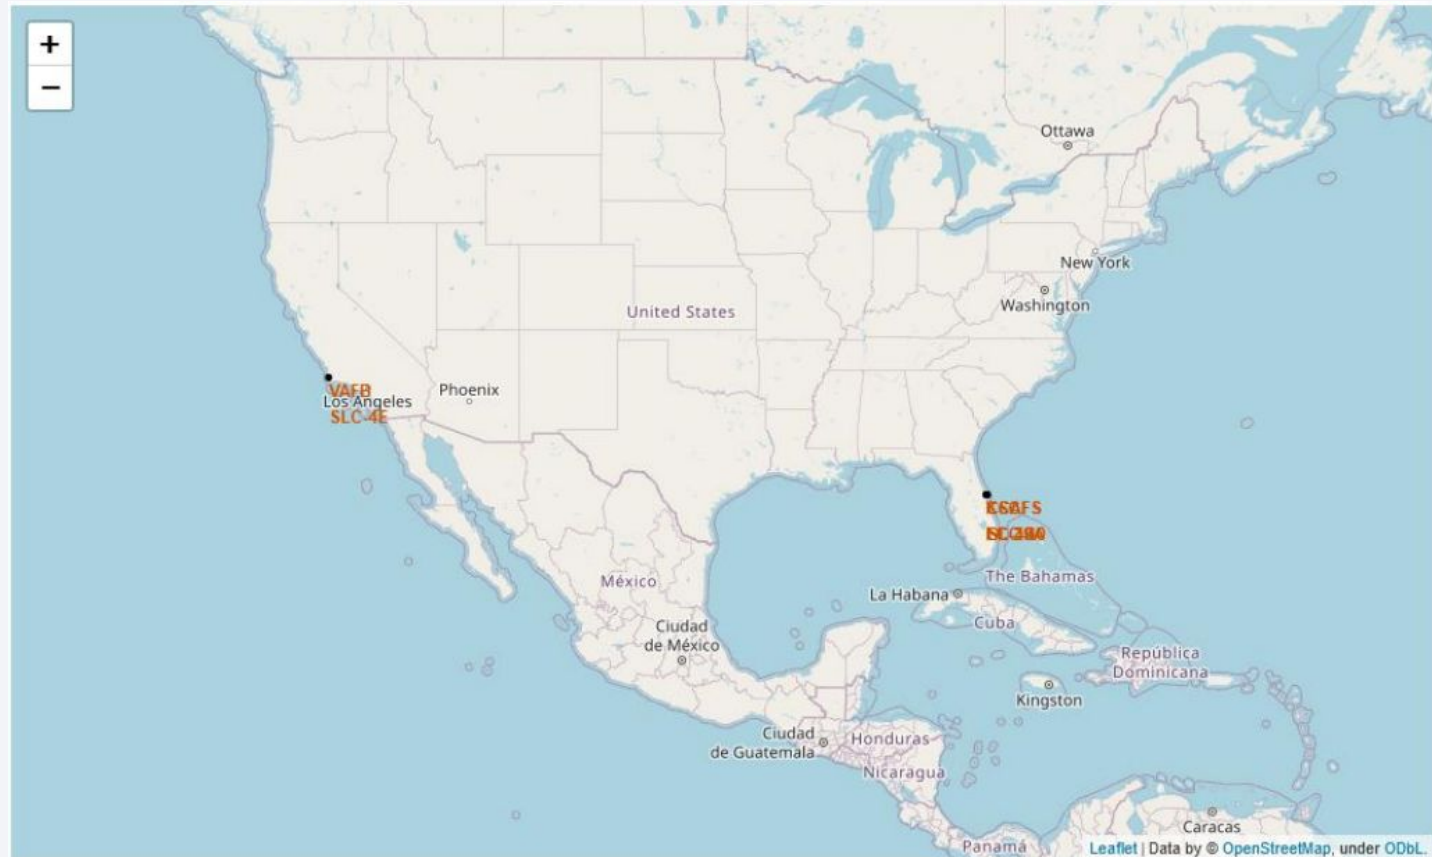

Launch Outcomes by Site


- Example of KSC LC-39A launch site launch outcomes

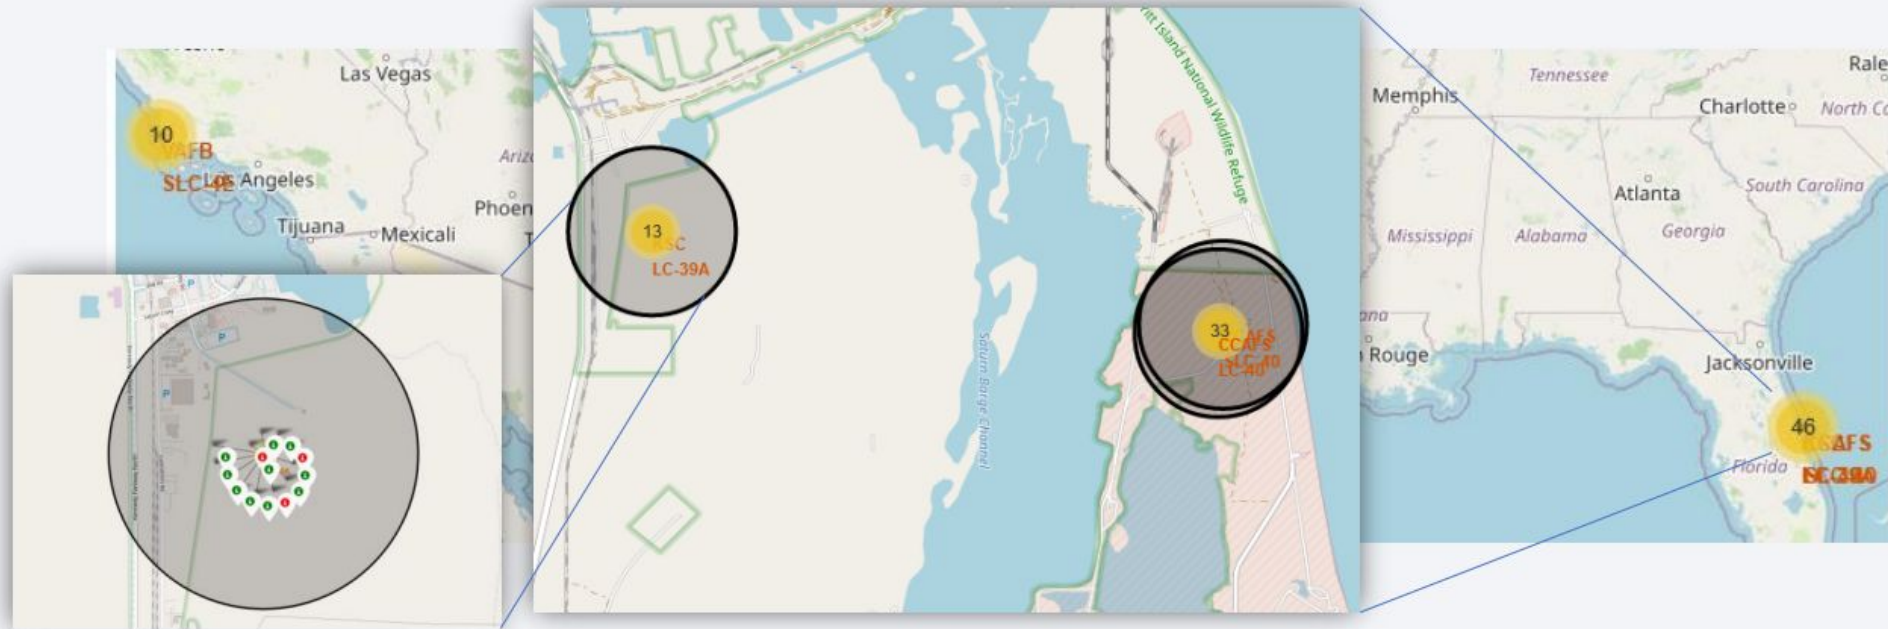

- Green markers indicate successful and red ones indicate failure.

Logistics and Safety

Launch site KSC LC-39A has good logistics aspects, being near railroad and road and relatively far from inhabited areas.

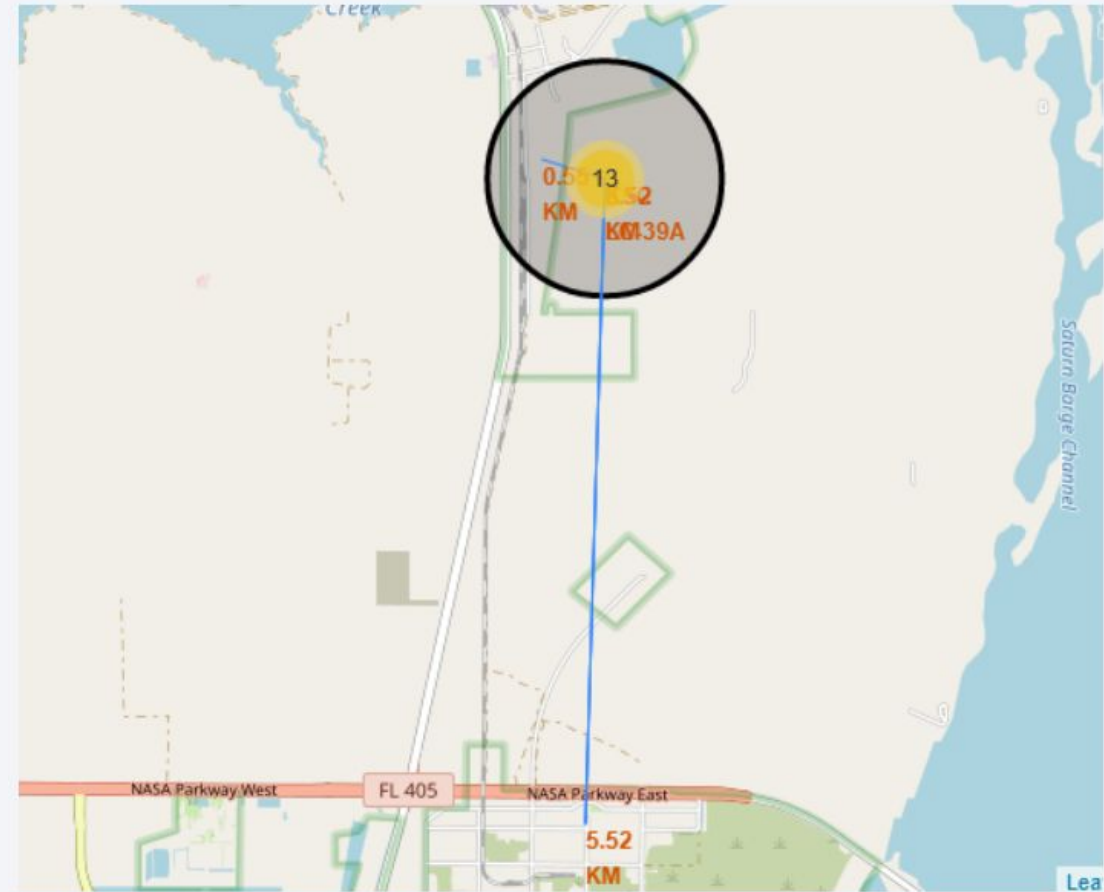



Section 4


Build a Dashboard with Plotly Dash

Successful Launches by Site

The place from where launches are done seems to be a very important factor of success of missions.



Launch Success Ratio for KSC LC-39A

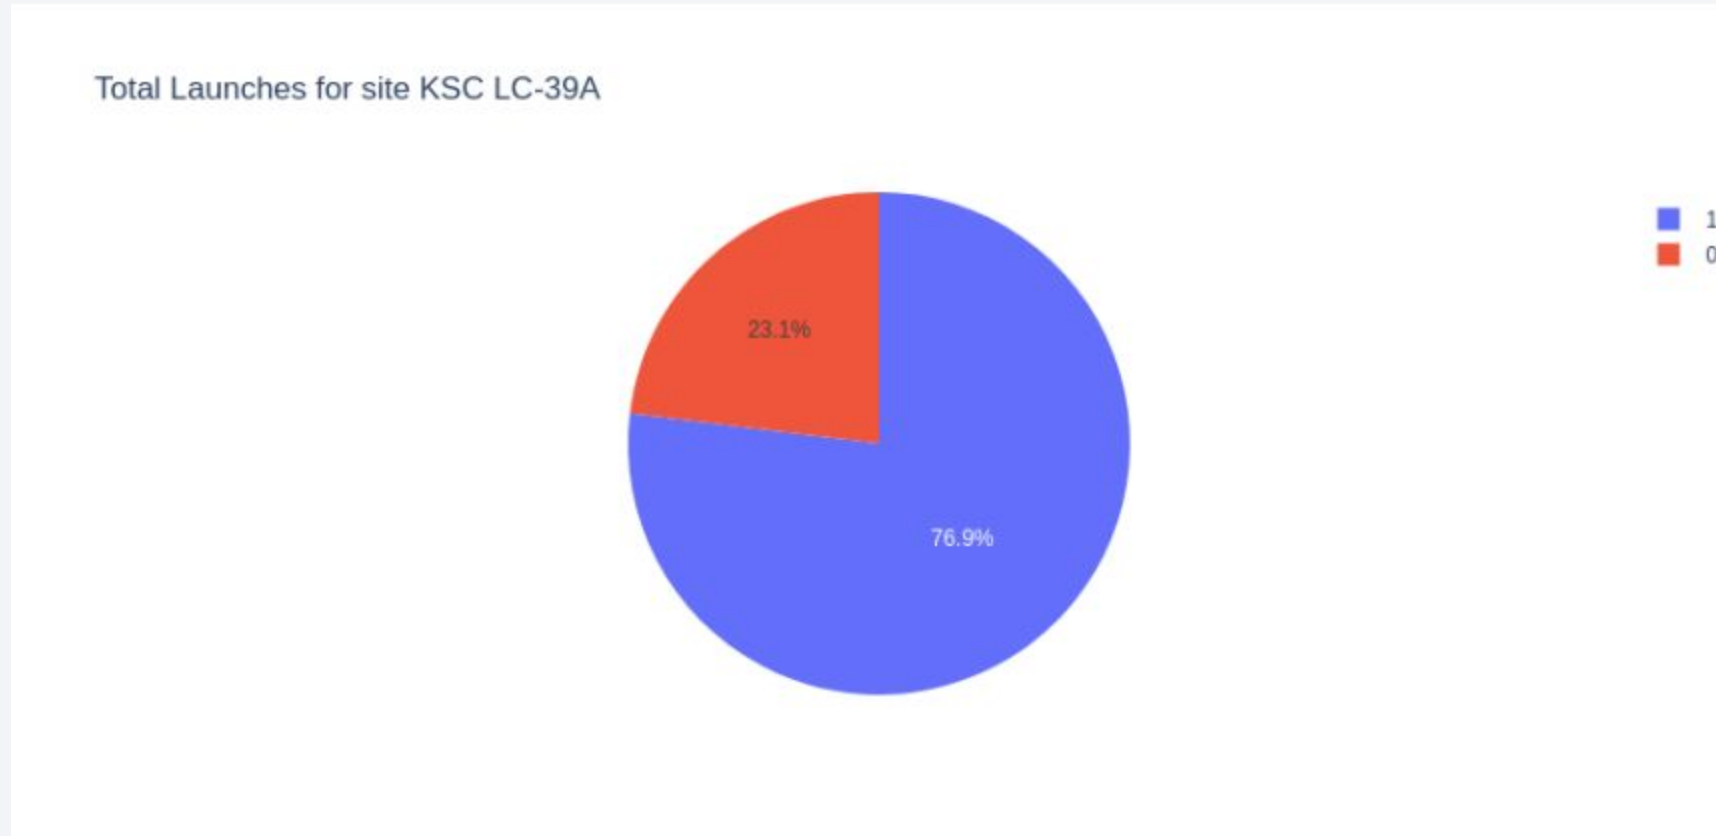


76.9% of launches are successful in this sit

Payload vs. Launch Outcome

Payload range (Kg):



All sites - payload mass between 1,000kg and 10,000kg

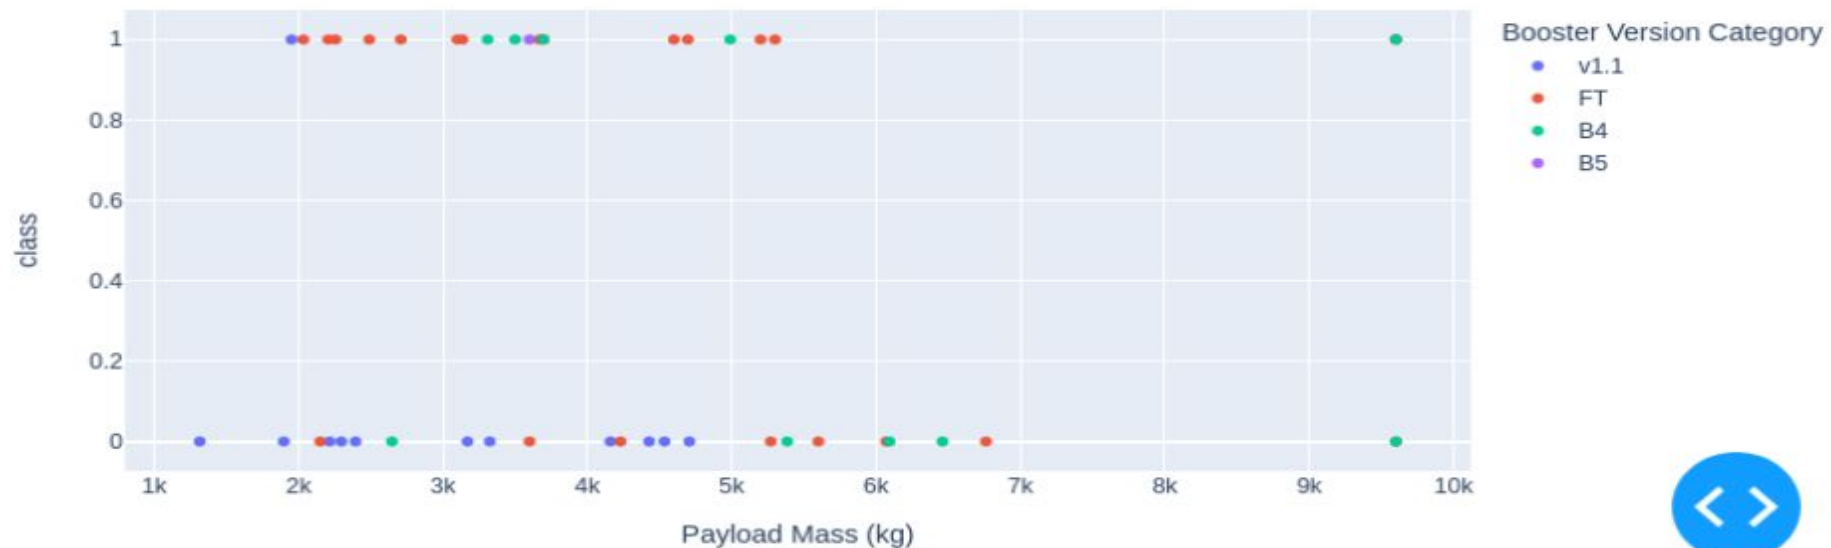

Payloads under 6,000kg and FT boosters are the most successful combination

Section 5

Predictive Analysis (Classification)


Classification Accuracy

- Four classification models were tested, and their accuracies are plotted beside
- The model with the highest classification accuracy is Decision Tree Classifier, which has accuracies over than 87%.

Model	Accuracy	TestAccuracy
LogReg	0.84643	0.83333
SVM	0.84821	0.83333
Tree	0.8625	0.83333
KNN	0.84821	0.83333

Confusion Matrix of Decision Tree Classifier

- Confusion matrix of Decision Tree Classifier

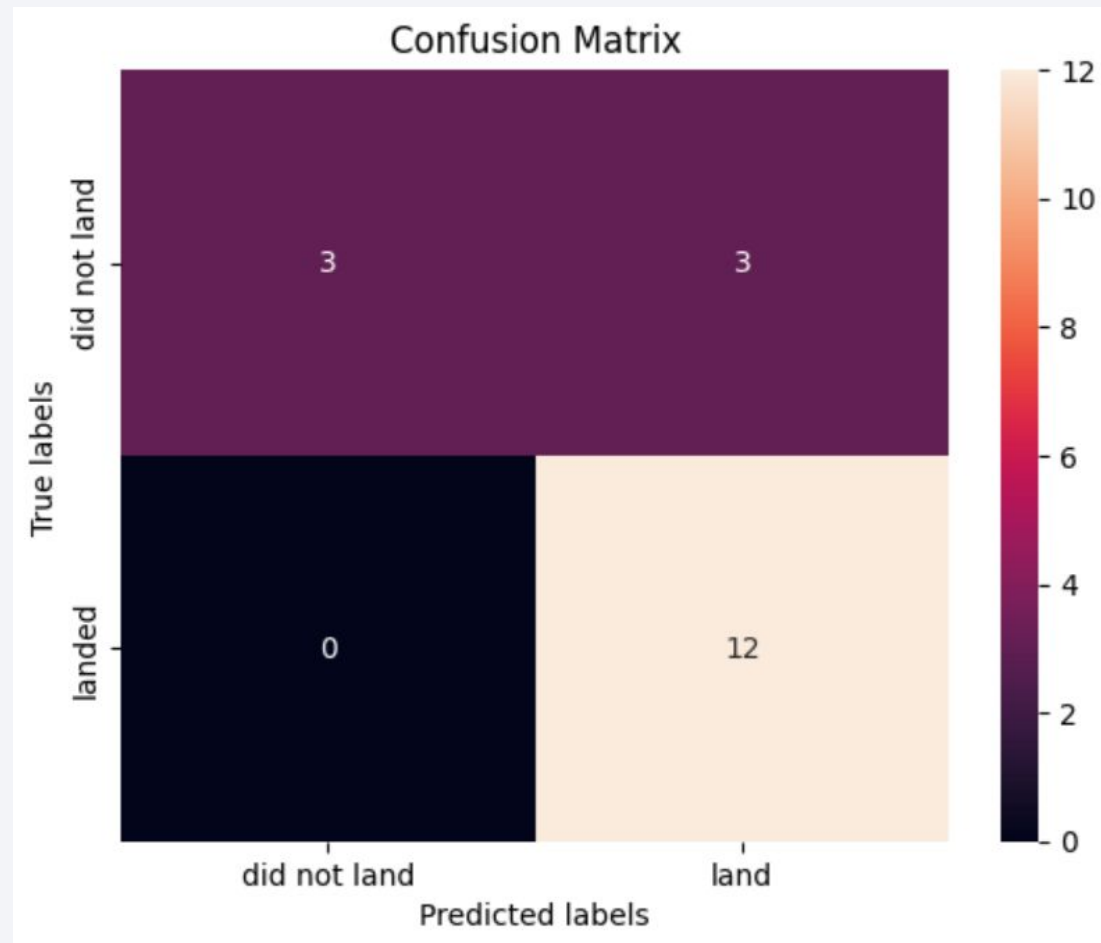

Conclusions

- Different data sources were analyzed, refining conclusions along the process
- The best launch site is KSC LC-39A
- Launches above 7,000kg are less risky
- Although most of mission outcomes are successful, successful landing outcomes seem to improve over time, according the evolution of processes and rockets.
- Decision Tree Classifier can be used to predict successful landings and increase profits.

Appendix

- As an improvement for model tests, it's important to set a value to `np.random.seed` variable.

Thank you!

