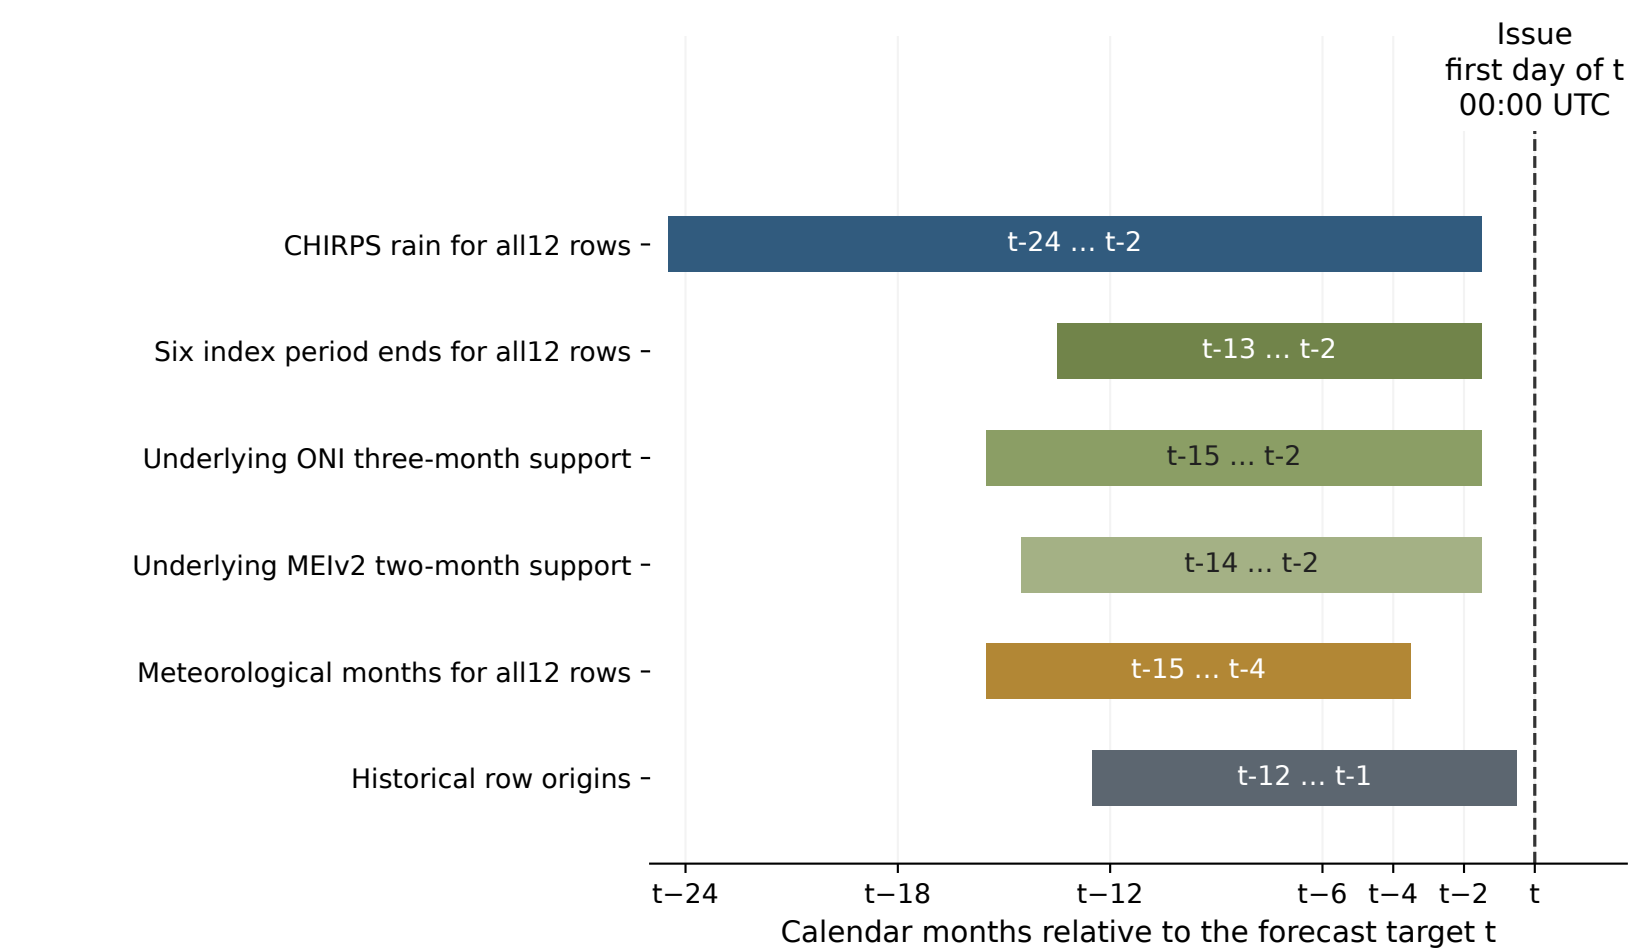

Each sequence has12 rows; the availability sensitivity adds one month of delay.
Support rules are conservative assumptions; final archives do not establish operational vintages.