PRACTICAL LAB: JAVASCRIPT OPERATORS MASTERY

Course: DFK20013 Web Design Technology

Topic: 3.1.1 Variables, Data Types, and Operators

Duration: 60 – 90 Minutes

Student Name	NURUL AIN NABILAH BINTI BAHARUDDIN
Registration No	10DIT25F1048
Date	2 MARCH 2026

---

1. Learning Outcomes

By the end of this lab, students should be able to:

- Implement **Arithmetic Operators** for calculations.
- Use **Assignment Operators** to update values efficiently.
- Control application states using **Increment/Decrement**.
- Validate user access using **Relational** and **Logical** operators.

---

2. Practical Task: The All-in-One Operator Workshop

Create a file named lab_operators.html. Copy and complete the coding below.

HTML

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <title>DFK20013: JS Operators Workshop</title>

    <style>

        body { font-family: 'Segoe UI', sans-serif; max-width: 850px;
margin: 2rem auto; background-color: #f0f2f5; padding: 20px; color:
#333; }

        section { background: white; padding: 25px; border-radius: 12px;
```

```
margin-bottom: 25px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }

        h2 { color: #2c3e50; border-left: 5px solid #3498db; padding-
left: 10px; margin-top: 0; }

        .output-box { background: #2c3e50; color: #27ae60; padding: 15px;
border-radius: 6px; font-family: 'Courier New', monospace; margin-top:
10px; }

        .short-note { background: #fff3cd; color: #856404; padding: 15px;
border-radius: 6px; margin-top: 15px; border-left: 5px solid #ffc107;
display: none; font-size: 0.9rem; }

        input { padding: 8px; width: 100px; border-radius: 4px; border:
1px solid #ccc; }

        button { padding: 8px 20px; background: #3498db; color: white;
border: none; border-radius: 4px; cursor: pointer; font-weight: bold; }

        button:hover { background: #2980b9; }

        code { background: #eee; padding: 2px 4px; border-radius: 3px;
font-weight: bold; color: #d63384; }

    </style>

</head>
```

```
<body>



    <header style="text-align: center; margin-bottom: 30px;">

        <h1>JavaScript Operators Mastery</h1>

        <p>Follow the steps and observe the Console and UI outputs.</p>

    </header>
```

```
    <section>

        <h2>Task 1: Basic Arithmetic (Check Console)</h2>

        <p>This task demonstrates background calculations using
<code>+</code>, <code>-</code>, <code>*</code>, <code>/</code>,
<code>**</code>, and <code>%</code>.</p>

        <button onclick="runTask1()">Run Console Logic</button>

    </section>
```

```
    <section>

        <h2>Task 2: POS System (Arithmetic & Assignment)</h2>

        <p>Price: RM 50.00. <strong>Promo:</strong> Buy > 4 units to get
RM 20.00 discount.</p>

        Quantity: <input type="number" id="qty" value="1">

        <button onclick="runTask2()">Calculate Total</button>

        <div id="outPOS" class="output-box">Final Total: RM 0.00</div>
```

```
        <div id="notePOS" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 3: Stock Control (Increment & Decrement)</h2>

        <p>Simulating inventory updates.</p>

        Stock Level: <span id="stockVal" style="font-size: 1.5rem; font-
weight: bold;">10</span><br><br>

        <button onclick="runTask3('inc')">Add (+)</button>

        <button onclick="runTask3('dec')"
style="background:#6c757d;">Remove (-)</button>

        <div id="noteStock" class="short-note"></div>

    </section>
```

```
    <section>
<h2>Task 4: Gate Access (Relational & Logical)</h2>
<p>Rules: Age 18+ OR (Age 13+ AND Parent present).</p>
Age: <input type="number" id="age" placeholder="Age">
<label><input type="checkbox" id="parent"> With
Parent?</label><br><br>
<button onclick="runTask4()" style="background:#27ae60;">Verify
Entry</button>
<div id="outSecurity" class="output-box">Status: Waiting...</div>
<div id="noteSecurity" class="short-note"></div>
</section>
```

Inside the <script> tag, type all the following code:

JAVASCRIPT:

1.

```
<script>
    // Helper to show explanations
    function showNote(id, text) {
        const noteDiv = document.getElementById(id);
        noteDiv.style.display = 'block';
        noteDiv.innerHTML = text;
    }
```

2.

```javascript
// --- TASK 1: ARITHMETIC (BASIC) ---
function runTask1() {
    console.log("--- Task 1: Arithmetic Operations ---");
    let students = 31;
    students = students + 1;   // Addition
    students = students - 2;   // Subtraction
    students = students * 2;   // Multiplication
    students = students / 2;   // Division
    let power = 10 ** 2;       // Exponentiation (100)
    let remainder = 31 % 2;    // Modulus (1 - Odd)

    console.log("Final Student Count: " + students);
    console.log("10 to the power of 2: " + power);
    console.log("Remainder of 31/2: " + remainder);
    alert("Check Browser Console (F12) for results!");
}
```

3.

```javascript
// --- TASK 2: POS SYSTEM (ARITHMETIC & ASSIGNMENT) ---
function runTask2() {
    let price = 50;
    let qty = parseInt(document.getElementById('qty').value);

    // a. Arithmetic Operator (*)
    let total = price * qty;
    let note = "<b>Subtopic (a) Arithmetic:</b> <code>*</
    code> multiplied " + price + " by " + qty + ".<br>";

    // b. Assignment Operator (-=)
    if (qty > 4) {
        total -= 20; // Shorthand for total = total - 20
        note += "<b>Subtopic (b) Assignment:</b> <code>-=</
        code> updated the total by subtracting the discount.";
    }

    document.getElementById('outPOS').textContent = "Final
    Total: RM " + total.toFixed(2);
    showNote('notePOS', note);
}
```

4.

```
// --- TASK 3: INCREMENT & DECREMENT ---
let stock = 10;
function runTask3(type) {
    let note = "";
    if (type === 'inc') {
        stock++; // (c) Increment
        note = "<b>Subtopic (c) Increment:</b> <code>++</
        code> increased the stock by 1.";
    } else {
        stock--; // (c) Decrement
        note = "<b>Subtopic (c) Decrement:</b> <code>--</
        code> decreased the stock by 1.";
    }
    document.getElementById('stockVal').textContent = stock;
    showNote('noteStock', note);
}
```

5.

```
    // --- TASK 4: RELATIONAL & LOGICAL ---
    function runTask4() {
        let age = parseInt(document.getElementById('age').value);
        let hasParent = document.getElementById('parent').checked;
        let status = document.getElementById('outSecurity');

        if (isNaN(age)) return alert("Please enter a valid age.");

        // d. Relational: >=
        // e. Logical: || (OR), && (AND)
        let isEligible = (age >= 18) || (age >= 13 && hasParent);

        status.textContent = isEligible ? "Status: ACCESS GRANTED
        ✅" : "Status: ACCESS DENIED ❌";
        status.style.color = isEligible ? "#27ae60" : "#ff4d4d";

        let note = "<b>Subtopic (d) Relational:</b> <code>>=</
        code> compared Age (" + age + ") to the limit.<br>";
        note += "<b>Subtopic (e) Logical:</b> Used <code>||</
        code> (OR) and <code>&&</code> (AND) to combine rules.";
        showNote('noteSecurity', note);
    }
</script>
```

Capture a screenshot of the output from the previous steps. ***Observe*** *the results and* ***explain*** *your understanding of the process.*

1.	***Screenshot of the output*** 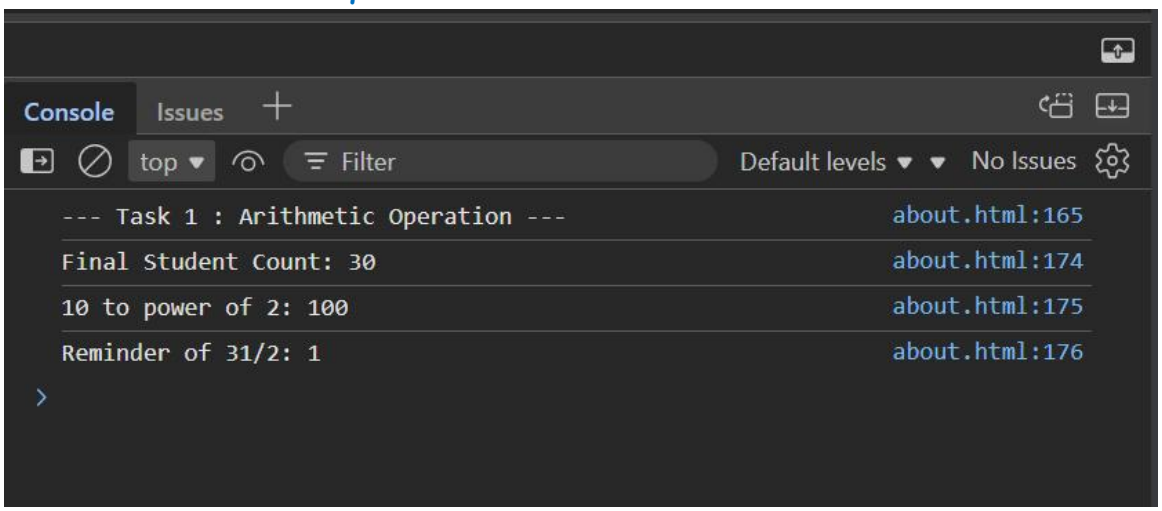
	Explanation This function finds an HTML element by its `id`, makes it visible (`display: block`), and sets its content to the given `text`. All results displayed using console that prints the output in the browser (F12)

2.	***Screenshot of the output*** 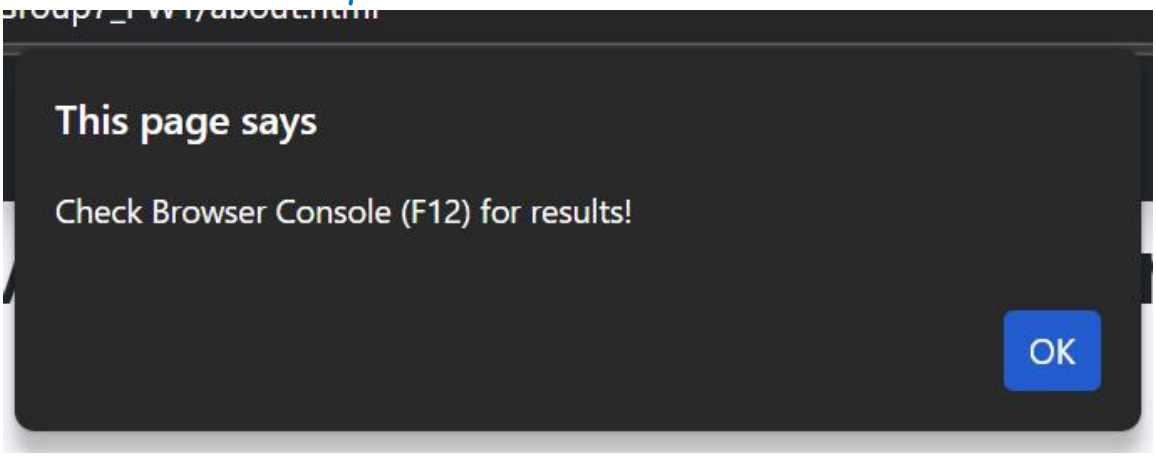
	Explanation function demonstrates basic arithmetic operators in JavaScript by modifying a variable and displaying the results in the console while alerting the user to check the browser console.

3.	*Screenshot of the output* 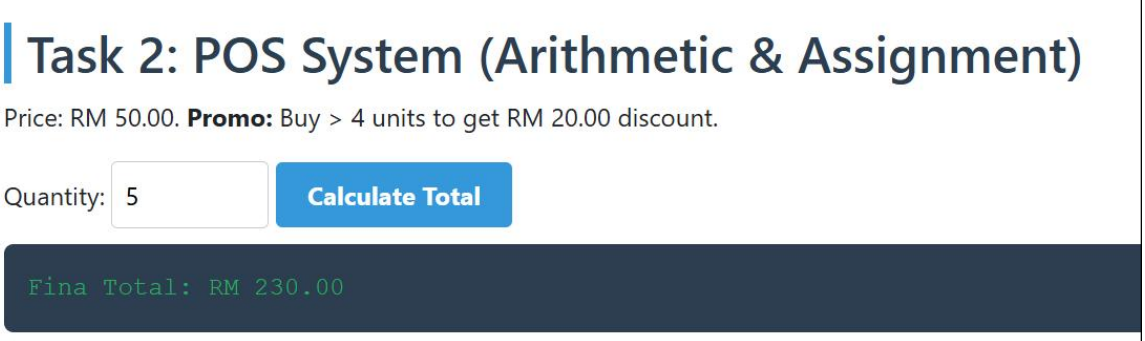
	Explanation function calculates the total price based on quantity, applies a discount using the `-=` assignment operator if more than 4 units are bought. The calculation runs when the "Calculate Total " button is clicked

4.	*Screenshot of the output* 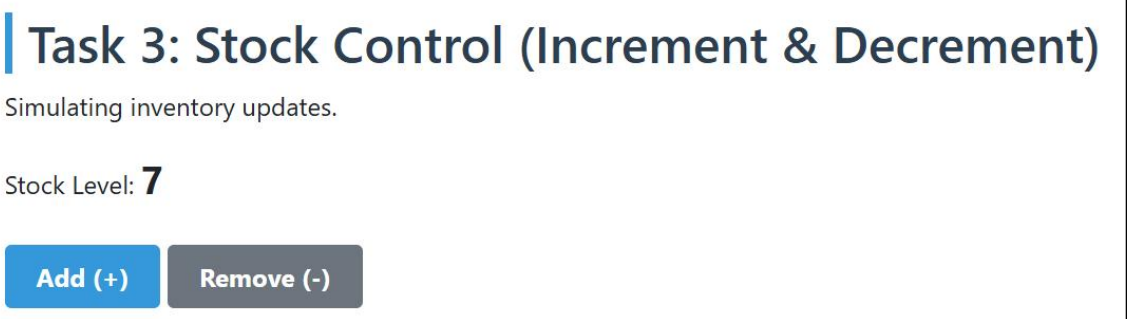 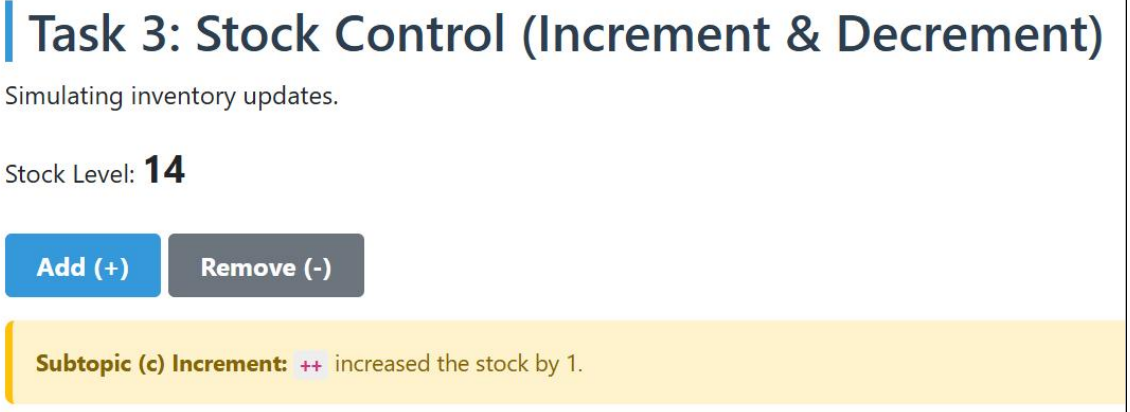
	Explanation function increases or decreases the `stock` value using the `++` or `--` operators based on the `type` argument. Each button updates the value dynamically making the number changes immediately on the page.

5.

Screenshot of the output

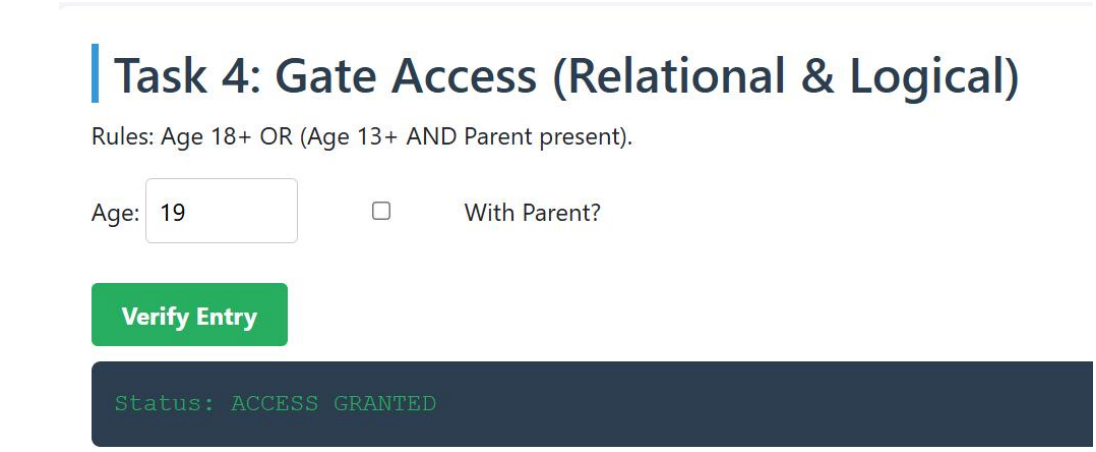

Explanation

function checks entry eligibllity based on age and parental consent using relational (>=) and logical (`||` and `&&`) operator.

3. Quick Check (Reflection)

Instruction: Answer the following questions based on your coding results.

1. **Modulus Utility:** Based on Task 1, if students % 2 returns 0, is the number even or odd?

= **even**

2. **Shorthand Power:** In Task 2, rewrite total -= 20 using the standard assignment method.

= **Total = total - 20;**

3. **Logical Priority:** In Task 4, why did we put (age >= 13 && hasParent) in parentheses?

= parenthese making the condition evaluated first before other conditions (age >=18). this avoid logica error .

4. **Time Calculation:** (Extra Challenge) If a variable totalMinutes = 130, write the formula to find the remaining minutes after converting to hours using the **Modulus** operator.

= **let remainingMinutes = totalMinutes % 60;**